



Ge Tooling

WWW.GETOOLING.IT



CATALOGUE 2024



Reg. Number	1238 - A	Valid From	2022-03-21
First issue date	1999-11-09	Last change date	2022-05-17
Valid Until	2025-04-30	IAF Sector	29

Quality Management System Certificate **ISO 9001:2015**

We certify that the Quality Management System of the Organization:

GE TOOLING S.r.l.

Is in compliance with the standard UNI EN ISO 9001:2015 for the following products/services:

High precision metal cutting tools trading of standard catalogue and customized products based on customers' specifics.


President
Giuseppe Belcredi

TRUE COPY

The maintaining of the certification is subject to annual surveillance and dependent on the observance of Kiwa Cermet Italia contractual requirements.

This certificate is composed of 1 page.

Kiwa Cermet Italia S.p.A.
Società con socio unico,
soggetta all'attività di
direzione e coordinamento di
Kiwa Italia Holding Srl
Via Cadriano, 23
40057 Granarolo dell'Emilia
(BO)
Tel +39.051.459.3.111
Fax +39.051.763.382
E-mail: info@kiwacermet.it
www.kiwa.it

GE TOOLING S.r.l.

Registered Headquarters

- Via Elsa Morante, 71 41123 Modena Italia

Certified Sites

- Via Elsa Morante, 71 41123 Modena Italia


CERMET




INDICE - INDEX

 MILLING	3
 MINIMILL	23
 MOULDMILL	35
 MICROTOOLS AMS	41
 MICROTOOLS	48
 MINITOLS	49
 GROOVING	89
 GE DRILLS	95
 NICECUT	101
 YES-DRILL	107
 SLIM-CHUCK	115
 INSERTS	121
 SPEED-TIGER	133
 RICAMBI	173
 PARAMETRI INSERTI	177



FRESE PER SPALLAMENTI _ECKFRÄSER_ SHOULDER MILLING CUTTERS

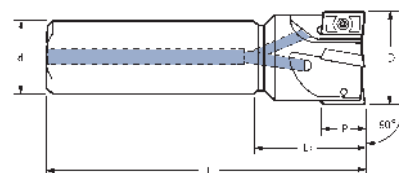ALTO AVANZAMENTO
HOCHVORSCHUB
HIGH FEED**741 C / W.N**

	D	d	L	L1	p	Z				KG		STOCK	PRICELIST on getooling.com
741C W D10/2 N	10	10	80	28	5,2	2				0,060		●	
741C W D12/3 N	12	12	80	30	5,2	3				0,080		●	
741C W D14/3 N	14	12	85	32	5,2	3				0,120		●	
741W W D16/4 N	16	16	85	35	5,2	4				0,160		●	
741W W D18/4 N	18	16	90	38	5,2	4				0,170		●	
741W W D20/5 N	20	20	90	40	5,2	5				0,300		●	
741W W D25/7 N	25	25	106	50	5,2	7				0,320		●	
741W W D32/8 N	32	25	124	64	5,2	8				0,560		●	

**741 M.N**

	D	d	H	p	z				KG		STOCK	PRICELIST on getooling.com
741M W D32/8 N	32	16	40	5,2	8				0,250		●	
741M W D40/10 N	40	16	40	5,2	10				0,270		●	
741M W D50/11 N	50	22	40	5,2	11				0,430		●	

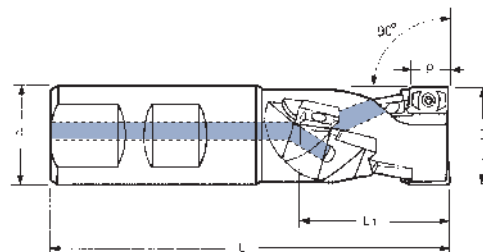**941 W**

	D	dh6	L	L1	p	Fattore K	Z			KG		STOCK	PRICELIST on getooling.com
941W W D16	16	16	80	19,8	5,2	2	8			0,160		●	
941W W D20	20	20	90	24,6	5,2	3	15			0,300		●	
941W W D25	25	25	100	29,4	5,2	5	30			0,320		●	


FRESE PER SPALLAMENTI _ECKFRÄSER_ SHOULDER MILLING CUTTERS



ART. 740 W



ART. 740 W ECO

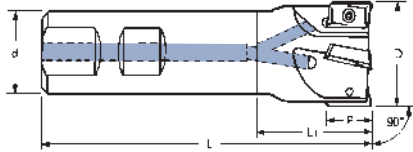

740 W
740 W ECO

	↔ (mm)													
	D	d	L	L1	p	β	z					KG		STOCK
740W W D10/1	10	16	80	28	10	11,0°	1	APHT APHX APKT 1003...	VT25	BT08		0,100		●
740W W D11/1	11	16	80	28	10	11,0°	1					0,100		●
740W W D12/1	12	16	80	28	10	9,0°	1					0,120		●
740W W D13/1	13	16	80	28	10	8,5°	1					0,120		●
740W W D14/1	14	16	80	28	10	8,0°	1					0,120		●
740W W D15/2	15	16	85	28	10	4,0°	2					0,120		●
740W W D15,7/2	15,7	16	85	28	10	3,5°	2					0,120		●
740W W D16/2	16	16	85	37	10	3,5°	2					0,130		●
740W D16/2 ECO	16	16	85	37	10	3,5°	2					0,130	--	●
740W W D17/2	17	16	85	37	10	3,0°	2					0,130		●
740W W D18/2	18	20	90	40	10	2,5°	2					0,170		●
740W W D19,5/3	19,5	20	90	40	10	1,5°	3					0,180		●
740W W D19,7/3	19,7	20	90	40	10	1,5°	3					0,180		●
740W W D20/3	20	20	90	40	10	1,5°	3					0,200		●
740W D20/3 ECO	20	20	90	40	10	1,5°	3					0,200	--	●
740W W D22/3	22	25	95	49	10	1,5°	3					0,220		●
740W W D24,7/4	24,7	25	95	49	10	0,9°	4					0,320		●
740W W D25/3	25	25	105	49	10	0,9°	3					0,320		●
740W W D25/4	25	25	105	49	10	0,9°	4					0,340		●
740W D25/4 ECO	25	25	105	49	10	0,9°	4					0,340	--	●
740W W D28/4	28	25	105	49	10	0,9°	4					0,340		●
740W W D30/4	30	25	105	49	10	0,8°	4					0,340		●
740W W D31,7/5	31,7	25	110	54	10	0,6°	5					0,360		●
740W W D32/5	32	25	110	54	10	0,6°	5					0,380		●

Serie lunga - Lange Ausführung - Long models


740W WL D10/1	10	16	150	50	10	11,0°	1	APHT APHX APKT 1003...	VT25	BT08		0,200		●
740W WL D12/1	12	16	150	50	10	9,0°	1					0,200		●
740W WL D16/2	16	16	150	100	10	3,5°	2					0,210		●
740W WL D18/2	18	16	150	50	10	2,5°	2					0,330		●
740W WL D20/3	20	20	150	100	10	1,5°	3					0,330		●
740W WL D25/4	25	20	150	100	10	0,9°	4					0,350		●
740W WL D32/5	32	25	150	55	10	0,6°	5					0,560		●



ART. 740 M






ART. 740 M ECO




740 M
740 M ECO

	↔ (mm)													
	D	d	H	p	β	z						KG		STOCK
740M W D40/6	40	16	40	10	—	6	APHT APHX APKT 1003...	VT25	BT08			0,270		●
740M D40/6 ECO	40	16	40	10	—	6						0,270	--	●
740M W D50/7	50	22	40	10	—	7						0,430		●
740M D50/7 ECO	50	22	40	10	—	7						0,430	--	●
740M W D63/8	63	22	40	10	—	8						0,610		●
740M W D80/11	80	27	50	10	—	11						1,220		●
740M W D100/12	100	32	50	10	—	12						1,980		●



FRESE A RICCIO _ SCHAFTSCHRUPPFRÄSER _ HELICAL END MILLS

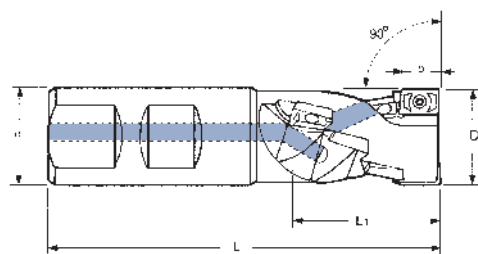
**900 W**

	D	d	L (mm)		L1	p	Fattore K	z				KG		STOCK	PRICELIST on getooling.com
900W W D20	20	20	87	28	10	1	4					0,200		●	
900W W D25	25	25	105	37	10	2	8					0,360		●	
900W W D32/2	32	32	115	46	10	2	10					0,600		●	
900W W D32/3	32	32	115	46	10	3	15					0,600		●	
900W W D40	40	32	130	55	10	3	18					0,780		●	

APHT
APHX
APKT
1003...

VT25

BT08


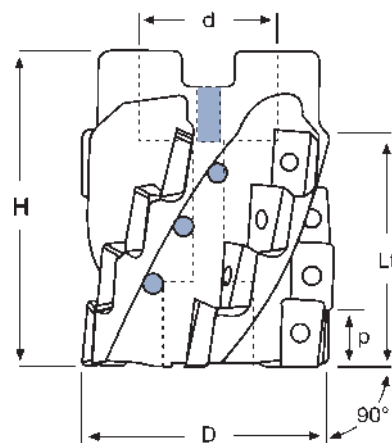
**900 M**

	D	d	H (mm)		Lt	p	Fattore K	z				KG		STOCK	PRICELIST on getooling.com
900M W D40	40	16	50	37	10	3	12					0,250		●	
900M W D50	50	22	60	46	10	3	15					0,510		●	
900M W D63	63	27	60	46	10	4	20					0,940		●	


APHT
APHX
APKT
1003...

VT25

BT08



FRESE PER SPALLAMENTI _ECKFRÄSER_ SHOULDER MILLING CUTTERS

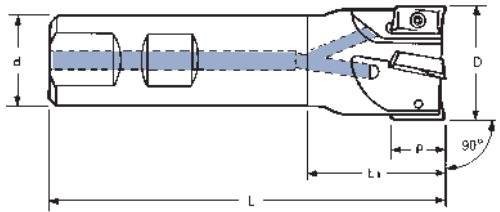

730 W	 (mm)												STOCK	PRICELIST on getooling.com
	D	d	L	L1	p	β	z							
730W W D25/2	25	25	100	44	17	3,5°	2	APHT APHX APKT 1604...	VT40	BT15	0,380			
730W W D32/3	32	32	110	50	17	2,0°	3				0,640			
730W W D40/4	40	32	115	45	17	1,5°	4				0,760			

Serie lunga - Lange Ausführung - Long models


730W WL D22/2	22	20	200	145	17	3,3°	2	APHT APHX APKT 1604...	VT40	BT15	0,440		●	
730W WL D25/2	25	25	200	140	17	3,5°	2				0,640		●	
730W WL D32/3	32	32	200	140	17	2,0°	3				1,120		●	
730W WL D40/4	40	32	200	60	17	1,5°	4				1,300		●	






ART. 730 M




ART. 730 M ECO

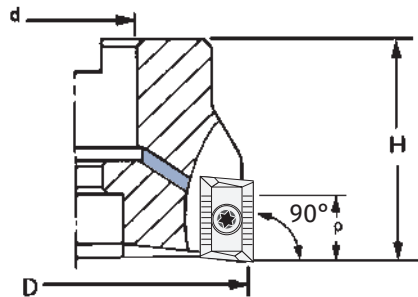


730 M 730 M ECO	(mm)											STOCK	PRICELIST on getooling.com
	D	d	H	p	β	z							
730M W D40/4	40	16	40	17	1,8°	4	APHT APHX APKT 1604...	VT40	BT15	0,210		●	
730M D40/4 ECO	40	16	40	17	1,8°	4				0,210	--	●	
730M W D50/5	50	22	40	17	1,0°	5				0,290		●	
730M D50/5 ECO	50	22	40	17	1,0°	5				0,290	--	●	
730M W D63/6	63	22	40	17	0,7°	6				0,530		●	
730M D63/6 ECO	63	22	40	17	0,7°	6				0,530	--	●	
730M W D80/7	80	27	50	17	0,6°	7				1,180		●	
730M W D100/8	100	32	50	17	0,4°	8				1,670		●	
730M W D125/9	125	40	63	17	0,3°	9				3,110		●	
730M D160/10	160	40	63	17	--	10				5,280	--	●	
730M D200/12	200	60	63	17	--	12				10,200	--	●	
730M D250/16	250	60	63	17	--	16				13,810	--	●	





FRESE A RICCIO _ SCHAFTSCHRUPPFRÄSER _ HELICAL END MILLS

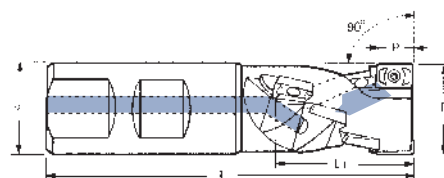


850 W			← (mm) →		Fattore K	z						STOCK	PRICELIST on getooling.com
	D	d	L	L1									
	850W W D25	25	25	105	29	17	1	2		0,320		●	
	850W W D32	32	32	115	44	17	2	6		0,520		●	
850W W D40	40	32	130	58	17	2	8			0,760		●	

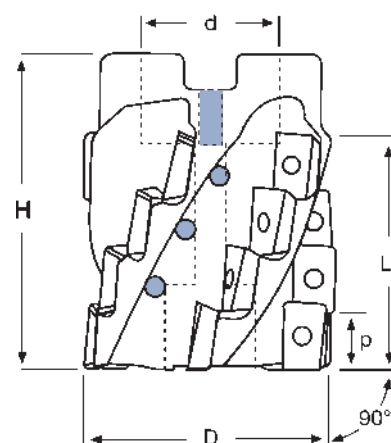


850 M			← (mm) →		Fattore K	z						STOCK	PRICELIST on getooling.com
	D	d	H	Lt									
	850M W D50	50	27	56	30	16	3	6		0,460		●	
	850M W D63	63	27	60	44	16	4	12		0,820		●	
850M W D80	80	32	60	44	16	5	15			1,380		●	
850M W D100	100	40	60	44	16	6	18			1,730		●	




FRESE PER SPIANATURA 75° _ PLANFRÄSER 75° _ FACE MILLING CUTTERS 75°

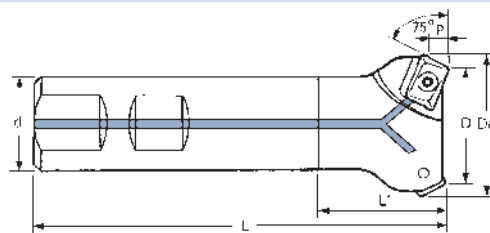**770 W**



	D	De	d	L	L1	p	z				KG		STOCK	PRICELIST on getooling.com
770W W D25/2	25	28,6	20	95	25	4	2	APHT APHX APKT 1003 ...	VT25	BT08	0,220		●	
770W W D32/3	32	35,6	25	95	25	4	3				0,320		●	
770W W D40/4	40	43,6	25	100	25	4	4				0,400		●	

**770 M**


	D	De	d	H	p	z				KG		STOCK	PRICELIST on getooling.com
770M W D50/5	50	54	22	40	6,5	5	APHT APHX APKT 1003 ...	VT25	BT08	0,360		●	
770M W D63/6	63	67	22	40	6,5	6				0,600		●	

**760 M**


	D	De	d	H	p	z				KG		STOCK	PRICELIST on getooling.com
760M W D50/3	50	54	16	40	6,5	3				0,310		●	
760M W D63/4	63	67	22	40	6,5	4	APHT APHX APKT 1604 ...	VT40	BT15	0,540		●	
760M W D80/5	80	84	27	50	6,5	5				1,150		●	
760M W D100/6	100	104	32	50	6,5	6				1,800		●	
760M W D125/7	125	129	40	63	6,5	7				3,140		●	




FRESE PER SPALLAMENTI _ECKFRÄSER_ SHOULDER MILLING CUTTERS

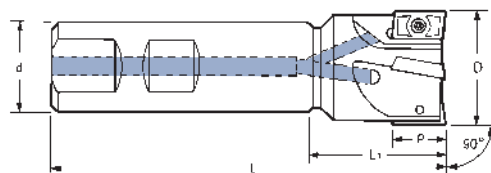**745 W**





	D	d	L (mm)		p	β	z				KG		STOCK	PRICELIST on getooling.com
745W W D20/3	20	20	100	30	9	4,0°	3	LNEX LNKX LNMX 1006...	VT30 745	BT09	0,220	●	●	
745W W D25/3	25	25	115	35	9	3,5°	3				0,400	●	●	
745W W D32/4	32	25	125	40	9	3,0°	4				0,520	●	●	
745W WL D20/3	20	20	150	50	9	4,0°	3				0,340	●	●	
745W WL D25/3	25	25	150	50	9	3,5°	3				0,520	●	●	
745W WL D32/4	32	32	200	60	9	3,0°	4				1,160	●	●	

**745 M**


	D	d	H	p	β	z				KG		STOCK	PRICELIST on getooling.com
745M W D40/5	40	16	40	9	2,0°	5	LNEX LNKX LNMX 1006...	VT30 745	BT09	0,260	●	●	
745M W D50/7	50	22	40	9	1,5°	7				0,380	●	●	
745M W D63/9	63	22	40	9	-	9				0,600	●	●	

**735 M**

	D	d	H	p	β	z				KG		STOCK	PRICELIST on getooling.com
735M W D50/5	50	22	40	14	2,0°	5	LNEX LNKX LNMX 1510...	VT40 735	BT15	0,320	●	●	
735M W D63/6	63	22	40	14	2,0°	6				0,520	●	●	
735M W D80/7	80	27	50	14	1,5°	7				1,120	●	●	
735M W D100/8	100	32	50	14	-	8				1,830	●	●	
735M W D125/10	125	40	63	14	-	10				3,520	●	●	
735M W D160/11	160	40	63	14	-	11				5,280	●	●	





FRESE PER SPALLAMENTI _ECKFRÄSER_ SHOULDER MILLING CUTTERS




830 W

	D	d	L (mm)		p	z				KG		STOCK	PRICELIST on getooling.com
			L	L1									
830W W D20/3	20	20	90	40	4	3	WNEU 0403 ...	VT25 830	BT08	0,350		●	
830W W D25/4	25	25	100	44	4	4				0,600		●	
830W W D32/5	32	32	110	50	4	5				1,150		●	
830W WL D20/3	20	20	150	40	4	3				0,500		●	
830W WL D25/4	25	25	170	50	4	4				0,750		●	
830W WL D32/5	32	32	195	70	4	5				2,100		●	




830 M

	D	d	H	p	z				KG		STOCK	PRICELIST on getooling.com
830M W D32/6	32	16	40	4	6	WNEU 0403 ...	VT25 830	BT08	0,140		●	
830M W D40/6	40	16	40	4	6				0,300		●	
830M W D50/8	50	22	40	4	8				0,500		●	
830M W D63/9	63	22	40	4	9				0,540		●	
830M W D80/11	80	27	50	4	11				1,060		●	




835 M

	D	d	H	p	z				KG		STOCK	PRICELIST on getooling.com
835M W D40/4	40	16	40	7	4	WNEU WNMU WNEX 0806 ...	VT40 835	BT15	0,230		●	
835M W D50/5	50	22	40	7	5				0,320		●	
835M W D63/6	63	22	40	7	6				0,480		●	
835M W D80/7	80	27	50	7	7				1,060		●	
835M W D100/8	100	32	50	7	8				1,680		●	
835M W D125/10	125	40	63	7	10				2,970		●	
835M W D160/11	160	40	63	7	11				4,400		●	
835M W D63F/7	63	22	40	7	7				0,480		●	
835M W D80F/9	80	27	50	7	9				1,070		●	
835M W D100F/10	100	32	50	7	10				1,650		●	
835M W D125F/11	125	40	63	7	11				2,970		●	
835M W D160F/12	160	40	63	7	12				4,350		●	





FRESE PER SPALLAMENTI _ECKFRÄSER_ SHOULDER MILLING CUTTERS

ALTO AVANZAMENTO
HOCHVORSCHUB
HIGH FEEDSULLA STESSA SEDE INSERTO POSSONO ESSERE MONTATE 2 TIPOLOGIE DI INSERTO.
AUF SELBEM PLATTENSITZ, KÖNNEN SIE 2 WENDEPLATTEN TYPOLOGIE MONTIEREN.
ON THE SAME INSERT SEAT, IT COULD BE USED 2 INSERT TYPE.

845 M

	D	d	H	p	z				KG		STOCK	PRICELIST on getooling.com
845M W D40/4	40	16	40	7	4	XNEX WNEU WNMU WNEX 0806...	VT40 835	BT15	0,230	●	●	
845M W D50/5	50	22	40	7	5				0,320	●	●	
845M W D63/6	63	22	40	7	6				0,480	●	●	
845M W D80/7	80	27	50	7	7				1,060	●	●	
845M W D100/8	100	32	50	7	8				1,680	●	●	

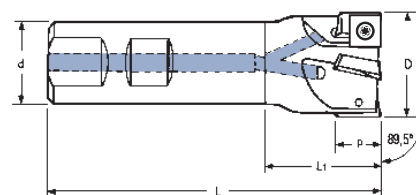

IN ESAURIMENTO

700 W


	D	d	L	L1	p	z			KG		STOCK	PRICELIST on getooling.com
700W W D10/1	10	16	80	24	6	1	SPGT SPMT 060304...	VT25	BT08	0,100	○	
700W W D12/1	12	16	80	24	6	1				0,120	○	
700W W D16/2	16	16	85	37	6	2				0,130	○	
700W W D20/3	20	20	90	40	6	3				0,200	○	
700W W D25/4	25	25	95	39	6	4				0,340	○	
700W W D32/5	32	25	95	30	6	5			0,380	○		

Serie lunga - Lange Ausführung - Long models

700W WL D16/2	16	16	150	101	6	2	SPGT SPMT 060304...	VT25	BT08	0,210	○	
700W WL D20/3	20	20	150	101	6	3				0,330	○	
700W WL D25/4	25	20	150	25	6	4				0,350	○	
700W WL D32/5	32	25	150	30	6	5				0,560	○	





IN ESAURIMENTO





700 M

	D	d	H	p	z				KG		STOCK	PRICELIST on getooling.com
700M W D40/6	40	16	40	6	6	SPGT SPMT 060304...	VT25	BT08	0,270	○	○	
700M W D50/7	50	22	40	6	7				0,430	○	○	
700M W D63/8	63	22	40	6	8				0,610	○	○	



FRESE PER SPALLAMENTI _ECKFRÄSER_ SHOULDER MILLING CUTTERS

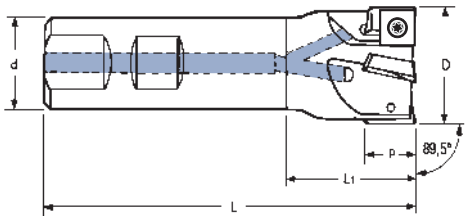


IN ESAURIMENTO



705 W	D	d	L (mm)		p	z				KG		STOCK	PRICELIST on getooling.com
705W W D25/2	25	25	100	44	9	2	SPGT SPMT 09T308...	VT35S	BT15	0,380		○	
705W W D32/3	32	32	110	50	9	3				0,640		○	
705W W D40/4	40	32	115	45	9	4				0,760		○	



IN ESAURIMENTO




705 M	D	d	H	p	z				KG		STOCK	PRICELIST on getooling.com
705M W D40/4	40	16	40	9	4	SPGT SPMT 09T308...	VT35S	BT15	0,210		○	
705M W D50/5	50	22	40	9	5				0,290		○	
705M W D63/6	63	22	40	9	6				0,530		○	
705M W D80/7	80	27	50	9	7				1,180		○	
705M W D100/8	100	32	50	9	8				1,670		○	




FRESE PER SPALLAMENTI _ECKFRÄSER _ SHOULDER MILLING CUTTERS





IN ESAURIMENTO




715 M	D	d	H	p	z				KG		STOCK	PRICELIST on getooling.com
715M W D50/5	50	22	40	12	5	SPGT SPMT 120408...	VT50	BT20	0,280	●	○	
715M W D63/6	63	22	40	12	6				0,600	●	○	
715M W D80/6	80	27	50	12	6				0,980	●	○	
715M W D100/8	100	32	50	12	8				1,540	●	○	
715M W D125/9	125	40	63	12	9				3,280	●	○	

FRESE PER SPIANATURA - SPALLAMENTI 90°
PLANFRÄSER - ECKFRÄSER 90° _ FACE - SHOULDER MILLING CUTTERS 90°

710 M	D	d	H	p	z				KG		STOCK	PRICELIST on getooling.com
710M W D40/4	40	16	45	10,5	4	SDMT 1205...	VT40 710	BT15	0,230	●	●	
710M W D50/5	50	22	40	10,5	5				0,280	●	●	
710M W D63/6	63	22	40	10,5	6				0,600	●	●	
710M W D80/6	80	27	50	10,5	6				0,980	●	●	
710M W D100/8	100	32	50	10,5	8				1,540	●	●	
710M W D125/9	125	40	63	10,5	9				3,280	●	●	







FRESE PER SPIANATURA 45° _ PLANFRÄSER 45° _ FACE MILLING CUTTERS 45°

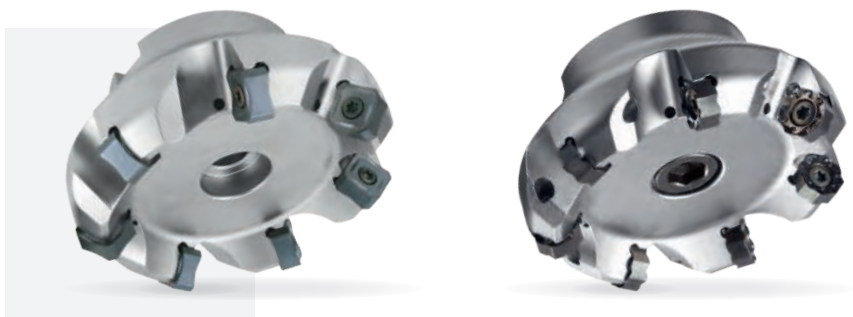






**SULLA STESSA SEDE INSERTO POSSONO ESSERE MONTATE
2 TIPOLOGIE DI INSERTO: 8 TAGLIANTI E 16 TAGLIANTI.**

**AUF SELBEM PLATTENSITZ, KÖNNEN SIE 2 WENDEPLATTEN
TYPOLOGIE MONTIEREN: 8 SCHNEIDEN UND 16 SCHNEIDEN**

**ON THE SAME INSERT SEAT, IT COULD BE USED 2 INSERT TYPE:
8 CUTTING EDGE AND 16 CUTTING EDGE.**

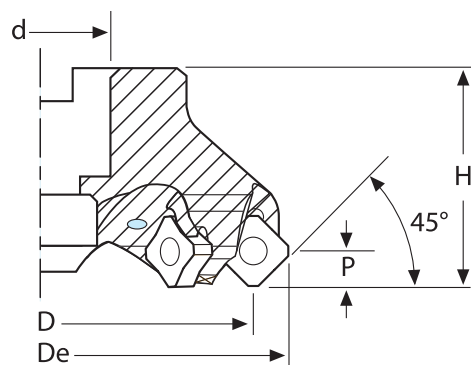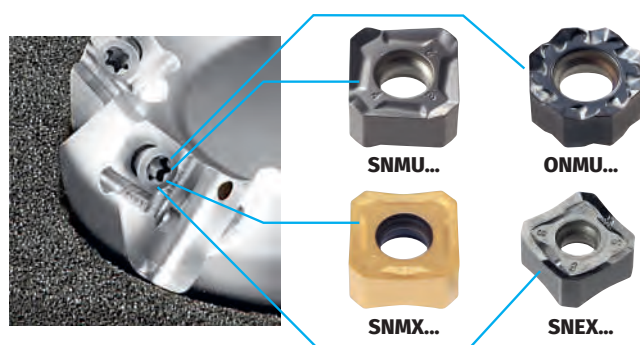
[illegible]

FRESE PER SPIANATURA 45° _ PLANFRÄSER 45° _ FACE MILLING CUTTERS 45°

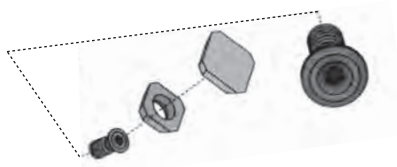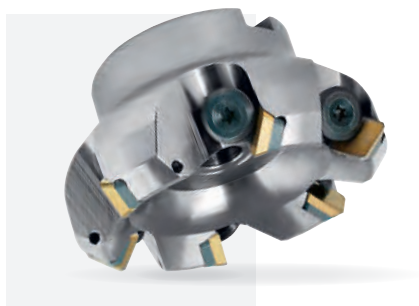



550 M	D	De	d	d1	c	e	a	b	H	p	z		KG		STOCK	PRICELIST on getooling.com
550M W D50-12/4	50	63	22	-	17	21	10,4	6,3	48	6	4		0,600		●	
550M W D63-12/5	63	76	22	-	19	21	10,4	6,3	40	6	5		0,690		●	
550M W D80-12/6	80	93	27	-	38	24	12,4	7	50	6	6		1,370		●	
550M W D100-12/6	100	113	32	-	45	26	14,4	8	50	6	6		2,000		●	
550M W D125-12/7	125	138	40	-	56	32	16,4	9	63	6	7		3,900		●	
550M W D160-12/7 *	160	173	40	66,7	86	32	16,4	9	63	6	7		5,900		●	
550M W D200-12/10 *	200	213	60	101,7	129	32	25,7	14	63	6	10		15,000		●	
550M W D250-12/13 *	250	263	60	101,7	178	32	25,7	14	63	6	13		15,000		●	

550 M-L	D	De	d	d1	c	e	a	b	H	p	z		KG		STOCK	PRICELIST on getooling.com
550M W D50-12L/4	50	63	22	-	17	21	10,4	6,3	48	6	4		0,600		●	
550M W D63-12L/5	63	76	22	-	19	21	10,4	6,3	40	6	5		0,690		●	
550M W D80-12L/6	80	93	27	-	38	24	12,4	7	50	6	6		1,370		●	
550M W D100-12L/6	100	113	32	-	45	26	14,4	8	50	6	6		2,000		●	
550M W D125-12L/7	125	138	40	-	56	32	16,4	9	63	6	7		3,900		○	

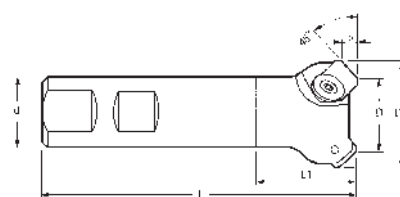


550 W	D	De	d	L	L1	p	z		KG		STOCK	PRICELIST on getooling.com
550W W D40-12/4	40	53	32	115	45	6	4		0,840		○	

RICAMBI ERSATZTEILE SPAREPARTS	Sottopiacchetta Support	Vite di bloccaggio Insert locking screw	Vite sottopiacchetta Screw support	Chiave Key	Chiave Key
	AKE12,4	CVB55 (550M) (550W)	CVB55L (550M-L)	VF4	BT25 TORX PLUS
					BT08



FRESE PER SPIANATURA 45° _ PLANFRÄSER 45° _ FACE MILLING CUTTERS 45°

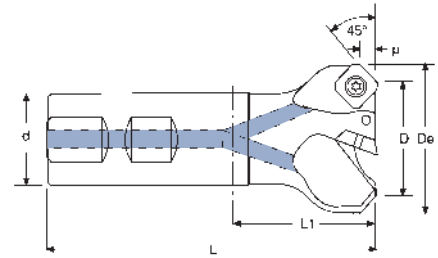
**600 W**

	D	De	d	L	L1	p	z				KG		STOCK	PRICELIST on getooling.com
600W W D25/2	25	38	25	100	44	6	2	SEHT SEHX SEKT 1204...	VT50	BT20	0,370		●	
600W W D32/3	32	45	25	110	54	6	3				0,420		●	
600W W D40/4	40	53	32	115	55	6	4				0,780		●	



ART. 600 M




ART. 600 M ECO

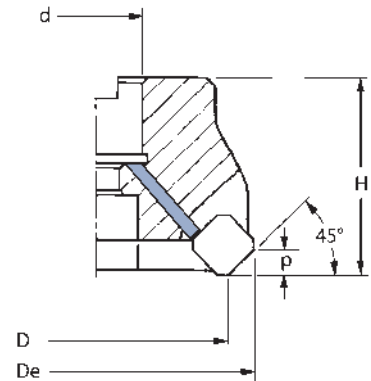**600 M
600 M ECO**


	D	De	d	H	p	z				KG		STOCK	PRICELIST on getooling.com
600M W D40-12/3	40	53	16	40	6	3				0,270		●	
600M W D50-12/4	50	63	22	48	6	4				0,480		●	
600M D50-12/4 ECO	50	63	22	48	6	4				0,480	--	●	
600M W D63-12/5	63	76	22	48	6	5				0,760		●	
600M D63-12/5 ECO	63	76	22	48	6	5				0,760	--	●	
600M W D80-12/6	80	93	27	50	6	6				1,270		●	
600M D80-12/6 ECO	80	93	27	50	6	6				1,270	--	●	
600M W D100-12/6	100	113	32	50	6	6				1,790		●	
600M D100-12/6 ECO	100	113	32	50	6	6				1,790	--	●	
600M W D125-12/7	125	138	40	63	6	7				3,470		●	
600M W D160-12/8	160	173	40	63	6	8				5,280		●	
600M D200-12/12	200	213	60	63	6	12				7,800	--	●	
600M D250-12/16	250	263	60	63	6	16				11,100	--	●	
600M W D40-12F/4	40	53	16	40	6	4				0,270		●	
600M W D50-12F/5	50	63	22	48	6	5				0,480		●	
600M W D63-12F/6	63	76	22	48	6	6				0,760		●	
600M W D80-12F/7	80	93	27	50	6	7				1,270		●	
600M W D100-12F/8	100	113	32	50	6	8				1,790		●	
600M W D125-12F/9	125	138	40	63	6	9				3,470		●	
600M W D160-12F/10	160	173	40	63	6	10				5,280		●	





FRESE PER SPIANATURA 45° _ PLANFRÄSER 45° _ FACE MILLING CUTTERS 45°

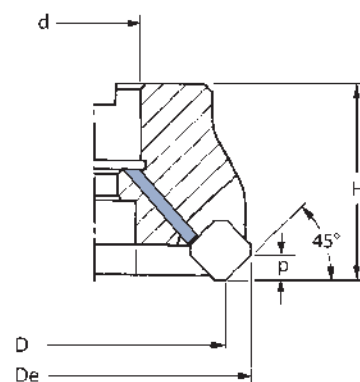


670 M	D	De	d (mm)	H	p	z				KG		STOCK	PRICELIST on getooling.com
670M W D50-12/4	50	63	22	48	6	4	SDHT SDKT 1204...	VT45	BT20	0,520	●	○	
670M W D63-12/5	63	76	22	48	6	5				0,800	●	○	
670M W D80-12/6	80	93	27	50	6	6				1,300	●	○	
670M W D100-12/6	100	113	32	50	6	6				1,770	●	○	
670M W D125-12/7	125	138	40	63	6	7				3,700	●	○	
670M W D160-12/8	160	173	40	63	6	8				5,280	●	○	
670M D200-12/12	200	213	60	63	6	12				14,000	--	○	
670M D250-12/16	250	263	60	63	6	16				14,000	--	○	

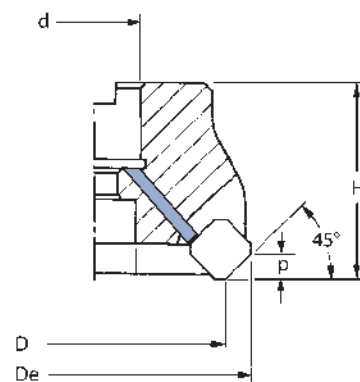

680 M	D	De	d (mm)	H	p	z				KG		STOCK	PRICELIST on getooling.com
680M W D50-13/4	50	63	22	40	6	4	SEHT SEHX 13T3...	VT3511	BT15	0,460	●	●	
680M W D63-13/5	63	76	22	40	6	5				0,610	●	●	
680M W D80-13/6	80	93	27	50	6	6				1,300	●	●	
680M W D100-13/7	100	113	32	50	6	7				1,670	●	●	
680M W D125-13/8	125	138	40	63	6	8				3,370	●	●	
680M D160-13/10	160	173	40	63	6	10				4,500	--	●	
680M D200-13/12	200	213	60	63	6	12				14,000	--	○	
680M D250-13/16	250	263	60	63	6	16				14,000	--	○	
680M W D50-13F/5	50	63	22	40	6	5				0,460	●	●	
680M W D63-13F/6	63	76	22	40	6	6				0,610	●	●	
680M W D80-13F/8	80	93	27	50	6	8				1,300	●	●	
680M W D100-13F/10	100	113	32	50	6	10				1,670	●	●	
680M W D125-13F/12	125	138	40	63	6	12				3,370	●	●	
680M D160-13F/16	160	173	40	63	6	16				4,500	--	●	



FRESE PER SCANALATURE E TAGLIO _SCHEIBENFRÄSER_ GROOVING AND CUT OFF MILLS

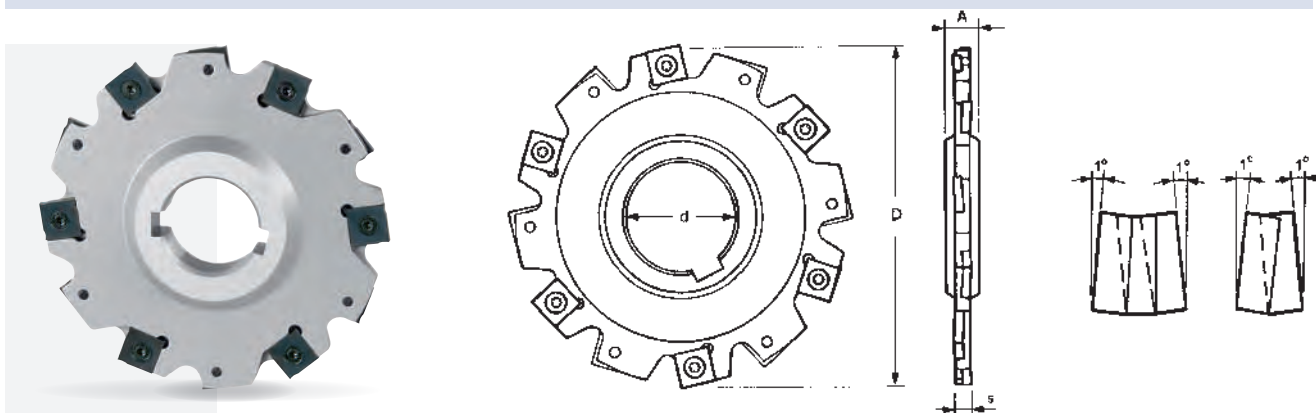


ANGOLO ASSIALE -3°
ANGOLO RADIALE -12°

AXIAL WINKEL -3°
RADIAL WINKEL -12°

AXIAL RAKE -3°
RADIAL RAKE -12°

610	D	d	s	A	B	Z	Fattore K	Max prof. di taglio				KG		STOCK	PRICELIST on getooling.com
610 63 04	63	22	4	8	34	8	4	14	SNHX 1102T	VTX3503	BT09	0,070	--	○	
05	63	22	5	8	34	8	4	14	SNHX 1103T	VTX3504	BT09	0,080	--	○	
06	63	22	6	8	34	6	3	14	SNHX 1203T	VTX405	BT15	0,080	--	○	
610 80 04	80	22	4	8	34	10	5	22	SNHX 1102T	VTX3503	BT09	0,200	--	○	
05	80	22	5	8	34	10	5	22	SNHX 1103T	VTX3504	BT09	0,220	--	○	
06	80	22	6	8	34	8	4	22	SNHX 1203T	VTX405	BT15	0,240	--	○	
610 100 04	100	27	4	12	45	12	6	25	SNHX 1102T	VTX3503	BT09	0,240	--	○	
05	100	27	5	12	45	12	6	25	SNHX 1103T	VTX3504	BT09	0,330	--	○	
06	100	27	6	12	45	10	5	25	SNHX 1203T	VTX405	BT15	0,360	--	○	
10	100	27	10	12	45	10	5	25	SNHX 1205T	VTX408	BT15	0,470	--	○	
610 125 04	125	40	4	12	58	12	6	31	SNHX 1102T	VTX3503	BT09	0,410	--	○	
05	125	40	5	12	58	12	6	31	SNHX 1103T	VTX3504	BT09	0,450	--	○	
06	125	40	6	12	58	12	6	31	SNHX 1203T	VTX405	BT15	0,500	--	○	
10	125	40	10	12	58	12	6	31	SNHX 1205T	VTX408	BT15	0,670	--	○	
610 160 04	160	40	4	12	68	18	9	44	SNHX 1102T	VTX3503	BT09	0,660	--	○	
05	160	40	5	12	68	18	9	44	SNHX 1103T	VTX3504	BT09	0,740	--	○	
06	160	40	6	12	68	16	8	44	SNHX 1203T	VTX405	BT15	0,840	--	○	
10	160	40	10	12	68	16	8	44	SNHX 1205T	VTX408	BT15	1,130	--	○	
14	160	40	14	14	68	15	5	44	SNHX 1205T	VTX408	BT15	1,600	--	○	
610 200 04	200	50	4	12	72	18	9	62	SNHX 1102T	VTX3503	BT09	0,860	--	○	
05	200	50	5	12	72	18	9	62	SNHX 1103T	VTX3504	BT09	0,990	--	○	
06	200	50	6	12	72	18	9	62	SNHX 1203T	VTX405	BT15	1,200	--	○	
10	200	50	10	12	72	18	9	62	SNHX 1205T	VTX408	BT15	1,800	--	○	
14	200	50	14	14	72	18	6	62	SNHX 1205T	VTX408	BT15	2,500	--	○	
610 250 10	250	50	10	12	72	24	12	87	SNHX 1205T	VTX408	BT15	2,800	--	○	



ae/D	0,5-1 50 - 100%	0,2 20%	0,1 10%	0,05 5%
Vc	Vc (min)-----Vc (max) R-----M-----F			

ae/D	0,3 30%	0,2 20%	0,1 10%	0,05 5%	0,02 2%
Kae	1,2	1,5	2,1	3	4,8

Ve = m/min VELOCITÀ DI TAGLIO - CUTTING SPEED

n = giri/min (min-1) NUMERO DI GIRI - NUMBER OF REVOLUTIONS

fz = mm AVANZAMENTO AL DENTE - TOOTH FEED

fn = mm AVANZAMENTO AL GIRO - FEED REVOLUTION



Vf = mm/min VELOCITÀ DI AVANZAMENTO - FEED SPEED

Kae = FATTORE DICORREZIONE - CORRECTION FACTOR


F = FINITURA, LAV. LEGGERA - FINISHING, LIGHT MACHINING

M = LAV. MEDIA, GENERICA - MEDIUM MACHINING, GENERIC




R = SGROSSATURA, LAV. PESANTE - ROUGHING, HEAVY MACHINING




FRESE PER SCANALATURE E TAGLIO _SCHEIBENFRÄSER_ GROOVING AND CUT OFF MILLS

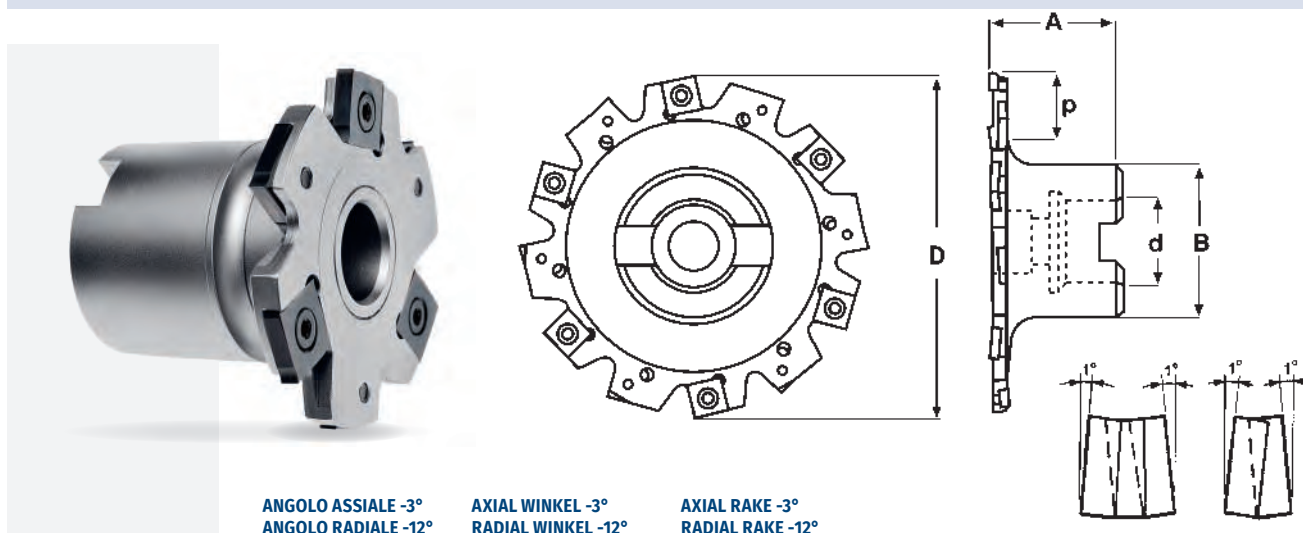

610 M	D	d	s	A	B	Z	Fattore K	Max prof. di taglio				KG		STOCK	PRICELIST on getooling.com
610M 50 04	50	16	4	50	32	4	2	8,5	SNHX 1102T	VTX3503	BT09	0,300	--	○	
05	50	16	5	50	32	4	2	8,5	SNHX 1103T	VTX3504	BT09	0,300	--	○	
06	50	16	6	50	32	4	2	8,5	SNHX 1203T	VTX405	BT15	0,300	--	○	
10	50	16	10	50	32	4	2	8,5	SNHX 1205T	VTX408	BT15	0,300	--	○	
610M 63 04	63	22	4	50	40	8	4	10,5	SNHX 1102T	VTX3503	BT09	0,390	--	○	
05	63	22	5	50	40	8	4	10,5	SNHX 1103T	VTX3504	BT09	0,400	--	○	
06	63	22	6	50	40	6	3	10,5	SNHX 1203T	VTX405	BT15	0,400	--	○	
10	63	22	10	50	40	6	3	10,5	SNHX 1205T	VTX408	BT15	0,400	--	○	
14	63	22	14	50	40	6	2	10,5	SNHX 1205T	VTX408	BT15	0,500	--	○	
610M 80 04	80	22	4	50	40	10	5	20	SNHX 1102T	VTX3503	BT09	0,430	--	○	
05	80	22	5	50	40	10	5	20	SNHX 1103T	VTX3504	BT09	0,500	--	○	
06	80	22	6	50	40	8	4	20	SNHX 1203T	VTX405	BT15	0,500	--	○	
10	80	22	10	50	40	8	4	20	SNHX 1205T	VTX408	BT15	0,600	--	○	
14	80	22	14	50	40	6	2	20	SNHX 1205T	VTX408	BT15	0,650	--	○	
610M 100 04	100	27	4	50	48	12	6	24,2	SNHX 1102T	VTX3503	BT09	0,690	--	○	
05	100	27	5	50	48	12	6	24,2	SNHX 1103T	VTX3504	BT09	0,730	--	○	
06	100	27	6	50	48	10	5	24,2	SNHX 1203T	VTX405	BT15	0,740	--	○	
10	100	27	10	50	48	10	5	24,2	SNHX 1205T	VTX408	BT15	0,840	--	○	
14	100	27	14	50	48	9	3	24,2	SNHX 1205T	VTX408	BT15	1,000	--	○	
610M 125 04	125	40	4	50	70	12	6	23,7	SNHX 1102T	VTX3503	BT09	1,000	--	○	
05	125	40	5	50	70	12	6	23,7	SNHX 1103T	VTX3504	BT09	1,100	--	○	
06	125	40	6	50	70	12	6	23,7	SNHX 1203T	VTX405	BT15	1,100	--	○	
10	125	40	10	50	70	12	6	23,7	SNHX 1205T	VTX408	BT15	1,210	--	○	
14	125	40	14	50	70	12	4	23,7	SNHX 1205T	VTX408	BT15	1,450	--	○	
610M 160 04	160	40	4	50	70	16	8	41,2	SNHX 1102T	VTX3503	BT09	1,240	--	○	
05	160	40	5	50	70	16	8	41,2	SNHX 1103T	VTX3504	BT09	1,310	--	○	
06	160	40	6	50	70	16	8	41,2	SNHX 1203T	VTX405	BT15	1,450	--	○	
10	160	40	10	50	70	16	8	41,2	SNHX 1205T	VTX408	BT15	1,720	--	○	
14	160	40	14	50	70	15	5	41,2	SNHX 1205T	VTX408	BT15	2,140	--	○	



FRESE PER SCANALATURE E TAGLIO _ SCHEIBENFRÄSER _ GROOVING AND CUT OFF MILLS


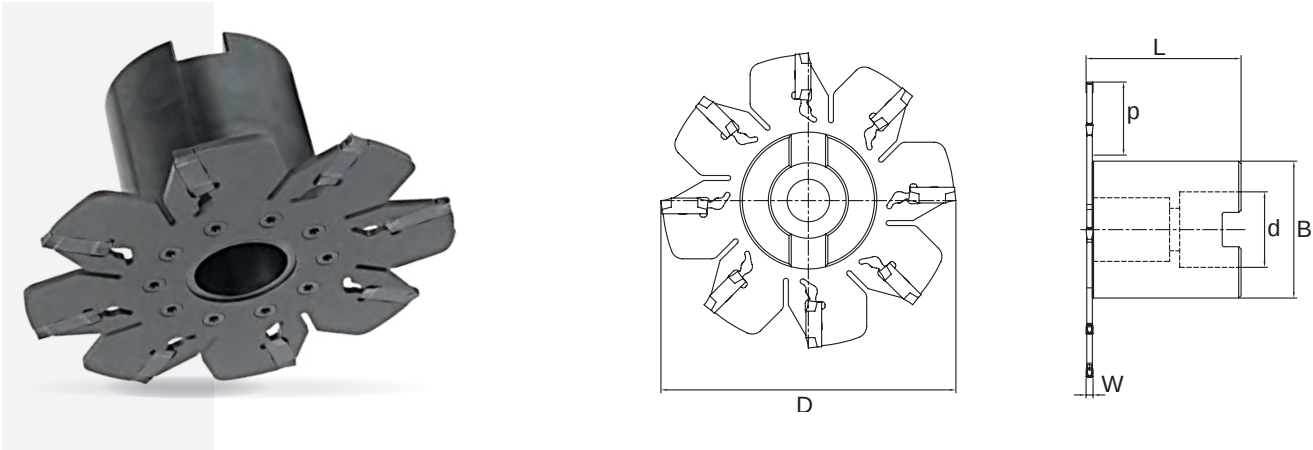


GEDM	Ø D		L		↔ (mm)		W		p		Ø B		d		z			KG		STOCK	PRICELIST on getooling.com
GEDM 08020 Z4 ST *	80	39,9	2,0	25	29	M16	4	GELCG..192002	0,250	--	●	GELCG..193002	0,700	--	●	GELCG..234002	1,350	--	●		
GEDM 10020 Z6 SA	100	51,9	2,0	28	40	22	6		1,250	--	●		2,500	--	●		2,650	--	●		
GEDM 12520 Z8 SA	125	51,9	2,0	36	48	27	8		0,250	--	●		1,300	--	●						
GEDM 16020 Z10 SA	160	64,9	2,0	39	80	40	10		0,700	--	●		2,550	--	●						
GEDM 08030 Z4 ST *	80	40,7	3,0	25	29	M16	4	GELCG..193002	0,250	--	●	GELCG..234002	0,700	--	●		1,350	--	●		
GEDM 10030 Z6 SA	100	52,7	3,0	28	40	22	6		1,250	--	●		2,500	--	●		2,650	--	●		
GEDM 12530 Z8 SA	125	52,7	3,0	36	48	27	8		0,250	--	●		1,300	--	●						
GEDM 16030 Z10 SA	160	65,7	3,0	39	80	40	10		0,700	--	●		2,550	--	●						
GEDM 12540 Z6 SA	125	53,5	4,0	37,5	48	27	6	GELCG..234002	1,350	--	●		2,650	--	●						
GEDM 16040 Z8 SA	160	66,5	4,0	39	80	40	8														

* Gambo filettato _ Schaftausführung Gewinde _ Threaded shank

INSERTI _ WECHSELPLATTEN _ INSERTS

Inserto unico per tutto il programma _ Ein Wendeplatte fuer gesamtes Programm _ One insert for whole programme

CODICE ORDINE Bestell-Nr. Order No.	FIGURA Form Figure	↔ (mm)		DENOMINAZIONE Bezeichnung Designation	NON RIVESTITI Unbeschichte Uncoated				RIVESTITI Beschichtet Coated						CERMET	
		W	r		TAGLIANTI Schneide Cutting edge	K15	P25	P40	P200	P300	K300	K400	TIN PVD	TIALN PVD	X99	X55
 GELCGS		2,0	0,2	1	GELCGS 192002	●				●	●					
		3,0	0,2	1	GELCGS 193002	●				●	●					
		4,0	0,2	1	GELCGS 234002	●				●	●					
 GELCGD		2,0	0,2	2	GELCGD 192002	●				●	●					
		3,0	0,2	2	GELCGD 193002	●				●	●					
		4,0	0,2	2	GELCGD 234002	●				●	●					

GE KEY


Chiave _ Schlüssel _ Spanner

PRICELIST on
getooling.com




Chiave non inclusa. Da ordinare separatamente.
Schlüssel nicht eingeschlossen. Separat bestellen.
Key not included. To be ordered separately.


MINIMILL

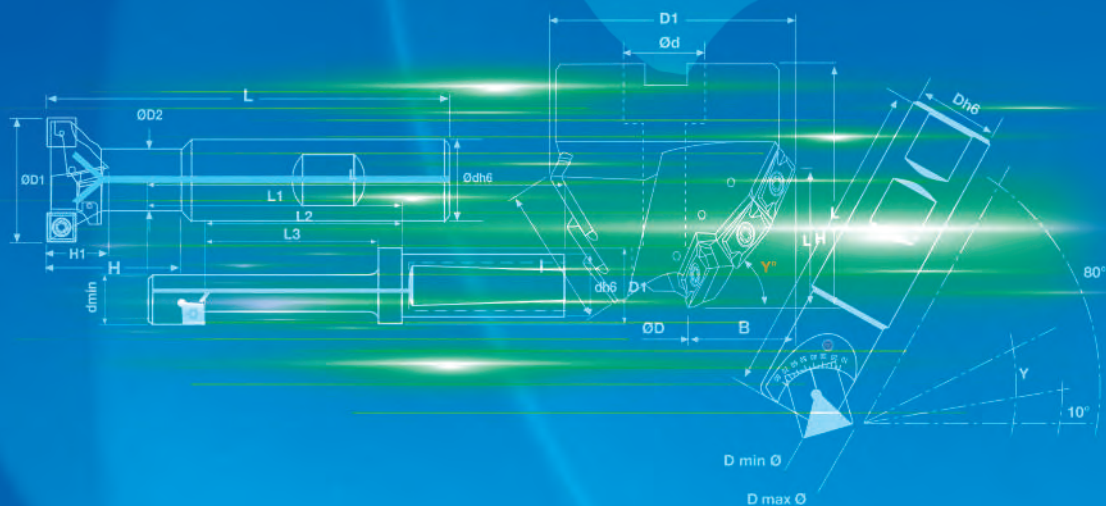


FRESE PER SMUSSI, SCANALATURE A V E CENTRARE 45°/30° FAS-UND ZENTRIERFRÄSER 45°/30° _ CENTER DRILLING, CHAMFERING AND V GROOVING 45°/30°

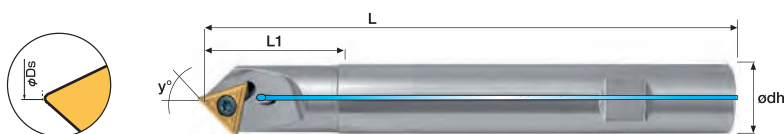



311 W	Ødh6	DS	L (mm)		Y°	Z	D _{min}	D _{max}				KG		STOCK	PRICELIST on getooling.com
311.020 WW	20	0,4 / 0,8	115	40	45°	1	0,4	20	TCMX			0,240		●	
311.020 WWL	20	0,4 / 0,8	150	60	45°	1	0,4	20	16T3ZR...	VT40	BT15	0,320		●	
311.020 WWXL	20	0,4 / 0,8	200	80	45°	1	0,4	20	16T308ZR...			0,430		●	

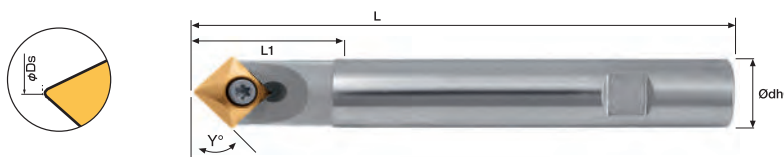

160 W	Ødh6	DS	L (mm)		Y°	Z	D _{min}	D _{max}				KG		STOCK	PRICELIST on getooling.com
160.45 W	16	0,8	120	40	45°	1	0,8	17	SEEX			0,190	--	●	
160.30 W	16	0,8	120	40	30°	1	0,8	21	12T4	VT4010	BT15	0,200	--	●	


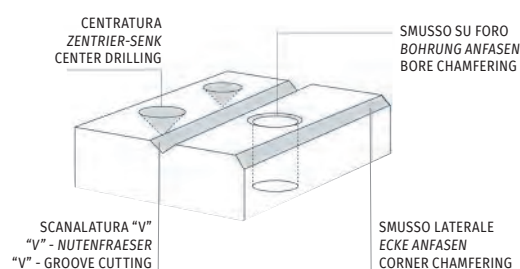


FRESA PER SBAVATURA 45° _ FASFRÄSER 45° _ CHAMFERING MILLING CUTTER 45°

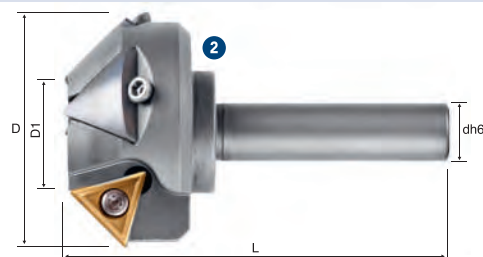
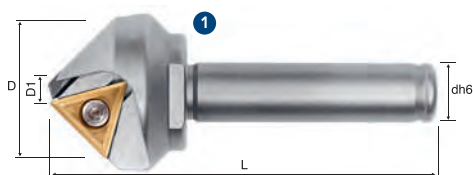


7745	Fig.	ØD	ØD1	L (mm)		Ødh6	y°	Z				KG		STOCK	PRICELIST on getooling.com
7745VT16-C12-0525	1	25	5	78	12	45°	1	TCGX				0,140	--	●	
7745VT16-C12-2545	2	45	25	78	12	45°	1	163504...	VT40	BT15		0,310	--	●	

FRESE PER SMUSSI E SVASATURE 30°, 45° E 60°
FRÄSER ZUM FASEN 30°, 45° E 60° _ CHAMFERING MILLING CUTTER 30°, 45° AND 60°

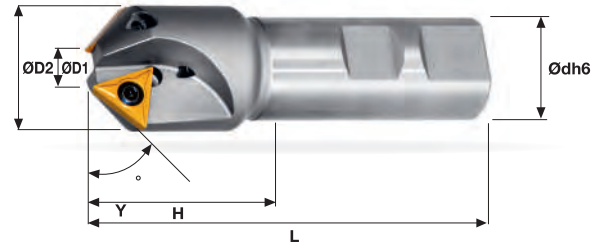

300 W	(mm)										KG		STOCK	PRICELIST on getooling.com
	ØD1	ØD2	L	H	Ødh6	Y°	Z							
300.016 WW	1,2	16	70	20	12	45°	1	TCMT 1102...	VT25B	BT08	0,060		●	
300.021 WW	6,2	21	90	35	20	45°	2				0,180		●	
300.032 WW	10,4	32,5	100	42	25	45°	2	TCMT 16T3...	VT40	BT15	0,380		●	
310.016 WW	5,4	16	70	20	12	60°	1	TCMT 1102...	VT25B	BT08	0,060		●	
310.027 WW	15,8	26	90	35	20	60°	2				0,180		●	
310.032 WW	20	35	100	39	25	60°	2	TCMT 16T3...	VT40	BT15	0,380		●	
315.032 WW	6	32	100	38	25	30°	2	TCMT 16T3...	VT40	BT15	0,380		●	

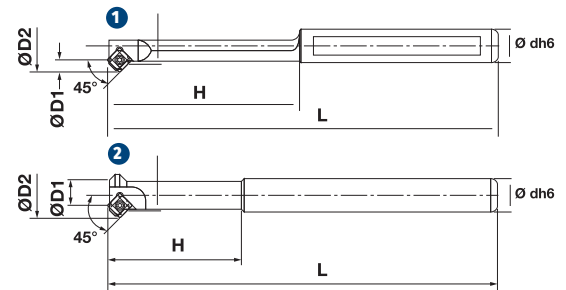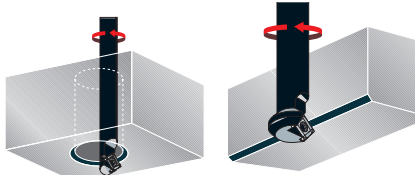

320 W	Fig.	(mm)									KG		STOCK	PRICELIST on getooling.com
		ØD1	ØD2	L	H	Ødh6	Z							
320.004 WW	1	4	12	80	28	12	1	SCMT 060204	VT25B	BT08	0,060		●	
320.011 WW	2	11	20	80	32	12	2				0,070		●	
320.012 WW	1	12	23,7	100	37	20	1				0,190		●	
320.016 WW	2	16	28,8	100	32	16	2	SCMT 09T308	VT40	BT15	0,150		●	
320.025 WW	2	30	42,3	100	32	20	3				0,270		●	
Serie lunga - Lange Ausführung - Long models														
320.012 WWL	1	12	23,7	200	37	20	1				0,420		●	
320.016 WWL	2	16	28,8	200	32	16	2	SCMT 09T308	VT40	BT15	0,300		●	
320.025 WWL	2	30	42,3	200	32	20	3				0,480		●	

321 W	Fig.	(mm)									KG		STOCK	PRICELIST on getooling.com
		ØD1	ØD2	L	H	Ødh6	Z							
321.004 WW	1	4	12	80	28	12	1	SPGT SPMT 060304	VT25	BT08	0,060		○	
321.011 WW	2	11	20	80	32	12	2				0,070		○	
321.012 WW	1	12	23,7	100	37	20	1				0,190		○	
321.016 WW	2	16	28,8	100	32	16	2	SPGT SPMT 09T308	VT35S	BT15	0,150		○	
321.025 WW	2	30	42,3	100	32	20	3				0,270		○	


FRESE PER SMUSSI E SVASATURE REGISTRABILE DA 10° A 80° _ FASENFRÄSER, WINKELVERSTELLBAR VON 10° BIS 80° _ MILLING CUTTERS FOR CHAMFERING-FLARING 10° TO 80°



Con cassetta TCMT 16T3...
Mit Kasette TCMT 16T3...
With pocket TCMT 16T3...



Con cassetta SCMT 1204...
Mit Kasette SCMT 1204...
With pocket SCMT 1204...


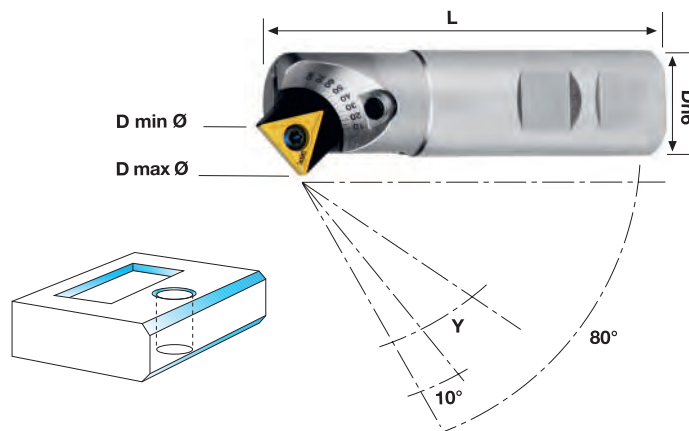


INCLUDE 2 CASSETTE T16 NEW + S12 NEW
INKLUSIVE 2 KASSETTEN T16 NEW + S12 NEW
INCLUDING 2 POCKETS T16 NEW + S12 NEW



340 W NEW	D h6	L	Y	Fig. 1		Fig. 2		E	KG	F	STOCK	PRICELIST on getooling.com
				Dmin. Ø	Dmax. Ø	Dmin. Ø	Dmax. Ø					
340.020 W NEW	20	95	"	"	"	"	"	"	0,320	--	●	
			10°	5	32	7,5	30	2,7				
			20°	6	33	10	32	3,6				
			30°	7	34	13	32,5	4,3				
			40°	10	33	16,5	33,5	4,5				
340.025 W NEW	25	95	45°	11	33	17,5	33,5	4,6	0,330	--	●	
			50°	13	32	19	33,5	4,6				
			60°	16	31	22	33,5	4,3				
			70°	19	29	24,5	33,5	3,8				
			80°	23	27	27	31	3				
340.025 WL NEW	25	145	"	"	"	"	"	"	0,530	--	●	
340.025 WXL NEW	25	195	"	"	"	"	"	"	0,720	--	●	

	Cassetta Pocket	Inserto Insert	Vite inserto Insert screw	Vite cassetta Pocket screw	Chiave Key
 Fig. 1 Con cassetta TCMT 16T3... Mit Kasette TCMT 16T3... With pocket TCMT 16T3...	 T16NEW	 TCMT16T3...	 VT40	 M6-16	 BT15
 Fig. 2 Con cassetta SCMT 1204... Mit Kasette SCMT 1204... With pocket SCMT 1204...	 S12NEW	 SCMT1204...	 VT40S	 M6-16	 BT20

FRESE PER CAVE A T _ FRÄSER FÜR T-NUTEN _ T SLOT MILLING CUTTER

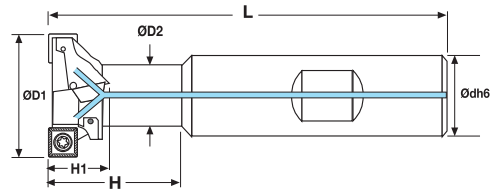

250 W	ØD1	ØD2	L	H	H1	Ødh6	K	Z						STOCK	PRICELIST on getooling.com
250.021 WW	21	11	76	26	9	16	1	2	SPGT SPMT 060304	VT25	BT08	0,100			
250.025 WW	25	13	82	31	11	16	2	4				0,100			
250.032 WW	32	17	88	38	14	20	2	4	SPGT SPMT 09T308	VT35S	BT15	0,200			
250.040 WW	40	21	108	50	17	25	2	4				0,400			
250.050 WW	50	27	120	56	22	32	2	4	SPGT SPMT 120408	VT50	BT20	0,670			

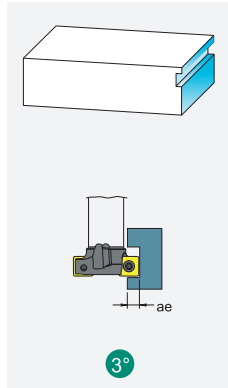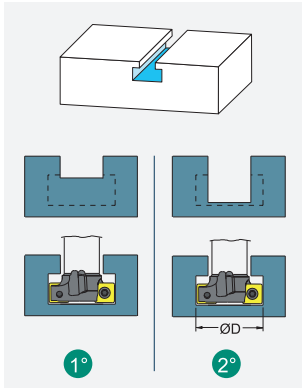



	1°	2°	3°		
ae/D	1 100%	0,5 50%	0,2 20%	0,1 10%	0,05 5%
Kae	1	1	1,5	2,1	3

ae/D	0,5-1 50-100%	0,2 20%	0,1 10%	0,05 5%
Vc	Vc (min)-----Vc(max)			
	R-----M-----F			

NOTE
Per cave a "T" secondo norme DIN 650-UNI 4788-ISO 299
Für "T" Nuten nach DIN 650-uni 4788-ISO 299 Normen
For "T" slot cutters according to DIN 650-UNI4788-ISO 299 norms



Ve m/min VELOCITÀ DI TAGLIO - CUTTING SPEED
n giri/min (min-1) NUMERO DI GIRI - NUMBER OF REVOLUTIONS
fz mm AVANZAMENTO AL DENTE - TOOTH FEED
fn mm AVANZAMENTO AL GIRO - FEED I REVOLUTION
Vf mm/min VELOCITÀ DI AVANZAMENTO - FEED SPEED
Kae FATTORE DI CORREZIONE - CORRECTION FACTOR
F FINITURA, LAV. LEGGERA - FINISHING, LIGHT MACHINING
M LAV. MEDIA, GENERICA - MEDIUM MACHINING, GENERIC
R SGROSSATURA, LAV. PESANTE - ROUGHING, HEAVY MACHINING
Z Numero di eliche / Schraubenanzahl / Number of flutes
K Fattore d'avanzamento / Vorschubfaktor / Factor of feed

FRESE FORANTI _ BOHRNUTFRÄSER _ DRILLING ENDMILL

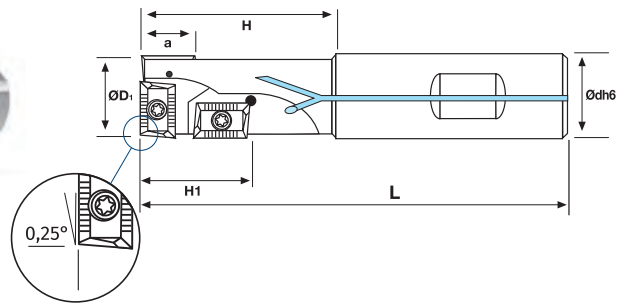



720 W	ØD1	Ødh6	L	H	H1	a	Z							PRICELIST on getooling.com
720W W D20	20	20	90	35	17	9	3	APKT 1003...	VT25	BT08	0,200			
720W W D25	25	25	110	50	19	9	3				0,360			
720W W D32	32	32	130	50	30	15	3				APKT 1604...	VT40	BT15	0,720
Serie lunga - Lange Ausführung - Long models														
720W WL D20	20	20	150	98	17	9	3	APKT 1003...	VT25	BT08	0,320			
720W WL D25	25	25	150	94	19	9	3				0,500			
Serie extra lunga - Extralange Ausführung - Extralong models														
720W WXL D20	20	20	180	125	17	9	3	APKT 1003...	VT25	BT08	0,390			
720W WXL D25	25	25	200	140	19	9	3				0,680			
720W WXL D32	32	32	220	160	30	15	3				APKT 1604...	VT40	BT15	1,250

FRESE PER LAMATURA ED ALESATURA SENKFRÄSER UND AUSBOHRER _ SPOT FACING AND BORING MILLING CUTTERS

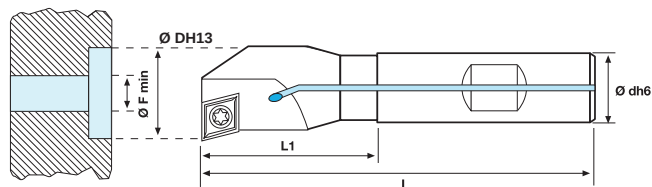

380 W


	Ø D	L	L1	Ø dh6	Ø Fmin	Z				KG		STOCK	PRICELIST on getooling.com
380W W D10	10	85	15	12	4	1	CCMT 060204	VT25B	BT08	0,060	●	●	
380W W D11	11	85	15	12	4	1				0,060	●	●	
380W W D12	12	85	18	12	4	1				0,070	●	●	
380W W D13	13	85	23	12	5	1				0,070	●	●	
380W W D14	14	85	23	12	5	1				0,070	●	●	
380W W D15	15	85	30	12	5	1				0,070	●	●	
380W W D16	16	85	30	12	5	1				0,070	●	●	
380W W D17	17	95	30	16	6	1				0,120	●	●	
380W W D18	18	95	40	16	6	1				0,120	●	●	
380W W D19	19	95	40	16	6	1				0,130	●	●	
380W W D20	20	95	40	16	5	1	CCMT 09T304	VT40	BT15	0,140	●	●	
380W W D21	21	95	42	16	5	1				0,140	●	●	
380W W D22	22	95	42	16	6	1				0,140	●	●	
380W W D23	23	95	42	16	6	1				0,170	●	●	
380W W D24	24	95	42	16	6	1				0,280	●	●	
380W W D25	25	95	42	16	8	1				0,300	●	●	
380W W D26	26	120	56	20	8	1				0,300	●	●	
380W W D27	27	120	56	20	9	1				0,310	●	●	
380W W D28	28	120	56	20	10	1				0,320	●	●	
380W W D29	29	120	56	20	11	1				0,320	●	●	
380W W D30	30	120	56	20	12	1				0,340	●	●	
380W W D31	31	120	56	20	12	1				0,360	●	●	
380W W D32	32	120	56	20	13	1				0,360	●	●	
380W W D33	33	120	56	20	14	1				0,360	●	●	

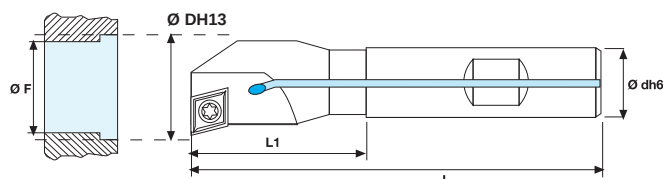

385 W


	Ø D	L	L1	Ø dh6	Ø Fmin	Z				KG		STOCK	PRICELIST on getooling.com
385W W D10	9,8	90	23	8	4,5	1	CCMT 060204	VT25B	BT08	0,060	●	●	
385W W D11	10,8	105	24	10	3,5	1				0,060	●	●	
385W W D12	11,8	105	25	10	3	1				0,070	●	●	
385W W D13	12,8	105	26	10	2,5	1				0,070	●	●	
385W W D14	13,8	110	27	12	3	1				0,070	●	●	
385W W D15	14,8	120	28	12	3,5	1				0,070	●	●	
385W W D16	15,8	125	29	12	4	1				0,070	●	●	
385W W D17	16,8	140	30	16	5	1				0,120	●	●	
385W W D18	17,8	140	31	16	6	1				0,120	●	●	
385W W D19	18,8	150	32	16	7	1				0,130	●	●	
385W W D20	19,8	150	33	16	8	1	CCMT 09T304	VT40	BT15	0,140	●	●	
385W W D21	20,8	160	34	16	9	1				0,140	●	●	
385W W D22	21,8	160	35	20	10	1				0,140	●	●	
385W W D23	22,8	165	36	20	11	1				0,170	●	●	
385W W D24	23,8	170	37	20	12	1				0,280	●	●	
385W W D25	24,8	180	38	20	13	1				0,300	●	●	
385W W D26	25,8	185	39	20	14	1				0,300	●	●	
385W W D27	26,8	190	40	20	15	1				0,310	●	●	
385W W D28	27,8	190	41	20	16	1				0,320	●	●	
385W W D29	28,8	200	42	20	17	1				0,320	●	●	
385W W D30	29,8	200	43	25	18	1				0,340	●	●	
385W W D31	30,8	200	44	25	19	1				0,360	●	●	
385W W D32	31,8	200	45	25	20	1				0,360	●	●	

FRESE PER LAMATURA 180° _ 180° SENKFRÄSER _ 180° SPOT-FACING END MILLS

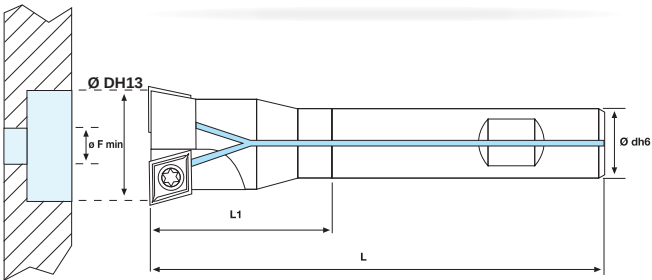


480 W	Ø D	L	L1	(mm) Ø dh6	Ø Fmin	Z						STOCK	PRICELIST on getooling.com
480W W D15	15	92	30	12	5	2	CCMT 060204	VT25B	BT08	0,070			
480W W D16	16	92	30	12	5	2				0,070			
480W W D17	17	94	32	16	6	2				0,120			
480W W D17,5	17.5	96	40	16	6.5	2				0,120			
480W W D18	18	97	41	16	7	2				0,120			
480W W D19	19	100	41	16	8	2				0,130			
480W W D20	20	102	41	16	9	2				0,140			
480W W D21	21	105	41	16	10	2				0,150			
480W W D22	22	110	41	16	11	2				0,160			
480W W D23	23	112	41	16	12	2				0,170			
480W W D24	24	115	41	16	13	2				0,180			
480W W D25	25	120	40	16	8	2				0,180			
480W W D26	26	125	55	20	9	2				0,270			
480W W D27	27	128	55	20	10	2				0,300			
480W W D28	28	130	55	20	11	2				0,310			
480W W D29	29	132	55	20	12	2	CCMT 09T304	VT40	BT15	0,330			
480W W D30	30	134	55	20	13	2				0,340			
480W W D31	31	136	55	20	14	2				0,350			
480W W D32	32	138	55	20	15	2				0,370			
480W W D33	33	140	55	20	16	2				0,390			
480W W D34	34	140	60	25	16	2				0,540			
480W W D35	35	140	60	25	17	2				0,550			
480W W D36	36	140	60	25	18	2				0,560			
480W W D37	37	140	60	25	19	2				0,580			
480W W D38	38	140	60	25	20	2				0,590			
480W W D39	39	140	60	25	21	2	CCMT 120404	VT50	BT20	0,610			
480W W D40	40	140	60	25	22	2				0,620			
480W W D41	41	140	60	25	23	2				0,640			
480W W D42	42	140	60	25	24	2				0,650			
480W W D43	43	150	70	25	24	2				0,670			
480W W D44	44	150	70	25	24	2				0,690			
480W W D45	45	150	70	25	24	2				0,700			
480W W D46	46	150	70	25	24	2				0,720			
480W W D47	47	150	70	25	24	2				0,740			
480W W D48	48	150	70	25	24	2				0,760			

FRESE PER LAMATURA A TIRARE 180° RÜCKWÄRTSSENKER 180° _ 180° BACK FACING MILLING CUTTERS


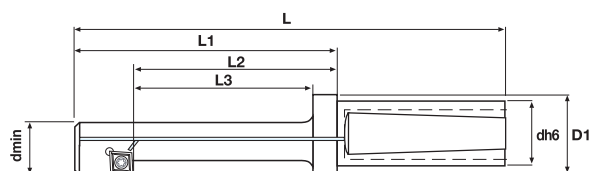


360 W		D	Dmin	L	L1 L2 L3 (mm)			dh6	D1	e				KG		STOCK	PRICELIST on getooling.com
360W D15	(HE)	15	8.5	105	55	42	35	20	25	3.5	CPMT 05T104...	VT22	BT07	0,170	--	●	
360W D18	(HE)	18	10.5	112	62	47	40	20	25	4				0,170	--	●	
360W W D20	(HE)	20	13	117	67	52	45	20	25	3.75	CCMT 060204	VT25B	BT08	0,180	💧	●	
360W W D24	(HE)	24	15	122	72	57	50	20	25	4.75				0,190	💧	●	
360W W D26	(HE)	26	17	132	82	67	60	20	25	5				0,210	💧	●	
360W W D30	(HE)	30	19	142	92	77	65	20	25	6				0,250	💧	●	
360W W D33	(HE)	33	21	152	102	82	75	20	25	6.5	CCMT 09T304	VT40	BT15	0,270	💧	●	
360W W D36	(HE)	36	23	173	113	93	85	32	40	7				0,630	💧	●	
360W W D40	(HE)	40	25	183	123	103	95	32	40	8				0,670	💧	●	
360W W D43	(HE)	43	30	183	123	103	95	32	40	7				0,860	💧	●	
360W W D48	(HE)	48	33	223	163	143	135	32	40	8	CCMT 120404	VT50	BT20	1,120	💧	●	
360W W D53	(HB)	53	36	210	140	--	110	40	--	9				1,420	💧	●	
360W W D57	(HB)	57	39	220	150	--	120	40	--	9.5				1,620	💧	●	
360W W D66	(HB)	66	45	245	165	--	135	50	--	11				2,620	💧	●	
360W W D76	(HB)	76	52	265	185	--	155	50	--	12.5				3,250	💧	●	

FRESE PER SMUSSO A TIRARE 45° _ RÜCKWÄRTSFAS 45° _ BACK CHAMFERING MILLING CUTTER 45°

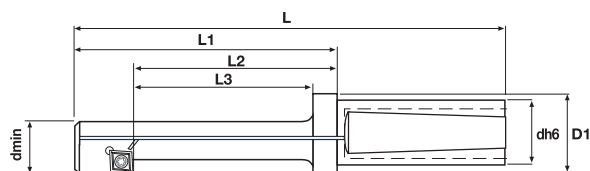

370 W		D	Dmin	L	L1 L2 L3 (mm)			dh6	D1	e				KG		STOCK	PRICELIST on getooling.com
370W D15	(HE)	15	10	105	55	42	35	20	25	2.70	TCMT 0802...	VT22B	BT06	0,170	--	●	
370W W D20	(HE)	20	14	110	60	47	40	20	25	3.20	TCMT 1102...	VT25B	BT08	0,180	💧	●	
370W W D23	(HE)	23	17	120	70	57	50	20	25	3.20				0,190	💧	●	
370W W D27	(HE)	27	21	140	90	77	70	20	25	3.20				0,210	💧	●	
370W W D31	(HE)	31	24	150	100	87	80	20	25	3.70				0,250	💧	●	

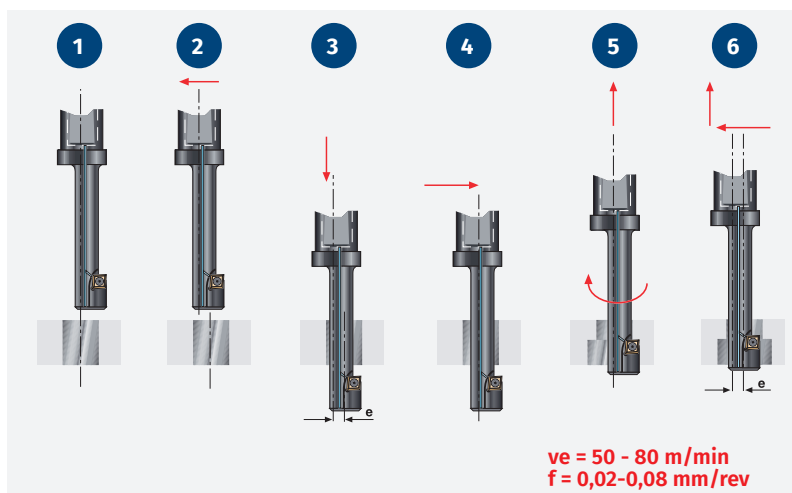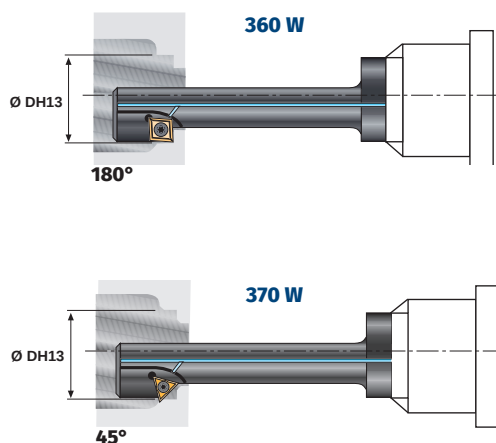


BARENI REGISTRABILI PER ALESATURA **EINSTELLBARE FEINBOHRSTANGEN _ ADJUSTMENT BORING BARS**



R.A.I.



R.A.I. CCMT...

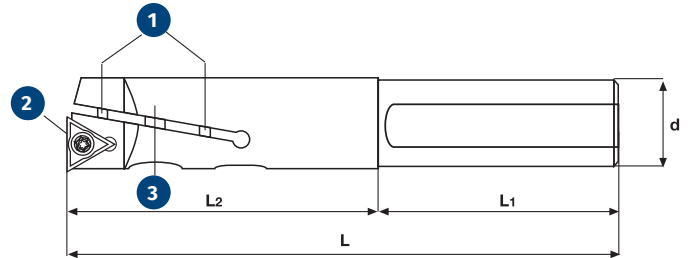


R.A.I.	L	L1	L2	d	Dmin	Dmax	1	2	3	INSERTO Wendeplatte insert	KG	STOCK	PRICELIST on getooling.com
R.A.I. 06	85	65	20	8	06	07	RE 11	VT24	BL 11	WCMT 0201...	0,020	●	
R.A.I. 07	90	65	25	8	07	08	RE 9	VT20	BL 9	TPGX 0601 ..L	0,020	●	
R.A.I. 08	90	65	25	8	08	10	RE 10	VT20	BL 10	TPGX 0601 ..L	0,030	●	
R.A.I. 10	100	70	30	10	10	12	RE 0	VT20	BL 0	TPGX 0802 ..L	0,070	●	
R.A.I. 12	105	65	40	12	12	15	RE 1	VT20	BL 1	TPGX 0802 ..L	0,100	●	
R.A.I. 15	110	60	50	16	15	20	RE 2	VT20	BL 2	TPGX 0802 ..L	0,170	●	
R.A.I. 20	120	60	60	20	20	25	RE 3	VT25	BL 3	TCMT 1102...	0,270	●	
R.A.I. 25	140	70	70	25	25	30	RE 4	VT40	BL 4	TCMT 16T3...	0,480	●	
R.A.I. 30	160	70	90	25	30	35	RE 5	VT40	BL 5	TCMT 16T3...	0,620	●	
R.A.I. 35	170	70	100	32	35	40	RE 6	VT40	BL 6	TCMT 16T3...	1,050	●	
R.A.I. 40	190	70	120	32	40	45	RE 7	VT40	BL 7	TCMT 16T3...	1,400	●	
R.A.I. 45	220	70	150	32	45	50	RE 8	VT40	BL 8	TCMT 16T3...	2,040	●	
R.A.I. 10 CCMT	100	70	30	10	10	12	RE 1	VT25B	BL 0	CCMT 0602...	0,070	●	
R.A.I. 12 CCMT	105	65	40	12	12	15	RE 1	VT25B	BL 1	CCMT 0602...	0,100	●	
R.A.I. 15 CCMT	110	60	50	16	15	20	RE 2	VT25B	BL 2	CCMT 0602...	0,170	●	
R.A.I. 20 CCMT	120	60	60	20	20	25	RE 3	VT25B	BL 3	CCMT 0602...	0,270	●	
R.A.I. 25 CCMT	140	70	70	25	25	30	RE 4	VT35	BL 4	CCMT 09T3...	0,480	●	
R.A.I. 30 CCMT	160	70	90	25	30	35	RE 5	VT35	BL 5	CCMT 09T3...	0,620	●	
R.A.I. 35 CCMT	170	70	100	32	35	40	RE 6	VT35	BL 6	CCMT09T3...	1,050	●	
R.A.I. 40 CCMT	190	70	120	32	40	45	RE 7	VT35	BL 7	CCMT 09T3...	1,400	●	
R.A.I. 45 CCMT	220	70	150	32	45	50	RE 8	VT35	BL 8	CCMT 09T3...	2,040	●	

Serie lunga - Lange Ausführung - Long models

R.A.I. 12 SL	130	70	60	12	12	15	RE 1	VT20	BL 1	TPGX 0802 ..L	0,200	○	
R.A.I. 15 SL	140	70	70	16	15	20	RE 2	VT20	BL 2	TPGX 0802 ..L	0,270	○	
R.A.I. 20 SL	150	70	80	20	20	25	RE 3	VT25	BL 3	TCMT 1102...	0,370	○	
R.A.I. 25 SL	170	70	100	25	25	30	RE 4	VT40	BL 4	TCMT 16T3...	0,580	○	
R.A.I. 30 SL	190	70	120	25	30	35	RE 5	VT40	BL 5	TCMT 16T3...	0,720	○	
R.A.I. 35 SL	220	70	150	32	35	40	RE 6	VT40	BL 6	TCMT 16T3...	1,150	○	



Ø d 16 = VT.FB.030
Ø d 22 = VT.FB.035

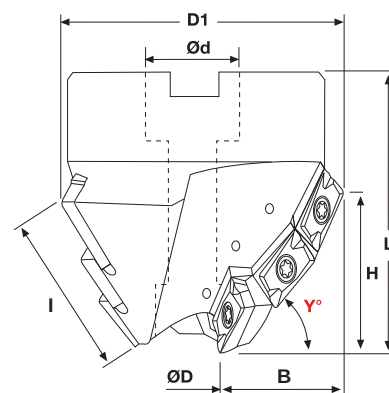

15°-20°-30°-40°-45°-60°-75°


FB: 030	(mm)										APHT APHX APKT 1003...	VT25	BT08	KG	STOCK	PRICELIST on getooling.com
	ØD	D1	Ød	L	B	I	Y°	H	Z	K						
FB.030.001 W	17	56	22	50	17,8	27,5	45°	19	9	3				0,470	●	
FB.030.002 W	17	45	16	50	13	27,5	60°	24	9	3				0,280	●	
FB.030.003 W	17	65	22	50	24	27,5	30°	13	9	3				0,600	●	
FB.030.004 W	17	70	22	50	27	27,5	15°	7	9	3				0,770	●	
FB.030.005 W	19	33	16	60	7	27,5	75°	27	9	3				0,270	●	
FB.030.006 W	17	60	22	50	19	27,5	40°	17	9	3				0,520	●	
FB.030.007 W	17	69	22	50	26	27,5	20°	9	9	3				0,700	●	

Disponibile a richiesta anche FB 030 con gradazioni differenti Y°
Lieferbar auf Anfrage FB 030 mit verschiedenen Graden Y°
Available on request FB 030 with different grades Y°

K= Fattore d'avanzamento _ Vorschubfaktor _ Factor of feed



Ø d 22 = VT.FB.035
Ø d 27 = VT.FB.STANDARD
(DIN912 M12X 30)

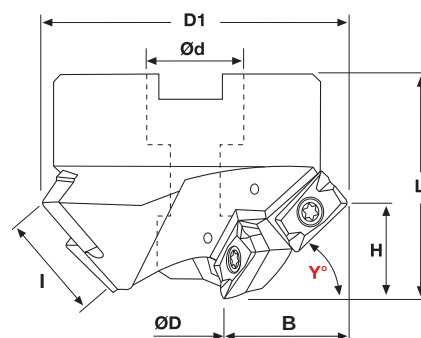

10°-15°-20°-30°-40°-45°-50°-60°-75°

FB: 035	(mm)										APHT APHX APKT 1604...	VT40	BT15	KG	STOCK	PRICELIST on getooling.com
	ØD	D1	Ød	L	B	I	Y°	H	Z	K						
FB.035.001 W	35	77,8	27	50	21,4	30	45°	21,5	6	3				0,780	●	
FB.035.002 W	35	65	27	50	15,1	30	60°	26,5	6	3				0,580	●	
FB.035.003 W	35	88	27	50	26,5	30	30°	15,0	6	3				1,000	●	
FB.035.004 W	35	94	27	50	29,5	30	15°	8,0	6	3				1,190	●	
FB.035.005 W	35	50,7	22	60	8	30	75°	29,5	6	3				0,460	●	
FB.035.006 W	35	84	27	50	24,5	30	40°	19	6	3				0,860	●	
FB.035.007 W	35	91	27	50	28,5	30	20°	10	6	3				1,130	●	
FB.035.008 W	35	73	27	50	18	30	50°	23	6	3				0,820	●	
FB.035.009 W	35	98	27	50	32	30	10°	6	6	3				1,260	●	

Disponibile a richiesta anche FB 035 con gradazioni differenti Y°
Lieferbar auf Anfrage FB 035 mit verschiedenen Graden Y°
Available on request FB 035 with different grades Y°

K= Fattore d'avanzamento _ Vorschubfaktor _ Factor of feed

ESEMPIO SET _ SATZ BEISPIEL _ SET EXAMPLE

BOX
TCMT SET W

Frese smussi e svasature
Fasen Fräser
Milling cutters for chamfering



STOCK

Art. SET 300W W - 45°

n° 1 300.016 WW

0,270

SPECIAL
NET PRICE
PROMO

n° 1 300.021 WW

BOX
TCMT SET W

Frese smussi e svasature
Fasen Fräser
Milling cutters for chamfering



STOCK

Art. SET 310W W - 60°

n° 1 310.016 WW

0,270

SPECIAL
NET PRICE
PROMO

n° 1 310.027 WW

BOX
TCMX SET W

Frese per smussi, scanalature a V e centrare 45°
Fas-und Zentrierfräser 45°
Center drilling, chamfering and V grooving 45°



STOCK

Art. SET 311W W

n° 1 311.020 WW

0,330

SPECIAL
NET PRICE
PROMO

n° 4 TCMX 16T3ZR TiN

BOX
SEEX SET W

Frese per smussi, scanalature a V e centrare 45° / 30°
Fas-und Zentrierfräser 45° / 30°
Center drilling, chamfering and V grooving 45° / 30°



STOCK

Art. SET 160W - 45°

n° 1 160.45 W

0,250

--

SPECIAL
NET PRICE
PROMO

n° 5 SEEX 12T408 TiN

BOX
TCGX SET W

Fresa per sbavatura e smusso 45°
Fasen Fräser 45°
Chamfering Milling Cutter 45°



STOCK

Art. SET 7745-0525

n° 1 7745VT16-C12-0525

0,200

--

SPECIAL
NET PRICE
PROMO

n° 4 TCGX 163504...




FRESE MODULARI PER SPALLAMENTO EINSCHRAUBKUGELGESENKFRÄSER _ THREADED TYPE MILLING CUTTERS




MILLING

MINIMILL




MOULDMILL

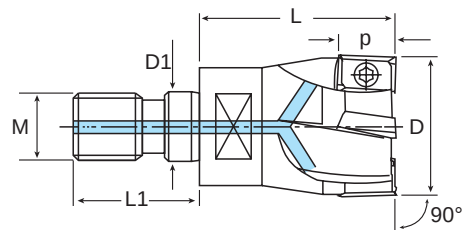


741MO.N	↔ (mm)												STOCK	PRICELIST on getooling.com
	D	D1	L	L1	M	p	Z				KG			
741MO D10/2 N	10	6,5	16	14,5	M6	5,2	2		VT18	BT06	0,010			
741MO D12/3 N	12	6,5	16	14,5	M6	5,2	3				0,010			
741MO D16/4 N	16	8,5	21	17,5	M8	5,2	4				0,020			
741MO D20/5 N	20	10,5	26	20	M10	5,2	5				0,050			
741MO D25/7 N	25	12,5	30	22	M12	5,2	7				0,100			
741MO D32/8 N	32	17	43	23	M16	5,2	8				0,240			

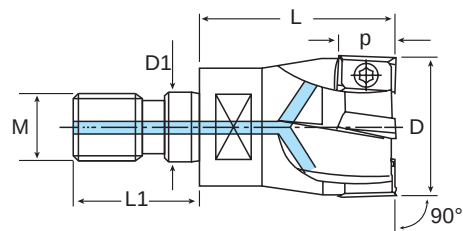

740MO	D	D1	 (mm)		L	L1	M	p	β	Z						STOCK	PRICELIST on getooling.com
740MO D10/1	10	6,5	20	14,5	M6	10	11,0°	1	APHT APHX APKT 1003...	VT25	BT08	0,010					
740MO D12/1	12	6,5	20	14,5	M6	10	9,0°	1				0,010					
740MO D16/2	16	8,5	25	17,5	M8	10	3,5°	2				0,020					
740MO D20/3	20	10,5	30	20	M10	10	1,5°	3				0,050					
740MO D25/3	25	12,5	35	22	M12	10	0,9°	3				0,100					
740MO D25/4	25	12,5	35	22	M12	10	0,9°	4				0,900					
740MO D28/4	28	12,5	35	22	M12	10	0,9°	4				0,120					
740MO D30/4	30	17	43	24	M16	10	0,6°	4				0,210					
740MO D32/5	32	17	43	24	M16	10	0,6°	5				0,220					







FRESE MODULARI PER SPALLAMENTO EINSCHRAUBKUGELGESENKFRÄSER _ THREADED TYPE MILLING CUTTERS

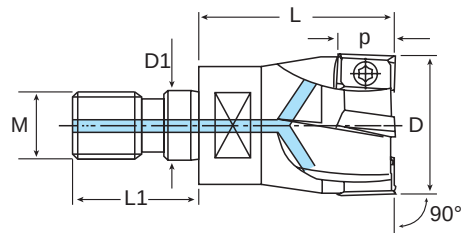


745MO

	D	D1	L	L1	M	p	β	z				KG		STOCK	PRICELIST on getooling.com
745MO D20/3	20	10,5	30	20	M10	10	4,0°	3	LNEX LNKX LNMX 10...	VT 30 745	BT09	0,050	●	●	
745MO D25/3	25	12,5	35	22	M12	10	3,5°	3				0,100	●	●	
745MO D32/4	32	17	43	24	M16	10	3,0°	4				0,230	●	●	






FRESE MODULARI PER SMUSSO EINSCHRAUBFASENFRÄSER _ THREADED TYPE MILLING CUTTERS

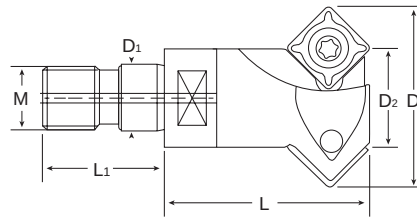


321MO


	D	D1	D2	L	L1	M	z				KG		STOCK	PRICELIST on getooling.com
321MO D12/1	23,7	8,5	12	30	17,5	8	1	SPGT SPMT 09T3...	VT35S	BT15	0,190	●	●	
321MO D16/2	28,8	10,5	16	30	20	10	2				0,150	●	●	
321MO D30/3	42,3	17	30	35	24	16	3				0,270	●	●	




FRESE A COPIARE EINSCHRAUBKUGELGESENKFRÄSER FÜR RUND - WSP _ THREADED TYPE MILLING CUTTERS




400M	D	d	H	p	β	z						KG		STOCK	PRICELIST on getooling.com
400M 042-10/6	42	16	44	5	—	6	RD.. 1003...					0,240		●	
400M 052-12/5	52	22	50	6	5,7°	5	RD.. 12T3...	VT35	--	CVB 35	BT15	0,360		●	
400M 066-12/6	66	27	50	6	4,1°	6	RD.. 12T3...					0,610		●	
400M 080-12/7	80	27	50	6	3,2°	7	RD.. 12T3...					1,080		●	
400M 052-16/4	52	22	50	8	8,8°	4	RD.. 1604...					0,330		●	
400M 066-16/5	66	27	50	8	6,0°	5	RD.. 1604...					0,500		●	
400M 080-16/6	80	27	50	8	4,5°	6	RD.. 1604...	VT45	CVB 45	--	BT20	1,050		●	
400M 100-16/7	100	32	55	8	3,7°	7	RD.. 1604...					1,800		●	
400M 125-16/8	125	40	55	8	2,8°	8	RD.. 1604...					2,300		●	
400M 160-16/9	160	40	55	8	1,8°	9	RD.. 1604...					4,460		●	




400MO	D	L	M	D1	L1	p	β	z					KG		STOCK	PRICELIST on getooling.com
400MO D10/2	10	18	M6	6,5	14,5	2,5	28,9°	2	RD.. 0501...	VT18	--	--	0,010		●	
400MO D20/5	20	30	M10	10,5	20	2,5	6,9°	5	RD.. 0501...				0,060		●	
400MO D12/2	12	18	M6	6,5	14,5	3,5	22,7°	2	RD.. 07T1...				0,010		●	
400MO D15/2	15	23	M8	8,5	17,5	3,5	20,0°	2	RD.. 0702...				0,020		●	
400MO D15/3	15	23	M8	8,5	17,5	3,5	20,0°	3	RD.. 0702...	VT2530	--	--	0,030		●	
400MO D20/4	20	30	M10	10,5	20	3,5	11,0°	4	RD.. 0702...				0,060		●	
400MO D25/5	25	35	M12	12,5	22	3,5	7,3°	5	RD.. 0702...				0,100		●	
400MO D30/5	30	43	M16	17	24	3,5	5,4°	5	RD.. 0702...				0,200		●	
400MO D20/2	20	30	M10	10,5	20	5	39,0°	2	RD.. 1003...				0,050		●	
400MO D25/2	25	35	M12	12,5	22	5	14,3°	2	RD.. 1003...				0,100		●	
400MO D25/3	25	35	M12	12,5	22	5	14,3°	3	RD.. 1003...				0,090		●	
400MO D30/4	30	43	M16	17	24	5	9,3°	4	RD.. 1003...	VT35	--	--	0,200		●	
400MO D35/4	35	43	M16	17	24	5	7,3°	4	RD.. 1003...				0,200		●	
400MO D35/5	35	43	M16	17	24	5	7,3°	5	RD.. 1003...				0,250		●	
400MO D42/5	42	43	M16	17	24	5	5,4°	5	RD.. 1003...				0,250		●	
400MO D24/2	24	35	M12	12,5	22	6	—	2	RD.. 12T3...				0,100		●	
400MO D35/3	35	43	M16	17	24	6	—	3	RD.. 12T3...	VT35	--	CVB 35	0,200		●	
400MO D42/4	42	43	M16	17	24	6	8,3°	4	RD.. 12T3...				0,250		●	
400MO D32/2	32	43	M16	17	24	8	—	2	RD.. 1604...	VT45	CVB 45	--	0,200		●	

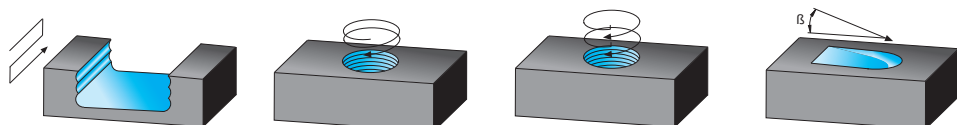

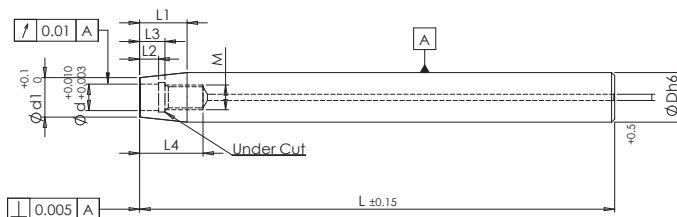



PCIMD											↔ (mm)		STOCK	PRICELIST on getooling.com
	D	d	d1	L	L1	L2	L3	L4	M	KG				
PCIMD12 060 M06	12	6,5	9,7	60	15	5	8	19	6	0,100		●		
PCIMD12 080 M06	12	6,5	9,7	80	15	5	8	19	6	0,140		●		
PCIMD12 100 M06	12	6,5	9,7	100	15	5	8	19	6	0,200		●		
PCIMD12 150 M06	12	6,5	9,7	150	15	5	8	19	6	0,300		●		
PCIMD16 080 M08	16	8,5	12,7	80	15	6	9	20	8	0,350		●		
PCIMD16 100 M08	16	8,5	12,7	100	15	6	9	20	8	0,350		●		
PCIMD16 120 M08	16	8,5	12,7	120	15	6	9	20	8	0,350		●		
PCIMD16 150 M08	16	8,5	12,7	150	15	6	9	20	8	0,350		●		
PCIMD16 200 M08	16	8,5	12,7	200	15	6	9	20	8	0,600		●		
PCIMD20 100 M10	20	10,5	17,7	100	20	10	13	26	10	0,500		●		
PCIMD20 140 M10	20	10,5	17,7	140	20	10	13	26	10	0,700		●		
PCIMD20 200 M10	20	10,5	17,7	200	20	10	13	26	10	0,900		●		
PCIMD25 100 M12	25	12,5	20,7	100	30	10	13	26	12	0,500		●		
PCIMD25 150 M12	25	12,5	20,7	150	30	10	13	26	12	0,500		●		
PCIMD25 200 M12	25	12,5	20,7	200	30	10	13	26	12	0,900		●		
PCIMD25 250 M12	25	12,5	20,7	250	30	10	13	26	12	1,-0		●		
PCIMD32 100 M16	32	17	28,7	100	30	10	14	30	16	1,250		●		
PCIMD32 150 M16	32	17	28,7	150	30	10	14	30	16	1,900		●		

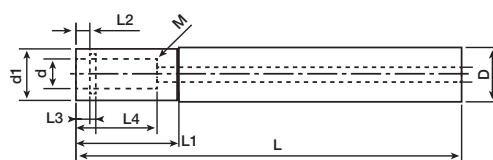

PCCMD															STOCK	PRICELIST on getooling.com
	D	d	d1	L	L1	L2	L3	L4	M							
PCCMD10 150 M6	10	6,5	9,8	150	30	5	7	19	6	0,300						
PCCMD12 150 M6	12	6,5	10,8	150	27	5	7	19	6	0,300						
PCCMD16 150 M8	16	8,5	15	150	27	6	8	20	8	0,350						
PCCMD16 200 M8	16	8,5	15	200	31	6	8	20	8	0,600						
PCCMD20 200 M10	20	10,5	18	200	36	10	12	24	10	0,900						
PCCMD20 250 M10	20	10,5	18	250	44	10	12	24	10	1,-0						
PCCMD25 200 M12	25	12,5	22,5	200	36	10	12	26	12	0,500						
PCCMD25 250 M12	25	12,5	22,5	250	44	10	12	26	12	1,-0						
PCCMD32 250 M16	32	17	28,6	250	44	10	13	28	16	2,100						
PCCMD32 300 M16	32	17	28,6	300	52	10	13	28	16	2,300						

MICROTOOLS AMS

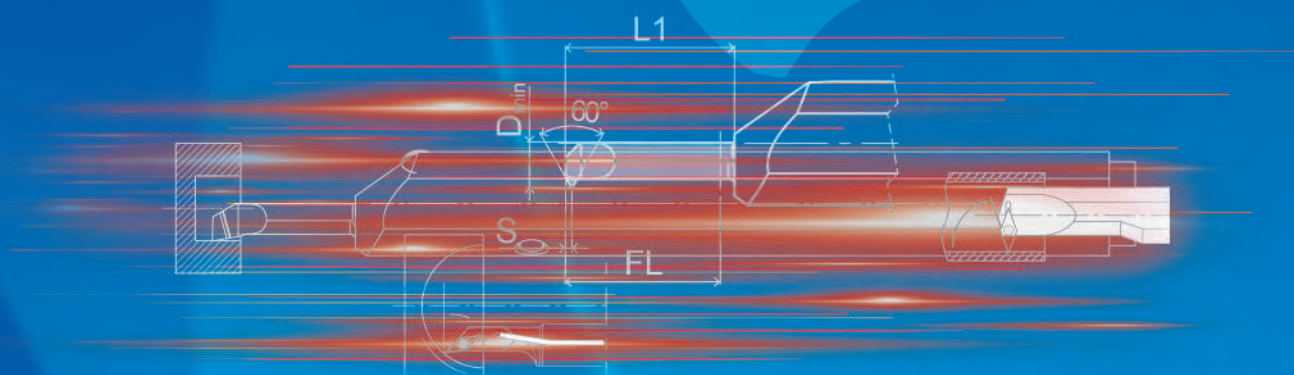

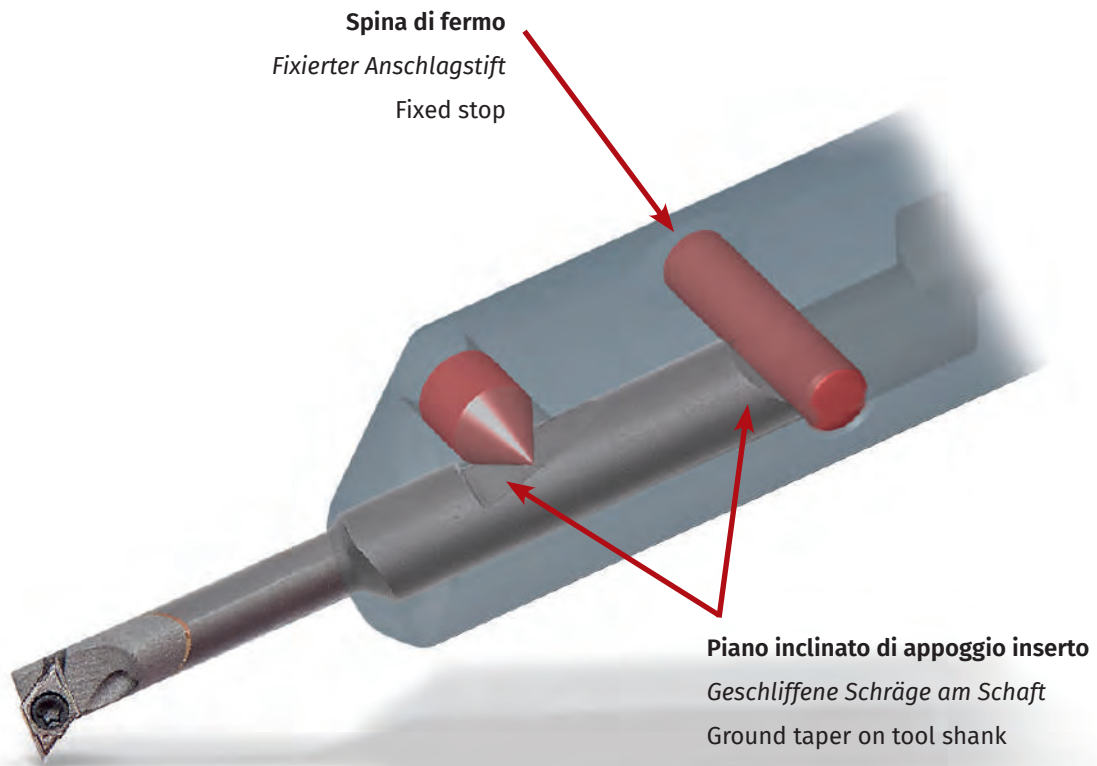MONTAGGIO _ MONTAGE _ ASSEMBLING

Garanzia del centraggio del filo di taglio grazie all'inserto completamente rettificato

Garantierte Spitzenhöhe durch komplett geschliffene Schneideinsätze

Guaranteed tip height due to fully ground inserts


ADATTATORI AMS _ KLEMMHALTER AMS _ HOLDERS AMS

MILLING

MINIMILL

MOULDMILL

MICROTOOLS
AMS

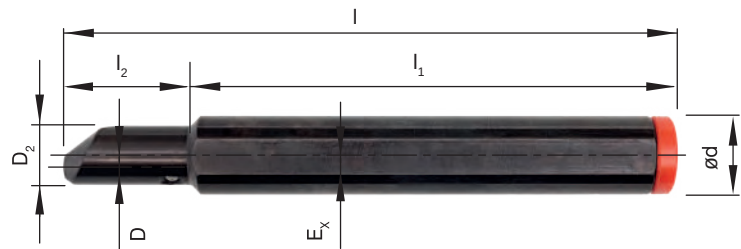


HAMS

	D	D2	d	l	l1	l2	Ex				KG		STOCK	PRICELIST on getooling.com
--	---	----	---	---	----	----	----	--	--	--	----	--	-------	-------------------------------

HAMS 1604R/L

4 12 16 120 95 25 2,35 AS 0043 KVR 16 KP3111 0,150

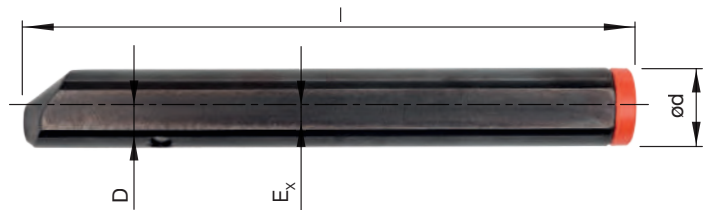

HAMS

	D	d	l	Ex				KG		STOCK	PRICELIST on getooling.com
--	---	---	---	----	--	--	--	----	--	-------	-------------------------------



HAMS 1606R/L

6 16 120 2,8 AS 0044 KVR 16 KP1111 0,160

HAMS 1608R/L

8 16 120 2,8 AS 0044 KVR 16 KP1111 0,160

BARENI PER TORNITURA INTERNA AMS
BOHRSTANGEN FÜR DIE INNENBEARBEITUNG AMS _ INTERNAL BORING BARS AMS

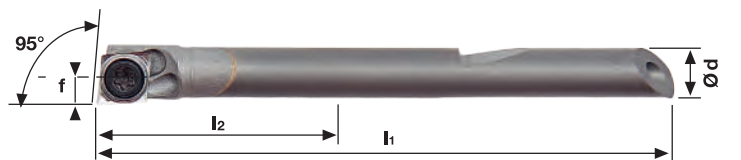

CARBIDE E-SCLDR/L



	d	l1	l2	f	Dmin				KG	STOCK	PRICELIST on getooling.com
--	---	----	----	---	------	--	--	--	----	-------	-------------------------------

E04 SCLDR/L 04 AMS

4 46 24 2,4 4,8 CDGT 0401... VT18B BT06 0,015

E06 SCLDR/L 04 AMS

6 65 37 3,4 6,8 CDGT 0401... VT18B BT06 0,030

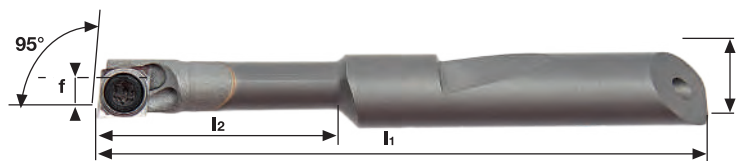




CARBIDE E-SCLCR/L

	d	l1	l2	f	Dmin				KG	STOCK	PRICELIST on getooling.com
--	---	----	----	---	------	--	--	--	----	-------	-------------------------------




E0408 SCLCR/L 03 AMS

8 57 26 2,5 5 CCGT 0301... VT16 BT06 0,022



BARENI PER TORNITURA INTERNA AMS BOHRSTANGEN FÜR DIE INNENBEARBEITUNG AMS _ INTERNAL BORING BARS AMS

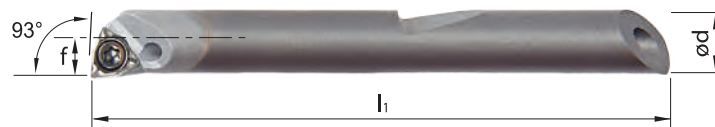

CARBIDE	E-SWUCR/L	(mm)									STOCK	PRICELIST on getooling.com
		d	l1	l2	f	D _{min}						
	E 06 SWUCR/L 02 AMS	6	65	37	3,9	7,8	WCMT WCGT 0201...	VT20B	BT06	0,030	●	



CARBIDE	E-SDUCR/L	(mm)									STOCK	PRICELIST on getooling.com
		d	l1	l2	f	f1	D _{min}					
	E0406 SDUCR/L 04 AMS	6	56	26	3	1,5	5,6	DCGT 04T0...	VT1604	BT05	0,022	●
	E0408 SDUCR/L 04 AMS	8	57	26	3	1,5	5,6				0,022	●





CARBIDE	E-SDQCR/L	(mm)									STOCK	PRICELIST on getooling.com
		d	l1	l2	f	f1	D _{min}					
	E0406 SDQCR/L 04 AMS	6	56	26	2,6	1,1	5,2	DCGT 04T0...	VT1604	BT05	0,022	●
	E0408 SDQCR/L 04 AMS	8	57	26	2,6	1,1	5,2				0,022	●





CARBIDE	E-SVLCR/L	(mm)									STOCK	PRICELIST on getooling.com
		d	l1	l2	f	f1	D _{min}					
	E0406 SVLCR/L 05 AMS	6	56	26	6	3	9,2	VCGT 0501...	VT1604	BT05	0,022	●
	E0408 SVLCR/L 05 AMS	8	57	26	5	3	9,2				0,031	●

BARENI PER TORNITURA INTERNA AMS BOHRSTANGEN FÜR DIE INNENBEARBEITUNG AMS _ INTERNAL BORING BARS AMS

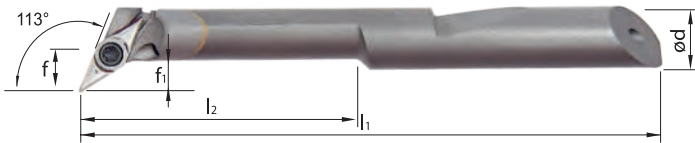

											
CARBIDE	E-SVXCR/L	d	 (mm)							STOCK	PRICELIST on getooling.com
	E0406 SVXCR/L 05 AMS	6	56	26	5 3	8,2	VCMT 0501...	VT1604	BT05	0,022 ●	
	E0408 SVXCR/L 05 AMS	8	57	26	5 3	9,2				0,031 ●	




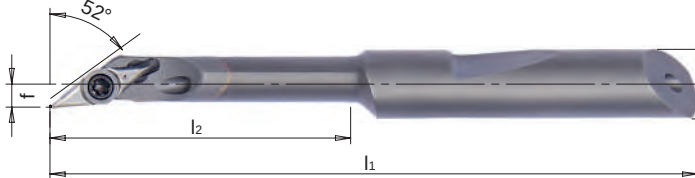




CARBIDE	E-SVJCR/L		(mm)									STOCK	PRICELIST on getooling.com
	d	l1	l2	f	Dmin								
	E0406 SVJCR/L 05 AMS	6	56	26	2	5,5							
	E0408 SVJCR/L 05 AMS	8	57	26	2	5,5							

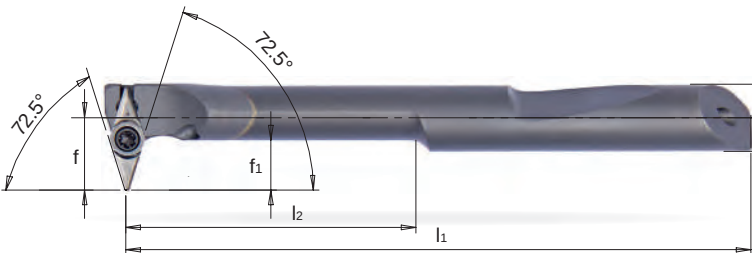
CARBIDE												
	E-SVWCR/L		 (mm)								STOCK	
	E0406 SVWCR/L 05 AMS	d	l1	l2	f	f1	Dmin	VCMT 0501...	VT1604	BT05	0,024	●
	E0408 SVWCR/L 05 AMS	6	56	26	6,5	4,5	10,3				0,035	●

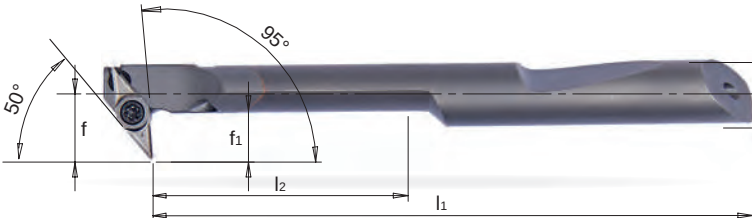


CARBIDE	E-SV95CR/L												
	d	l1 l2		f f1		Dmin					STOCK	PRICELIST on getooling.com	
	$\begin{matrix} \text{---} & \text{---} \\ \text{---} & \text{---} \end{matrix} \text{ (mm)}$												
	E0406 SV95CR/L 05 AMS	6	56	26	6	4,5	9,2	VCMT 0501...	VT1604	BT05	0,024		●
	E0408 SV95CR/L 05 AMS	8	57	26	5	3	9,2				0,037		●

BARENI PER TORNITURA INTERNA AMS BOHRSTANGEN FÜR DIE INNENBEARBEITUNG AMS _ INTERNAL BORING BARS AMS

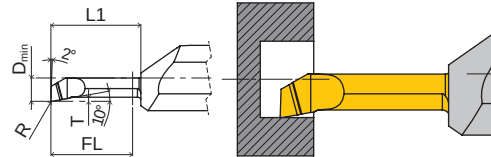


TURNING 95°

	D_{min}	FL	R	T	L1	STOCK	PRICELIST on getooling.com		
			(mm)				K15	TiN	TiALN
GEMCS-D-250401-200.40R	2,5	20	0,1	0,4	22	○			
GEMCS-D-300401-200.40R	3,0	20	0,1	0,4	22	○			
GEMCS-D-390602-150.40R	3,9	15	0,2	0,6	17	○			
GEMCS-D-590802-200.60R	5,9	20	0,2	0,8	22	○			
GEMCS-D-590801-150.60R	5,9	15	0,1	0,8	17	○			
GEMCS-D-6005015-420.60R	6,0	42	0,15	0,8	44	○			

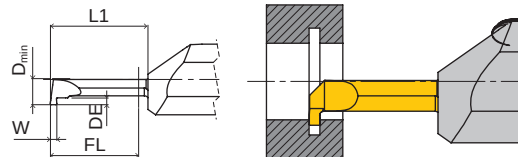

GROOVING

	D_{min}	W	DE	FL	L1	STOCK	PRICELIST on getooling.com		
			(mm)				K15	TiN	TiALN
GEMCS-S-39100800-100.40R	3,9	1	0,8	10	12	○			
GEMCS-S-59151800-100.60R	5,9	1,5	1,8	10	12	○			
GEMCS-S-69202500-150.80R	6,9	2	2,5	15	17	○			
GEMCS-S-79182500-250.80R	7,9	1,8	2,5	25	27	○			

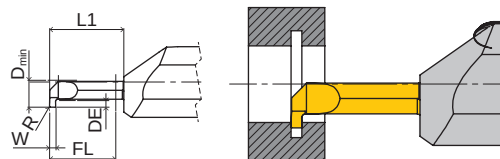

CIR-CLIP DIN471/472

	D_{min}	W	DE	R	FL	L1	STOCK	PRICELIST on getooling.com		
			(mm)					K15	TiN	TiALN
GEMCS-472-41139110-150.40R	4,1	1,39	1,1	0,05	15	17	○			
GEMCS-472-84119200-200.80R	8,4	1,19	2	0,05	20	22	○			
GEMCS-472-84169250-200.80R	8,4	1,69	2,5	0,05	20	22	○			



BARENI PER TORNITURA INTERNA AMS BOHRSTANGEN FÜR DIE INNENBEARBEITUNG AMS _ INTERNAL BORING BARS AMS

MILLING

MINIMILL


MOULDMILL

MICROTOOLS
AMS

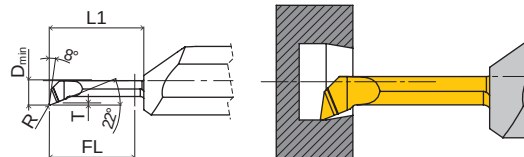


COPYING

	D_{min}	FL	R	T	L1	STOCK	PRICELIST on gettooling.com		
GEMCS-K-390802-150.40R	3,9	15	0,2	0,8	17	○	K15	TiN	TiALN
GEMCS-K-500502-250.60R	5	25	0,2	0,5	26	○			
GEMCS-K-591802-200.60R	5,9	20	0,2	1,8	22	○			

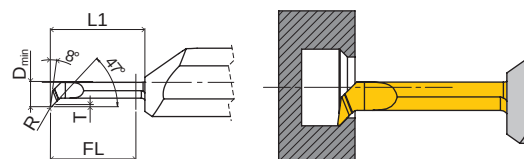


COPYING 45°

	D_{min}	FL	R	T	L1	STOCK	PRICELIST on gettooling.com		
GEMCS-K45-391304-200.40R	3,9	20	0,4	1,3	22	○	K15	TiN	TiALN
GEMCS-K45-400604-150.40R	4	15	0,4	0,6	17	○			

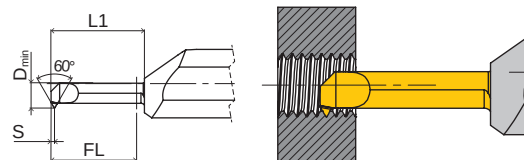

THREADING 60°, METRIC PARTIAL PROFILE


	D_{min}	Th	P	S	FL	L1	STOCK	PRICELIST on gettooling.com		
GEMCS-G-M5-150.40R	4	M5	0,5-1,0	0,7	15	17	○	K15	TiN	TiALN
GEMCS-G-M8-200.60R	6	M8	0,5-1,5	0,8	20	22	○			

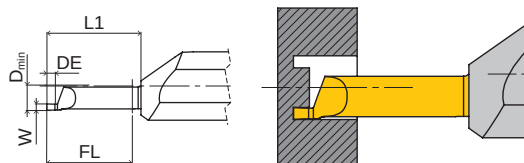

AXIAL GROOVING




	D_{min}	W	DE	FL	L1	STOCK	PRICELIST on gettooling.com		
GEMCS-A-70152000-200.60R	7	1,5	2	20	22	○	K15	TiN	TiALN
GEMCS-A-90152000-250.80R	9	1,5	2	25	27	○			

ADATTATORI KLEMMHALTER _ HOLDERS

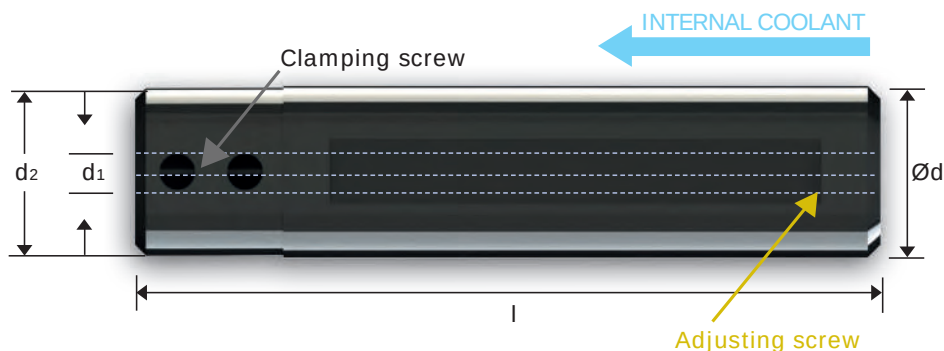

GEH	d	d1 (mm)	d2 (mm)	l (mm)	CLAMPING SCREW	ADJUSTING SCREW	KEY	STOCK	PRICELIST on getooling.com
GEH16-6	16	6,0	20	88	S25	S35	K25	○	
GEH20-6	20	6,0	20	88	S25	S35	K25	○	
GEH16-8	16	8,0	20	88	S25	S35	K25	○	
GEH20-8	20	8,0	20	88	S25	S35	K25	○	

BARENI PER TORNITURA INTERNA BOHRSTANGEN FÜR DIE INNENBEARBEITUNG _ INTERNAL BORING BARS

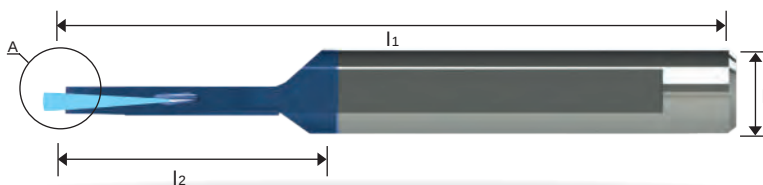

GEVR/L	d	l1 (mm)	l2 (mm)	B (mm)	F (mm)	Dmin (mm)	STOCK	PRICELIST on getooling.com	HOLDER EXAMPLE
GEVR/L6-2.0B-15L	6,0	64	15	2,0	1,7	12,0	○	TiALN	GHE ... - 6
GEVR/L6-2.0B-22L	6,0	64	22	2,0	1,7	12,0	○	TiALN	GHE ... - 6
GEVR/L6-2.5B-22L	6,0	64	22	2,5	2,2	12,0	○	TiALN	GHE ... - 6
GEVR/L8-3.0B-27L	8,0	64	27	3,0	2,5	15,0	○	TiALN	GHE ... - 8
GEVR/L8-3.0B-43L	8,0	80	43	3,0	1,6	15,0	○	TiALN	GHE ... - 8
GEVR/L8-4.0B-43L	8,0	80	43	4,0	1,6	20,0	○	TiALN	GHE ... - 8


Order example: GEVR6-2.0B-22L TiALN

CUTTING SPEED FOR MICRO TOOLS Recommended Feed rate 0.01-0.03 mm/rev



ISO	P			M	K			N				S		H				
MATERIAL	Non-Alloy Steel and Cast Steel, Free Cutting Steel	Low Alloy Steel and Cast Steel (less than 5% alloying elements)	High Alloy Steel, Cast Steel and Tool Steel	Stainless Steel and Cast Steel	Cast Iron Nodular (GGG)	Grey Cast Iron (GG)	Malleable Cast Iron	Aluminium-Wrought Alloy	Aluminum-Cast, Alloyed		Copper Alloys	Non Metallic	High Temp. Alloys, Super Alloys		Titanium Alloys	Hardened Steel	Chilled Cast Iron	Cast Iron
	< 0.25% C ≥ 0.25% C < 0.55% C ≥ 0.55% C							-	<= 12% Si	> 12% Si	> 1% Pb	-	Fe based	Ni or Co based	-		Cast	Hardened
CUTTING SPEED m/min TiAlN	30-80	25-50	25-50	30-60	30-80	30-80	20-50	60-120	50-90		30-70	-	15-40		10-30	15-40	10-30	10-20

MINITOOLS

MINITOOLS

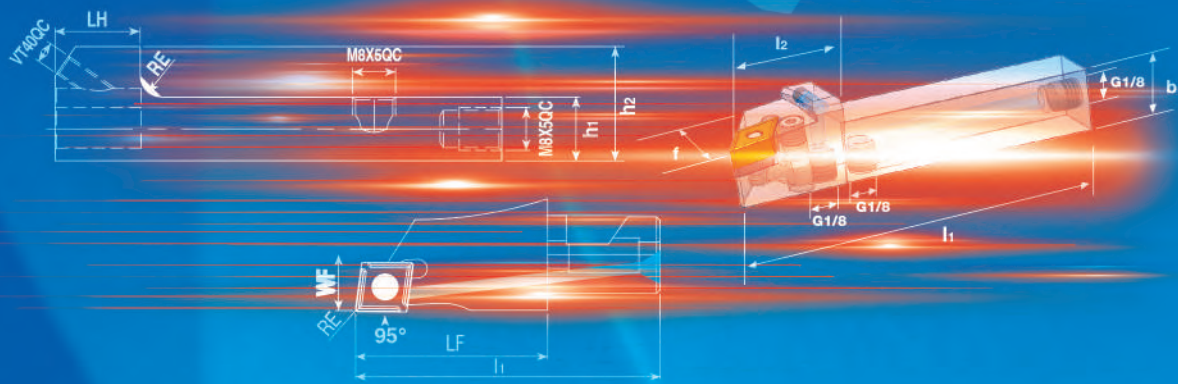

BARENI PER TORNITURA INTERNA BOHRSTANGEN FÜR DIE INNENBEARBEITUNG _ INTERNAL BORING BARS

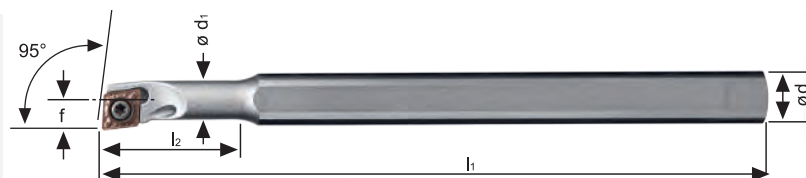

STEEL	A-SCLCR/L											STOCK	PRICELIST on getooling.com
	d	d1	l1	l2	f	Dmin							
A 0608H SCLCR/L 06	8	6	100	21,5	4,2	8,5	CCMT CCGT 0602...	VT25B	BT08	0,050			
A 0810J SCLCR/L 06	10	8	110	27	6	12				0,070			
A 1012K SCLCR/L 06	12	10	125	32,5	7	14				0,100			
A 1216M SCLCR/L 06	16	12	150	42	9	18				0.200			

HSS	AH-SCLCR/L		 (mm)							STOCK	PRICELIST on getooling.com									
	d	d1	l1	l2								f	D _{min}							
	AH 0608H SCLCR/L 06	8	6	100								25	4	8,5	CCMT CCGT 0602...	VT25B	BT08	0,050		
	AH 0810J SCLCR/L 06	10	8	110								32	6	12				0,070		
	AH 1012K SCLCR/L 06	12	10	125								38	7	14				0,100		
AH 1216M SCLCR/L 06	16	12	150	50	9	18	0,200													

STEEL	A-SCLDR/L											STOCK	PRICELIST on getooling.com	
	d	d1	l1	l2	f	Dmin								
	A 0408H SCLDR/L 04	8	4	100	16	2,4								4,8
	A 0508H SCLDR/L 04	8	5	100	20	2,9								5,8
	A 0608H SCLDR/L 04	8	6	100	24	3,4								6,8

CARBIDE	E-SCLDR/L		 (mm)							 KG		STOCK	PRICELIST on getooling.com	
	d	d1	l1	l2	f	Dmin								
	E 0408H SCLDR/L 04	8	4	100	24	2,4								4,8
	E 0508H SCLDR/L 04	8	5	100	30	2,9								5,8
	E 0608H SCLDR/L 04	8	6	100	36	3,4								6,8


STEEL	A-SCUPR/L	d	d1	 (mm)		f	D _{min}					KG		STOCK	PRICELIST on getooling.com
				l1	l2										
	A 0608H SCUPR/L 05	8	6	100	20	4,5	8	CPMT CPGT 05T1...	VT22B	BT06	0,050				
	A 0810J SCUPR/L 05	10	8	110	26	6	11				0,070				
	A 1012K SCUPR/L 05	12	10	125	32	7	13				0,100				
A 1216M SCUPR/L 05	16	12	150	40	9	16	0,200								

CARBIDE	E-SCUPR/L	d	d1	 (mm)		f	D _{min}						STOCK	PRICELIST on getooling.com
				l1	l2						KG			
	E 0608H SCUPR/L 05	8	6	100	28	4,5	8	CPMT CPGT 05T1...	VT22B	BT06	0,050			
	E 0810J SCUPR/L 05	10	8	110	36	6	11				0,090			
	E 1012K SCUPR/L 05	12	10	125	44	7	13				0,170			
E 1216M SCUPR/L 05	16	12	150	55	9	16	0.300							

STEEL	A-SCXPR/L	d	d1	 (mm)		f	D _{min}						STOCK	PRICELIST on getooling.com
				l1	l2						KG			
	A 0608H SCXPR/L 05	8	6	100	20	4,5	8,5	CPMT CPGT 05T1...	VT22B	BT06	0,050			
	A 0810J SCXPR/L 05	10	8	110	26	6	11				0,070			
	A 1012K SCXPR/L 05	12	10	125	32	7	13				0,100			
A 1216M SCXPR/L 05	16	12	150	40	9	16	0.200							

CARBIDE	E-SCXPR/L	d	d1	 (mm)		f	D _{min}						STOCK	PRICELIST on getooling.com
				l1	l2						KG			
	E 0608H SCXPR/L 05	8	6	100	28	4,5	8,5	CPMT CPGT 05T1...	VT22B	BT06	0,050			
	E 0810J SCXPR/L 05	10	8	110	36	6	11				0,090			
	E 1012K SCXPR/L 05	12	10	125	44	7	13				0,170			
E 1216M SCXPR/L 05	16	12	150	55	9	16	0.300							



BARENI PER TORNITURA INTERNA BOHRSTANGEN FÜR DIE INNENBEARBEITUNG _ INTERNAL BORING BARS



STEEL	A-SDUCR/L	 (mm)										STOCK	PRICELIST on getooling.com										
	d	l1	l2	f	f1	Dmin																	
	A 0408F SDUCR/L 04	8	80	15	3	1,5								5,6	DCGT 04T0...	VT1604	BT05	0,030					
	A 0810H SDUCR/L 07	10	100	22,5	6,5	4,4								12,5				0,070					
	A 1012K SDUCR/L 07	12	125	27,5	9	5,9								15,5				DCMT DCGT 0702...	VT25B	BT08	0,100		
	A 1216M SDUCR/L 07	16	150	40,5	11	4,9								18							0,200		




HSS	AH-SDUCR/L																			STOCK	PRICELIST on getooling.com
	d	l1	l2	f	f1	Dmin				KG											
	AH 0810H SDUCR/L 07	10	100	22	7	5	12,5	DCMT DCGT 0702...	VT25B	BT08	0,070										
	AH 1012K SDUCR/L 07	12	125	28	9	5	15,5				0,100										
	AH 1216M SDUCR/L 07	16	150	36	11	5	19,5				0,200										

CARBIDE	E-SDUCR/L												STOCK	PRICELIST on getooling.com
	d	l1	l2	f	f1	Dmin								
	E 0408F SDUCR/L 04	8	80	26	3	1,5	5,6							



STEEL	A-SDQCR/L	 (mm)											STOCK	PRICELIST on getooling.com	
		d	l1	l2	f	f1	Dmin								
		A 0408F SDQCR/L 04	8	80	15	2,6	1,1								5,2
		A 0810H SDQCR/L 07	10	100	22,4	6,4	3								12,5
		A 1012K SDQCR/L 07	12	125	27,5	9	4								15,5
		A 1216M SDQCR/L 07	16	150	39,5	11	5								19,5
							DCGT 04T0...	VT1604	BT05	0,030					
							DCMT			0,070					
							DCGT	VT25B	BT08	0,100					
							0702...			0,200					

CARBIDE	E-SDQCR/L												STOCK	PRICELIST on getooling.com
	d	l1	l2	f	f1	Dmin								
	E 0408F SDQCR/L 04	8	80	26	2,6	1,1	5,2							

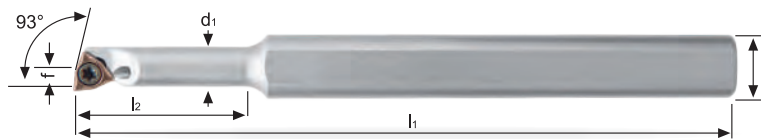


STEEL	A-SWUCR/L														STOCK	PRICELIST on getooling.com
	d	d1	l1	l2	f	Dmin										
	A 0508H SWUCR/L 02	8	5	100	18	2,9	5,8									
	A 0608H SWUCR/L 02	8	6	100	24	3,9	7,8									




HSS	AH-SWUCR/L													
	d	d1	l1 l2 (mm)		f	Dmin						STOCK	PRICELIST on getooling.com	
	AH 0508H SWUCR/L 02	8	5	100	18	2,9	5,8	WCMT			0,040			
AH 0608H SWUCR/L 02	8	6	100	24	3,9	7,8	WCGT 0201...	VT20B	BT06	0,050				

CARBIDE	E-SWUCR/L														STOCK	PRICELIST on getooling.com
	d	d1	l1 l2 (mm)		f	Dmin				KG						
	E 0508H SWUCR/L 02	8	5	100	24	2,9	5,8	WCMT	VT20B	BT06	0,040					
	E 0608H SWUCR/L 02	8	6	100	32	3.9	7.8	WCGT 0201...			0.050					


BARENI PER TORNITURA INTERNA
BOHRSTANGEN FÜR DIE INNENBEARBEITUNG _ INTERNAL BORING BARS



STEEL	A-SCLDR/L		d	l1 l2 (mm)		f	D _{min}				KG		STOCK	PRICELIST on getooling.com
	A 04E SCLDR/L 04		4	70	-	2,4	4,8	CDGT 0401...	VT18B	BT06	0,030			
	A 05E SCLDR/L 04		5	70	-	2,9	5,8				0,040			
	A 06F SCLDR/L 04		6	80	-	3,4	6,8				0,050			
CARBIDE	E-SCLDR/L		d	l1 l2 (mm)		f	D _{min}				KG		STOCK	PRICELIST on getooling.com
	E 04F SCLDR/L 04		4	80	-	2,4	4,8	CDGT 0401...	VT18B	BT06	0,030			
	E 05F SCLDR/L 04		5	80	-	2,9	5,8				0,040			
	E 06G SCLDR/L 04		6	95	-	3,4	6,8				0,050			


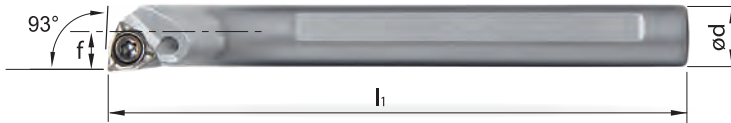



CARBIDE	E-SWUCR/L		d	l1 l2 (mm)		f	D _{min}				KG		STOCK	PRICELIST on getooling.com
	E 05F SWUCR/L 02		5	85	-	2,9	5,8	WCMT WCGT 0201...	VT20B	BT06	0,040			
	E 06G SWUCR/L 02		6	95	-	3,9	7,8				0,050			






MINI COLLET		Ød	ØD	L L1 (mm)		H	KG		STOCK	PRICELIST on getooling.com
SC 04-16		4	16	80	6	15	0,010	--		
SC 05-16		5					0,010	--		
SC 06-16		6					0,010	--		

BARENI PER TORNITURA INTERNA BOHRSTANGEN FÜR DIE INNENBEARBEITUNG _ INTERNAL BORING BARS

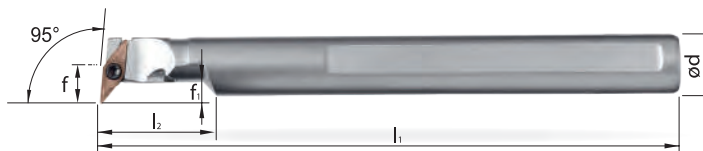

STEEL	A-SVLCR/L	d	l1	 (mm)		f	f1	Dmin						STOCK	PRICELIST on getooling.com
	A 08F SVLCR/L 05	8	80	15	5	3	9,2	VCGT 0501...	VT1604	BT05	0,040				
	A 10H SVLCR/L 07	10	100	22	7	5	12,5	VCMT VCGT 0702...			0,080				
	A 12K SVLCR/L 07	12	125	28	9	6	15,5				0,120				
	A 16M SVLCR/L 07	16	150	36	11	5	19,5				0,250				




CARBIDE	E-SVLCR/L	d	l1	l2	f	f1	Dmin						STOCK	PRICELIST on getooling.com
	 (mm)													
	E 08F SVLCR/L 05	8	80	26	5	3	9,2	VCGT 0501...	VT1604	BT05	0,070		●	
	E 10H SVLCR/L 07	10	100	32	7	5	12,5	VCMT VCGT 0702...			0,170		●	
	E 12K SVLCR/L 07	12	125	40	9	6	15,5				0,300		●	
	E 16M SVLCR/L 07	16	150	55	11	5	19,5				0,500		●	

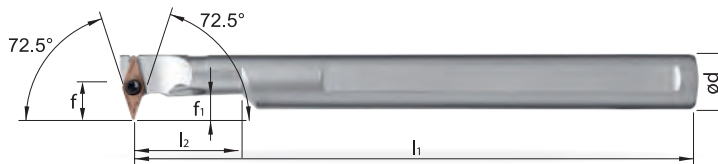

STEEL	A-SVVCr/L	d	l1	 (mm)			f1	D _{min}						STOCK	PRICELIST on getooling.com
	A 08F SVVCr/L 05	8	80	15	5,5	3,5	10,2	VCGT 0501...	VT1604	BT05	0,040		●		
	A 10H SVVCr/L 07	10	100	22	8	6	13,5	VCMT VCGT 0702...	VT20	BT06	0,080		●		
	A 12K SVVCr/L 07	12	125	28	9	6	15,5				0,120		●		
	A 16M SVVCr/L 07	16	150	36	11	6	19,5				0,250		●		
	A 16M SVVCr/L 11	16	150	40	13,9	9,5	23	VCMT VCGT 1103...	VT25B	BT08	0,250		●		
	A 20Q SVVCr/L 11	20	180	50	13,9	9,5	25				0,400		●		
	A 25R SVVCr/L 16	25	200	62,5	19,9	13	34				VCMT VCGT 1604...	VT40B	BT15	0,690	



CARBIDE	E-SVVCr/L	d	l1	l2	f	f1	Dmin						STOCK	PRICELIST on getooling.com
	 (mm)													
	E 08F SVVCr/L 05	8	80	26	5,5	3,5	10,2	VCGT 0501...	VT1604	BT05	0,070		●	
	E 10H SVVCr/L 07	10	100	32	8	6	13,5	VCMT VCGT 0702...			0,170		●	
	E 12K SVVCr/L 07	12	125	40	9	6	15,5				0,300		●	
E 16M SVVCr/L 07	16	150	55	11	6	19,5	0,500					●		

BARENI PER TORNITURA INTERNA BOHRSTANGEN FÜR DIE INNENBEARBEITUNG _ INTERNAL BORING BARS

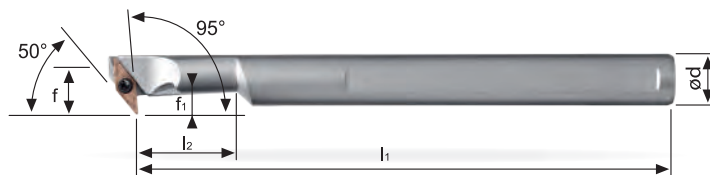



STEEL	A-SV95CR/L												STOCK	PRICELIST on getooling.com
	d	l1	l2	f	f1	Dmin								
	8	80	15	5	3	9,2								
	10	100	22	7	5	12,5								
	12	125	28	9	6	15,5								

CARBIDE	E-SV95CR/L												STOCK	PRICELIST on getooling.com
	d	l1	l2	f	f1	Dmin								
	8	80	26	5	3	9,2								
	10	100	32	7	5	12,5								
	12	125	40	9	6	15,5								

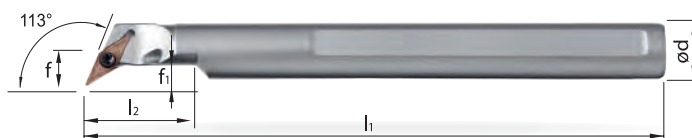

STEEL	A-SVXCR/L												STOCK	PRICELIST on getooling.com
	d	l1	l2	f	f1	Dmin								
	8	80	15	5	3	9,2								
	10	100	22	7	3	12,5								
	12	125	28	9	3	15,5								

CARBIDE	E-SVXCR/L												STOCK	PRICELIST on getooling.com
	d	l1	l2	f	f1	Dmin								
	8	80	26	5	3	9,2								
	10	100	32	7	3	12,5								
	12	125	40	9	3	15,5								


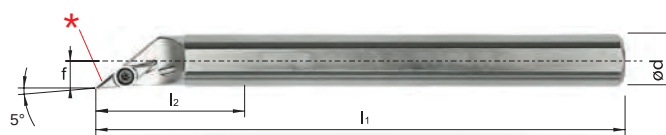


STEEL	A-SVOCR/L										STOCK	PRICELIST on getooling.com							
	d	l1	l2	f	Dmin														
	A 08F SVOCR/L 05	8	80	15	3								8,0	VCGT 0501...	VT1604	BT05	0,040		
	A 10H SVOCR/L 07	10	100	22	5,5								13	VCMT VCGT	VT20	BT06	0,080		
	A12L SVOCR/L 07	12	140	28	6,5								13	0702...			0,140		
	A16M SVOCR/L 11	16	150	36	9								22	VCMT VCGT	VT25B	BT08	0,250		
A20Q SVOCR/L 11	20	180	40	11	24	1103...	0,500												

CARBIDE	E-SVOCR/L											STOCK	PRICELIST on getooling.com
	d	l1	l2	f	Dmin								
	E 08F SVOCR/L 05	8	80	26	3	8,0	VCMT 0501...	VT1604	BT05	0,050			
	E 10H SVOCR/L 07	10	100	32	5,5	11	VCMT VCMT 0702...	VT20	BT06	0,100			



* ATTENZIONE: non usare il tagliente secondario per la lavorazione!
ACHTUNG: Sekundärschneide nicht für Bearbeitung geeignet! _ CAUTION: Do not use secondary cutting edge for machining!

BARENI PER TORNITURA INTERNA BOHRSTANGEN FÜR DIE INNENBEARBEITUNG _ INTERNAL BORING BARS



STEEL	A-SVJBR/L										STOCK	PRICELIST on getooling.com	
	d	l1	l2	f	Dmin								
	A 16M SVJBR/L 11	16	150	31,4	2	22	VBMT VBGT 1103...	VT25B	BT08	0,250			
	A 20Q SVJBR/L 11	20	180	38	2	24				0,500			
	A 25R SVJBR/L 16	25	200	44	4,6	28	VBMT VBGT 1604...	VT40B	BT15	0,700			

CARBIDE	E-SVJBR/L	d			f	Dmin						STOCK	PRICELIST on getooling.com
			l1	l2									
	E16R SVJBR/L 11	16	200	31,4	2	22	VBMT VBGT 1103...	VT25B	BT08	0,500			
	E20S SVJBR/L 11	20	250	38	2	24				1,000			
E25S SVJBR/L 16	25	250	44	4,6	28	VBMT VBGT 1604...	VT40B	BT15	1,800				





STEEL	A-SVJCR/L	d	 (mm)		f	Dmin						STOCK	PRICELIST on getooling.com
	A 08F SVJCR/L 05	8	80	15	3	8	VCGT 0501...	VT1604	BT05	0,040			
	A 10K SVJCR/L 07	10	125	18	1,5	13	VCMT VCGT	VT20	BT06	0,080			
	A 12L SVJCR/L 07	12	140	18	2	13	0702...			0,120			
	A 16M SVJCR/L 11	16	150	31,4	2	22	VCMT VCGT	VT25B	BT08	0,250			
	A 20Q SVJCR/L 11	20	180	38	2	24	1103...			0,500			
	A 25R SVJCR/L 16	25	200	44	4,6	28	VCMT VCGT	VT40B	BT15	0,700			
							1604...						

HSS	AH-SVJCR/L												
	d				D _{min}						STOCK	PRICELIST on getooling.com	
		l1	l2	f									
	AH 16M SVJCR/L 11	16	150	30	4,6	22	VCMT VCGT 1103...	VT25B	BT08	0,250		●	
	AH 20Q SVJCR/L 11	20	180	38	4,6	25				0,500		●	
	AH 25R SVJCR/L 16	25	200	44	4,6	28	VCMT VCGT 1604...	VT40B	BT15	0,700		●	

CARBIDE	E-SVJCR/L	d	↔ l1 l2 (mm)	f	Dmin						STOCK	PRICELIST on getooling.com	
	E08F SVJCR/L 05	8	80	26	3	8	VCGT 0501...	VT1604	BT05	0,050			
	E10K SVJCR/L 07	10	125	18	1,5	13	VCMT VCGT 0702...	VT20	BT06	0,170			
	E12M SVJCR/L 07	12	150	18	2	13				0,300			
	E16R SVJCR/L 11	16	200	31,4	2	22	VCMT VCGT 1103...	VT25B	BT08	0,500			
	E20S SVJCR/L 11	20	250	38	2	24				1,000			
	E25S SVJCR/L 16	25	250	44	4,6	28	VCMT VCGT 1604...	VT40B	BT15	1,800			

BARENI PER TORNITURA INTERNA BOHRSTANGEN FÜR DIE INNENBEARBEITUNG _ INTERNAL BORING BARS


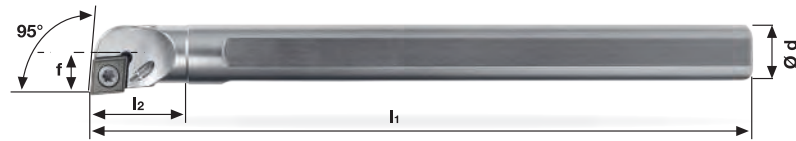


STEEL	A-SCLCR/L	d	l (mm)				Dmin											
			l1	l2	f													
	A 08H SCLCR/L 06	8	100	17,8	6	10												
	A 10K SCLCR/L 06	10	125	17,7	7	12	CCMT CCGT 0602...	--	--	VT25B	BT08	0,080						
	A 12L SCLCR/L 06	12	140	24,2	9	16						0,140						
	A 16Q SCLCR/L 09	16	180	26,7	11	20	CCMT CCGT 09T3...	--	--	VT40B	BT15	0,250						
	A 20R SCLCR/L 09	20	200	36,7	13	25						0,500						
	A 25R SCLCR/L 12	25	200	40	17	32	CCMT CCGT 1204...	--	--	VT50	BT20	0,700						
	A 32S SCLCR/L 12	32	250	30	22	40						1,400						
	A 40T SCLCR/L 12	40	300	31,4	27	49		US1221	GBS1221	SS1221	BT15	2,700						

HSS	AH-SCLCR/L	d	l (mm)				Dmin											
			l1	l2	f													
	AH 0410H SCLCR/L 03	10	100	24	2,5	5	CCGT 0301...	--	--	VT16	BT06	0,030						
	AH 0610H SCLCR/L 03	10	100	32	3,5	7						0,040						
	AH 08K SCLCR/L 06	8	125	20	5	10	CCMT CCGT 0602...	--	--	VT25B	BT08	0,080						
	AH 12M SCLCR/L 06	12	150	20	7	14						0,120						
	AH 16Q SCLCR/L 09	16	180	27	9	18	CCMT CCGT 09T3...	--	--	VT40B	BT15	0,250						
	AH 20R SCLCR/L 09	20	200	27	11	23						0,500						
	AH 25R SCLCR/L 12	25	200	40	15,5	28	CCMT CCGT 1204...	--	--	VT50	BT20	0,700						

CARBIDE	E-SCLCR/L	d	l (mm)				Dmin											
			l1	l2	f													
	E 04G SCLCR/L 03	4	90	10	2,5	5				VT16		0,030						
	E 05H SCLCR/L 03	5	100	10	3	6	CCGT 0301...	--	--	BFTX 01604N	BT06	0,040						
	E 06J SCLCR/L 03	6	110	10	3,5	7						0,050						
	E 08K SCLCR/L 06	8	125	10	5	10						0,090						
	E 10K SCLCR/L 06	10	125	10	6	12	CCMT CCGT 0602...	--	--	VT25B	BT08	0,170						
	E 12M SCLCR/L 06	12	150	10	8	14						0,300						
	E 16R SCLCR/L 09	16	200	16	10	18	CCMT CCGT 09T3...	--	--	VT40B	BT15	0,500						
	E 20S SCLCR/L 09	20	250	16	12	23						1,000						
	E 25S SCLCR/L 12	25	250	16	15	30	CCMT CCGT 1204...	--	--	VT50	BT20	1,800						
	E 32U SCLCR/L 12	32	350	26	22	39		US1221	GBS1221	SS1221	BT15	3,700						

BARENI PER TORNITURA INTERNA BOHRSTANGEN FÜR DIE INNENBEARBEITUNG _ INTERNAL BORING BARS



A-SDUCR/L

	d	l1	l2	f	Dmin							KG		STOCK	PRICELIST on getooling.com
A 10K SDUCR/L 07	10	125	15,6	7	13,5							0,080		●	
A 12L SDUCR/L 07	12	140	22,6	9	16	DCMT DCGT 0702...	--	--	VT25B	BT08		0,120		●	
A 16Q SDUCR/L 07	16	180	27	11	20							0,250		●	
A 20R SDUCR/L 11	20	200	33,8	13	25	DCMT DCGT 11T3...	--	--	VT40B	BT15		0,500		●	
A 25R SDUCR/L 11	25	200	35,8	17	32							0,700		●	
A 32S SDUCR/L 11	32	250	18,5	22	40	DCMT DCGT 11T3...	US2311	GBS1111	SS1111	BT20		1,400		●	
A 40T SDUCR/L 11	40	300	18,5	27	49							2,700		●	


AH-SDUCR/L

	d	l1	l2	f	Dmin							KG		STOCK	PRICELIST on getooling.com
AH 08K SDUCR/L 07	8	125	20	7,5	12							0,040		●	
AH 10K SDUCR/L 07	10	125	20	9	14	DCMT DCGT 0702...	--	--	VT25B	BT08		0,080		●	
AH 12M SDUCR/L 07	12	150	25	8	16							0,120		●	
AH 16Q SDUCR/L 07	16	180	25	10	20							0,250		●	
AH 20R SDUCR/L 11	20	200	30	13	26	DCMT DCGT 11T3...	--	--	VT40B	BT15		0,500		●	
AH 25R SDUCR/L 11	25	200	40	16	32							0,700		●	

E-SDUCR/L

	d	l1	l2	f	Dmin							KG		STOCK	PRICELIST on getooling.com
E 08K SDUCR/L 07	8	125	10	7,5	12,5							0,090		●	
E 10K SDUCR/L 07	10	125	10	7	12,5	DCMT DCGT 0702...	--	--	VT25B	BT08		0,170		●	
E 12M SDUCR/L 07	12	150	12,5	9	15							0,300		●	
E 16R SDUCR/L 07	16	200	16,5	11	19							0,500		●	
E 20S SDUCR/L 11	20	250	20,5	12,5	23,5	DCMT DCGT 11T3...	--	--	VT40B	BT15		1,000		●	
E 25S SDUCR/L 11	25	250	26	16	32							1,800		●	



BARENI PER TORNITURA INTERNA BOHRSTANGEN FÜR DIE INNENBEARBEITUNG _ INTERNAL BORING BARS



STEEL	A-SDQCR/L	d	l1	l2	f	Dmin												
	A 10K SDQCR/L 07	10	125	16	7	14												
	A 12L SDQCR/L 07	12	140	20	9	17	DCMT DCGT 0702...	--	--	VT25B	BT08	0,120	●					
	A 16Q SDQCR/L 07	16	180	25	11	22						0,250	●					
	A 20R SDQCR/L 11	20	200	32	13	26	DCMT DCGT 11T3...	--	--	VT40B	BT15	0,500	●					
	A 25R SDQCR/L 11	25	200	40	17	31,5						0,700	●					
	A 32S SDQCR/L 11	32	250	33,5	22	40	DCMT DCGT 11T3...	US2311	GBS1111	SS1111	BT15	1,400	●					
	A 40T SDQCR/L 11	40	300	50	27	49						2,700	●					


HSS	AH-SDQCR/L	d	l1	l2	f	Dmin												
	AH 08K SDQCR/L07	8	125	20	8	12						0,040	●					
	AH 10K SDQCR/L07	10	125	20	7	13	DCMT DCGT 0702...	--	--	VT25B	BT08	0,080	●					
	AH 12M SDQCR/L 07	12	150	20	8,5	16						0,120	●					
	AH 16Q SDQCR/L 07	16	180	30	10	20						0,250	●					
	AH 20R SDQCR/L 11	20	200	40	12,5	25	DCMT DCGT 11T3...	--	--	VT40B	BT15	0,500	●					
	AH 25R SDQCR/L 11	25	200	40	16	32						0,700	●					

CARBIDE	E-SDQCR/L	d	l1	l2	f	Dmin												
	E 08K SDQCR/L 07	8	125	10	7	12						0,090	●					
	E 10K SDQCR/L 07	10	125	10	7	13	DCMT DCGT 0702...	--	--	VT25B	BT08	0,170	●					
	E 12M SDQCR/L 07	12	150	12,5	8,5	16						0,300	●					
	E 16R SDQCR/L 07	16	200	16,5	10	20						0,500	●					
	E 20S SDQCR/L 11	20	250	13	12,5	25	DCMT DCGT 11T3...	--	--	VT40B	BT15	1,000	●					
	E 25S SDQCR/L 11	25	250	17	16	32						1,800	●					

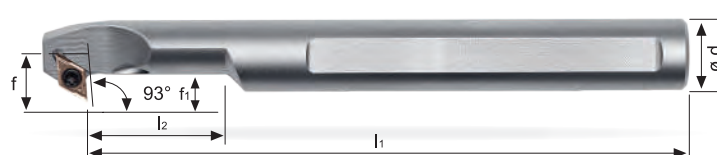

STEEL	A-SDXCR/L	d	l1	l2	f	f1	Dmin											
	A 08F SDXCR/L 04	8	80	15	5	3	9,20	DCGT 04T0...	--	--	VT1604	BT05	0,040	●				
	A 10H SDXCR/L 04	10	100	22	7	5	12,50					0,060	●					
	A 12L SDXCR/L 07	12	140	25	9	4,3	17	DCMT DCGT 0702...	--	--	VT25B	BT08	0,120	●				
	A 16Q SDXCR/L 07	16	180	33	11	4,3	21					0,300	●					
	A 20R SDXCR/L 11	20	200	40	13		25	DCMT DCGT 11T3...	--	--	VT40B	BT15	0,460	●				
	A 25R SDXCR/L 11	25	200	50	17		31,5					0,740	●					

BARENI PER TORNITURA INTERNA BOHRSTANGEN FÜR DIE INNENBEARBEITUNG _ INTERNAL BORING BARS





STEEL	A-STFCR/L	d	l1	l2	f	Dmin												
	A 10K STFCR/L 11	10	125	22,8	7	13										0,080		●
	A 12L STFCR/L 11	12	140	26,5	9	16	TCMT TCGT 1102...	--	--	VT25B	BT08					0,120		●
	A 16Q STFCR/L 11	16	180	26,7	11	20										0,250		●
	A 20R STFCR/L 16	20	200	36,6	13	25	TCMT TCGT 16T3...	--	--	VT40B	BT15					0,500		●
	A 25R STFCR/L 16	25	200	41	17	32										0,700		●
	A 32S STFCR/L 16	32	250	34,6	21,9	40	TCMT TCGT 16T3...	US5511	GBS1111	SS1111	BT15					1,400		●
	A 40T STFCR/L 16	40	300	37,5	27	49										2,700		●

HSS	AH-STFCR/L	d	l1	l2	f	Dmin												
	AH 10K STFCR/L 11	10	125	16	7	12										0,080		●
	AH 12M STFCR/L 11	12	150	20	9	14	TCMT TCGT 1102...	--	--	VT25B	BT08					0,120		●
	AH 16Q STFCR/L 11	16	180	25	11	18										0,250		●
	AH 20R STFCR/L 11	20	200	32	13	23										0,500		●
	AH 25R STFCR/L 16	25	200	40	17	28	TCMT TCGT 16T3...	--	--	VT40B	BT15					0,700		●

CARBIDE	E-STFCR/L	d	l1	l2	f	Dmin												
	E 10K STFCR/L 11	10	125	16	6	12										0,170		●
	E 12M STFCR/L 11	12	150	20	8	15	TCMT TCGT 1102...	--	--	VT25B	BT08					0,300		●
	E 16R STFCR/L 11	16	200	25	10	19										0,500		●
	E 20S STFCR/L 16	20	250	32	12	24	TCMT TCGT 16T3...	--	--	VT40B	BT15					1,000		●
	E 25S STFCR/L 16	25	250	40	13,5	27										1,800		●

BARENI PER TORNITURA INTERNA BOHRSTANGEN FÜR DIE INNENBEARBEITUNG _ INTERNAL BORING BARS

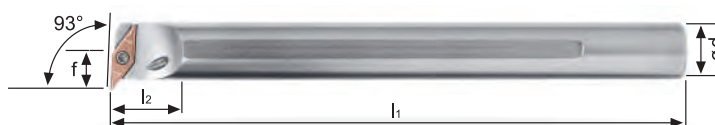



STEEL	A-SVUBR/L		i (mm)															
	d	l1	l2	f	Dmin													
	A 16Q SVUBR/L 11	16	180	16,5	11	21	VBMT											
	A 20R SVUBR/L 11	20	200	20,5	13	24	VBGT											
	A 25R SVUBR/L 16	25	200	25,5	17	32	VBMT											
	A 32S SVUBR/L 16	32	250	33,5	22	40	VBGT											

CARBIDE	E-SVUBR/L		i (mm)															
	d	l1	l2	f	Dmin													
	E 16R SVUBR/L 11	16	200	16,5	11	21	VBMT											
	E 20S SVUBR/L 11	20	250	20,5	13	25	VBGT											

STEEL	A-SVUCR/L		i (mm)															
	d	l1	l2	f	Dmin													
	A 16Q SVUCR/L 11	16	180	16,5	11	21	VCMT											
	A 20R SVUCR/L 11	20	200	20,5	13	25	VCGT											
	A 25R SVUCR/L 16	25	200	25,5	17	32	VCMT											
	A 32S SVUCR/L 16	32	250	33,5	22	40	VCGT											

HSS	AH-SVUCR/L		i (mm)															
	d	l1	l2	f	Dmin													
	AH 16Q SVUCR/L 11	16	180	20	11	21	VCMT											
	AH 20R SVUCR/L 11	20	200	24	13	25	VCGT											

CARBIDE	E-SVUCR/L		i (mm)															
	d	l1	l2	f	Dmin													
	E 16R SVUCR/L 11	16	200	16,5	11	21	VCMT											
	E 20S SVUCR/L 11	20	250	20,5	13	25	VCGT											

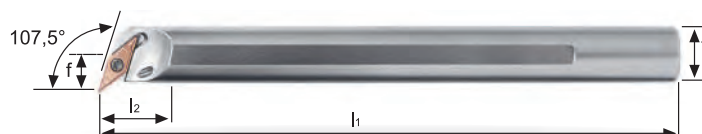

STEEL	A-SVQBR/L		i (mm)															
	d	l1	l2	f	Dmin													
	A 16Q SVQBR/L 11	16	180	16,5	11	21	VBMT											
	A 20R SVQBR/L 11	20	200	20,5	13	25	VBGT											

STEEL	A-SVQCR/L		i (mm)															
	d	l1	l2	f	Dmin													
	A 16Q SVQCR/L 11	16	180	16,5	11	21	VCMT											
	A 20R SVQCR/L 11	20	200	26,1	13	24	VCGT											
	A 25R SVQCR/L 16	25	200	43	17	31,5	VCMT											
	A 32S SVQCR/L 16	32	250	33,5	22	40	VCGT											

BARENI PER TORNITURA INTERNA BOHRSTANGEN FÜR DIE INNENBEARBEITUNG _ INTERNAL BORING BARS

Specialmente con diametri di lavorazione di piccole dimensioni, i bareni N-PREMIUM impediscono l'accumulo di trucioli nel pezzo.

Speziell bei kleinen Bearbeitungsdurchmessern, verhindern N-PREMIUM Bohrstangen einen Spänestau im Werkstück.

Especially with small machining diameters, N-PREMIUM boring bars prevent chips jamming in the workpiece.

Asportazione sicura dei trucioli mediante scanalature a spirale.
Gesicherte Spanabfuhr durch spiralisierten Spanraum.


Reliable chip evacuation due to spiral flutes.





STANDARD



N-PREMIUM

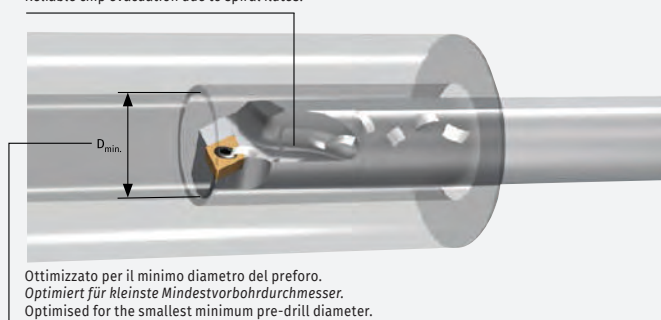



Ottimizzato per il minimo diametro del preforo.
Optimiert für kleinste Mindestvorbohrdurchmesser.
Optimised for the smallest minimum pre-drill diameter.

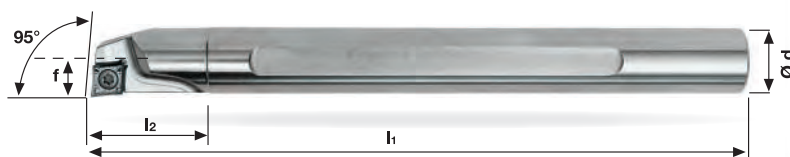

Stelo in acciaio _ Stahlschaft _ Steelshank

N-PREMIUM A-SCLCR/L

	d	l1	l2	f	D _{min}						KG		STOCK	PRICELIST on getooling.com
A08H SCLCR/L 06 N-PREMIUM	8	100	20	5	10						0,040		●	
A10K SCLCR/L 06 N-PREMIUM	10	125	20	6	12	CCMT CCGT 0602...	--	--	VT25B	BT08	0,080		●	
A12L SCLCR/L 06 N-PREMIUM	12	140	24,2	7	14						0,140		●	
A16Q SCLCR/L 09 N-PREMIUM	16	180	31	9	18						0,250		●	
A20R SCLCR/L 09 N-PREMIUM	20	200	36	11	22	CCMT CCGT 09T3...	--	--	VT40B	BT15	0,500		●	
A25R SCLCR/L 09 N-PREMIUM	25	200	43	13,5	27						0,700		●	
A25R SCLCR/L 12 N-PREMIUM	25	200	43	13,5	27	CCMT CCGT 1204...	--	--	VT50	BT20	0,700		●	

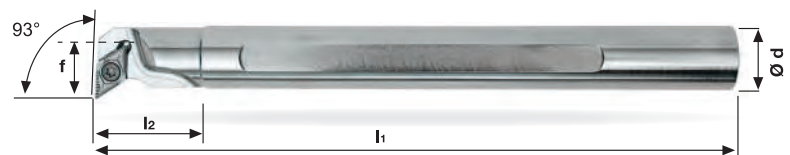


Stelo in acciaio _ Stahlschaft _ Steelshank

N-PREMIUM A-SDUCR/L




	d	l1	l2	f	D _{min}						KG		STOCK	PRICELIST on getooling.com
A10K SDUCR/L 07 N-PREMIUM	10	125	20	7	13						0,080		●	
A12L SDUCR/L 07 N-PREMIUM	12	140	25	8	15	DCMT DCGT 0702...	--	--	VT25B	BT08	0,120		●	
A16Q SDUCR/L 07 N-PREMIUM	16	180	28	10	19						0,250		●	
A16Q SDUCR/L 11 N-PREMIUM	16	180	28	14	23						0,250		●	
A20R SDUCR/L 11 N-PREMIUM	20	200	36	13	25	DCMT DCGT 11T3...	--	--	VT40B	BT15	0,500		●	
A25R SDUCR/L 11 N-PREMIUM	25	200	40	16	31						0,700		●	

BARENI PER TORNITURA INTERNA BOHRSTANGEN FÜR DIE INNENBEARBEITUNG _ INTERNAL BORING BARS





Stelo in acciaio _ Stahlschaft _ Steelshank

N-PREMIUM A-SDQCR/L	d	l1	l2	f	D _{min}							KG		STOCK	PRICELIST on getooling.com
A10K SDQCR/L 07 N-PREMIUM	10	125	20	7	13							0,080		●	
A12L SDQCR/L 07 N-PREMIUM	12	140	25	8	15	DCMT DCGT 0702...	--	--	VT25B	BT08		0,120		●	
A16Q SDQCR/L 07 N-PREMIUM	16	180	28	10	19							0,250		●	
A16Q SDQCR/L 11 N-PREMIUM	16	180	28	14	23	DCMT DCGT 11T3...	--	--	VT40B	BT15		0,250		●	
A20R SDQCR/L 11 N-PREMIUM	20	200	36	13	25							0,500		●	
A25R SDQCR/L 11 N-PREMIUM	25	200	40	16	31							0,700		●	



Stelo in acciaio _ Stahlschaft _ Steelshank

N-PREMIUM A-STFCR/L	d	l1	l2	f	D _{min}							KG		STOCK	PRICELIST on getooling.com
A10K STFCR/L 11 N-PREMIUM	10	125	22	6	12							0,080		●	
A12L STFCR/L 11 N-PREMIUM	12	140	24,3	7	14	TCMT TCGT 1102...	--	--	VT25B	BT08		0,120		●	
A16Q STFCR/L 11 N-PREMIUM	16	180	31	9	18							0,250		●	
A20R STFCR/L 11 N-PREMIUM	20	200	36	11	22							0,500		●	




Stelo in acciaio _ Stahlschaft _ Steelshank

N-PREMIUM A-SVUBR/L	d	l1	l2	f	D _{min}							KG		STOCK	PRICELIST on getooling.com
A16Q SVUBR/L 11 N-PREMIUM	16	180	31	11	20	VBMT VBGT 1103...	--	--	VT25B	BT08		0,250		●	
A20R SVUBR/L 11 N-PREMIUM	20	200	36	13	24							0,500		●	
A25R SVUBR/L 16 N-PREMIUM	25	200	40	17	31	VBMT VBGT 1604...	--	--	VT40B	BT15		0,700		●	




N-PREMIUM A-SVUCR/L	d	l1	l2	f	D _{min}							KG		STOCK	PRICELIST on getooling.com
A16Q SVUCR/L 11 N-PREMIUM	16	180	31	11	20	VCMT VCGT 1103...	--	--	VT25B	BT08		0,250		●	
A20R SVUCR/L 11 N-PREMIUM	20	200	36	13	24							0,500		●	
A25R SVUCR/L 16 N-PREMIUM	25	200	40	17	31	VCMT VCGT 1604...	--	--	VT40B	BT15		0,700		●	

GAMBI IN METALLO DURO INTEGRALE _VHM SCHAFTEN _ SOLID CARBIDE SHANKS




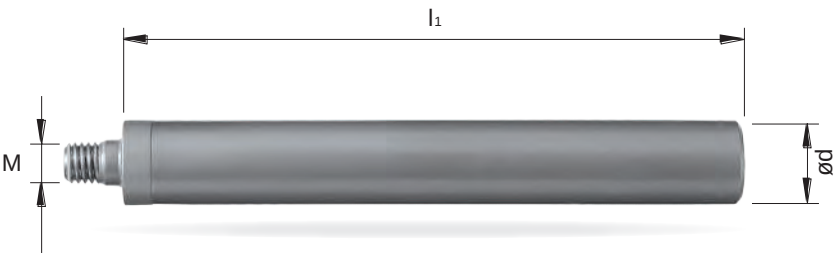


CARBIDE	E..K	d	l1 (mm)	M	KG		STOCK	PRICELIST on getooling.com
	E08K M4 R	8	112	M4	0,070			
	E10K M5 R	10	112	M5	0,110			
	E12M M6 R	12	137	M6	0,180			
	E16R M8 R	16	177	M8	0,500			

TESTINA FILETTATA _ KÖPFE MIT GEWINDE _ HEADS WITH THREAD CONNECTION




STEEL	A-SLCR	d	l1 (mm)	f	W	Dmin				KG		STOCK	PRICELIST on getooling.com
	A 08 SLCR 06	8	21	5	3,5	10				0,008			
	A 10 SLCR 06	10	22	6	3,5	12	CCMT CCGT 0602...	VT25B	BT08		0,010		
	A 12 SLCR 06	12	23	7	3,5	16			CBH 0816	0,014			
	A 16 SLCR 09	16	26	9	3,5	20	CCMT CCGT 09T3 ...	VT40B	BT15		0,030		



STEEL	A-SDUCR	d	l1 (mm)	f	W	Dmin				KG		STOCK	PRICELIST on getooling.com
	A 08 SDUCR 07	8	21	9	3,5	13				0,008			
	A 10 SDUCR 07	10	22	9	3,5	14	DCMT DCGT 0702...	VT25B	BT08	CBH 0816	0,010		
	A 12 SDUCR 07	12	23	10	3,5	16				0,014			
	A 16 SDUCR 07	16	26	11,3	3,5	20				0,030			

TESTINA FILETTATA _ KÖPFE MIT GEWINDE _ HEADS WITH THREAD CONNECTION

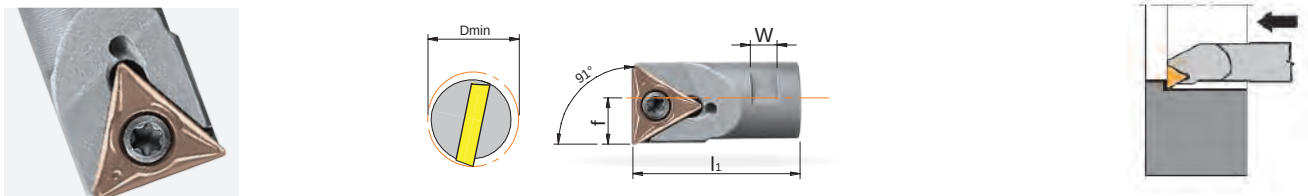

STEEL	A-STFCR	d	(mm)												
			l1	f	W	Dmin									
	A 08 STFCR 08	8	21	5	3,5	10	TCMT 0802...	VT20	BT06			0,008			
	A 10 STFCR 11	10	22	6	3,5	12	TCMT TCGT 1102...	VT25B	BT08	CBH 0816		0,010			
	A 12 STFCR 11	12	23	7	3,5	14						0,014			
A 16 STFCR 11	16	26	9	3,5	18							0,030			





SET BARENO MD + TESTINE
VHM SCHAFT + EINSCHRAUBEN-KÖPFEN SATZ
CARBIDE SHANK + HEADS WITH THREAD CONNECTION SET

PROFI-BOX SC06.SD07.ST08															
		n° 1		E08K M4 R											
		n° 1		A08 SCLCR 06											
		n° 1		A08 SDUCR 07											
		n° 1		A08 STFCR 08											
		n° 1		E10K M5 R											
		n° 1		A10 SCLCR 06											
		n° 1		A10 SDUCR 07											
		n° 1		A10 STFCR 11											
		n° 1		E12M M6 R											
		n° 1		A12 SCLCR 06											
		n° 1		A12 SDUCR 07											
		n° 1		A12 STFCR 11											

UTENSILI PER TORNITURA ESTERNA KLEMMHALTER FÜR DIE AUSSENBEARBEITUNG _ EXTERNAL TURNING TOOLS

Con lubrificazione _ Mit Innenkühlung _ With coolant

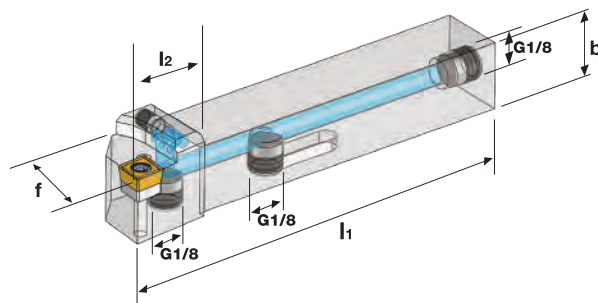

INCLUDING FREE
NO SEPARATE SALE

Stelo in acciaio _ Stahlschaft _ Steelshank

SCLCR/L

h1 h2 b l1 l2 f (mm)



STOCK
PRICELIST on
getooling.com

SCLCR/L 1616 H09 IK G1/8

16 16 16 100 17 20

CCMT
CCGT
09T3...

US
1111E

GB-
S1111E

SS1111

BT15

0,235



SCLCR/L 2020 K09 IK G1/8

20 20 20 125 17 25

0,420



SCLCR/L 2525 M12 IK G1/8

25 25 25 150 20 32

CCMT
CCGT
1204...




US
1221E

GBS
1221E

SS1221

BT15

0,770

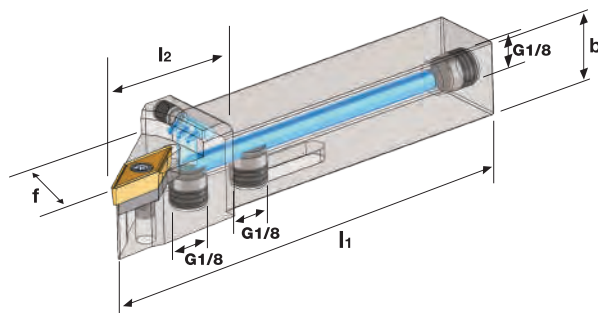

INCLUDING FREE
NO SEPARATE SALE

Stelo in acciaio _ Stahlschaft _ Steelshank

SDJCR/L

h1 h2 b l1 l2 f (mm)



STOCK
PRICELIST on
getooling.com

SDJCR/L 1616 H11 IK G1/8

16 16 16 100 20 20

0,230



SDJCR/L 2020 K11 IK G1/8

20 20 20 125 24 25

DCMT
DCGT
11T3...

US
2311E

GBS
1111E

SS1111

BT15

0,408





SDJCR/L 2525 M11 IK G1/8

25 25 25 150 27 32

0,735



UTENSILI PER TORNITURA ESTERNA **KLEMMHALTER FÜR DIE AUSSENBEARBEITUNG _ EXTERNAL TURNING TOOLS** Con lubrificazione _ Mit Innenkühlung _ With coolant


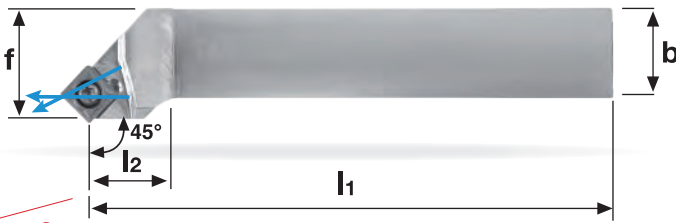

INCLUDING FREE NO SEPARATE SALE

Stelo in acciaio _ Stahlschaft _ Steelshank

SSSCR/L

	h1	h2	b	l1	l2	f	SCMT	SCGT	US	GBS	SS	BT	KG	STOCK	PRICELIST on getooling.com
SSSCR/L 1616 H09 IK G1/8	16	16	16	100	20	20	SCMT 09T3...		US4111	GBS1111	SS1111	BT15	0,235	●	
SSSCR/L 2020 K09 IK G1/8	20	20	20	125	20	25							0,420	●	
SSSCR/L 2525 M12 IK G1/8	25	25	25	150	25	32	SCMT SCGT 1204...		US4221	GBS1221	SS1221	BT15	0,770	●	

SSSCR/L 1616 H09 IK G1/8	16	16	16	100	20	20	SCMT 09T3...	US4111	GBS1111	SS1111	BT15	0,235	●
SSSCR/L 2020 K09 IK G1/8	20	20	20	125	20	25						0,420	●
SSSCR/L 2525 M12 IK G1/8	25	25	25	150	25	32	SCMT SCGT 1204...	US4221	GBS1221	SS1221	BT15	0,770	●

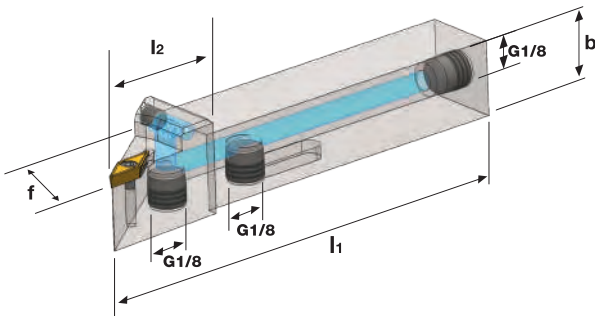INCLUDING FREE NO SEPARATE SALE



Stelo in acciaio _ Stahlschaft _ Steelshank

SVJCR/L

	h1	h2	b	l1	l2	f	VCMT	VCGT	US	GBS	SS	BT	KG	STOCK	PRICELIST on getooling.com
SVJCR/L 1616 H11 IK G1/8	16	16	16	100	21,5	20	VCMT VCGT 1103...		--	--	SS1751	BT08	0,203	●	
SVJCR/L 2020 K11 IK G1/8	20	20	20	125	23	25							0,373	●	
SVJCR/L 2020 K16 IK G1/8	20	20	20	125	29,5	25	VCMT VCGT 1604...		US 6522E	GBS 1111E	SS1111	BT15	0,380	●	
SVJCR/L 2525 M16 IK G1/8	25	25	25	150	32,5	32							0,677	●	




SVJCR/L 1616 H11 IK G1/8	16	16	16	100	21,5	20	VCMT VCGT 1103...	--	--	SS1751	BT08	0,203	●
SVJCR/L 2020 K11 IK G1/8	20	20	20	125	23	25						0,373	●
SVJCR/L 2020 K16 IK G1/8	20	20	20	125	29,5	25	VCMT VCGT 1604...	US 6522E	GBS 1111E	SS1111	BT15	0,380	●
SVJCR/L 2525 M16 IK G1/8	25	25	25	150	32,5	32						0,677	●

UTENSILI PER TORNITURA ESTERNA KLEMMHALTER FÜR DIE AUSSENBEARBEITUNG _ EXTERNAL TURNING TOOLS






Stelo in acciaio _ Stahlschaft _ Steelshank

SCLCR/L	h1	h2	b	l1	l2	f						KG		STOCK	PRICELIST on getooling.com
SCLCR/L 0808 D06	8	8	8	60	9	10	CCMT CCGT 0602...	--	--	SS1751	BT08	0,040	--	●	
SCLCR/L 1010 E06	10	10	10	70	10	12						0,060	--	●	
SCLCR/L 1212 F09	12	12	12	80	17	16						0,090	--	●	
SCLCR/L 1616 H09	16	16	16	100	17	20	CCMT CCGT 09T3...	US1111	GBS1111	SS1111	BT15	0,220	--	●	
SCLCR/L 2020 K09	20	20	20	125	18	25						0,420	--	●	
SCLCR/L 2525 M09	25	25	25	150	19	32						0,740	--	●	
SCLCR/L 1616 H12	16	16	16	100	20	20	CCMT CCGT 1204...	US1221	GBS1221	SS1221	BT15	0,220	--	●	
SCLCR/L 2020 K12	20	20	20	125	20	25						0,420	--	●	
SCLCR/L 2525 M12	25	25	25	150	20	32						0,740	--	●	

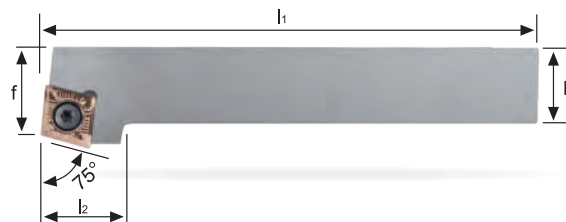

Stelo in acciaio _ Stahlschaft _ Steelshank



SCRCR/L	h1	h2	b	l1	l2	f						KG		STOCK	PRICELIST on getooling.com
SCRCR/L 0808 D06	8	8	8	60	14	9	CCMT CCGT 0602...	--	--	SS1751	BT08	0,040	--	●	
SCRCR/L 1010 E06	10	10	10	70	14	11						0,060	--	●	
SCRCR/L 1212 F09	12	12	12	80	20	13						0,090	--	●	
SCRCR/L 1616 H09	16	16	16	100	20	17	CCMT CCGT 09T3...	US1111	GBS1111	SS1111	BT15	0,220	--	●	
SCRCR/L 2020 K09	20	20	20	125	21	22						0,420	--	●	
SCRCR/L 1616 H12	16	16	16	100	24	17						0,220	--	●	
SCRCR/L 2020 K12	20	20	20	125	24	22	CCMT CCGT 1204...	US1221	GBS1221	SS1221	BT15	0,420	--	●	
SCRCR/L 2525 M12	25	25	25	150	24	27						0,740	--	●	

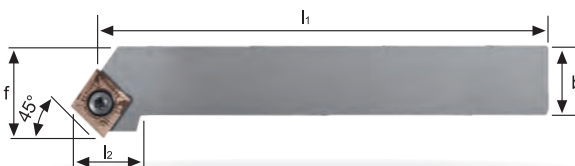

Stelo in acciaio _ Stahlschaft _ Steelshank



SCSCR/L	h1	h2	b	l1	l2	f						KG		STOCK	PRICELIST on getooling.com
SCSCR/L 0808 D06	8	8	8	60	12	10	CCMT CCGT 0602...	--	--	SS1751	BT08	0,040	--	●	
SCSCR/L 1010 E06	10	10	10	70	12	12						0,060	--	●	
SCSCR/L 1212 F09	12	12	12	80	19	16						0,090	--	●	
SCSCR/L 1616 H09	16	16	16	100	20	20	CCMT CCGT 09T3...	US1111	GBS1111	SS1111	BT15	0,220	--	●	
SCSCR/L 2020 K09	20	20	20	125	22	25						0,420	--	●	
SCSCR/L 1616 H12	16	16	16	100	22	20						0,220	--	●	
SCSCR/L 2020 K12	20	20	20	125	24	25	CCMT CCGT 1204...	US1221	GBS1221	SS1221	BT15	0,420	--	●	
SCSCR/L 2525 M12	25	25	25	150	27	32						0,740	--	●	

UTENSILI PER TORNITURA ESTERNA KLEMMHALTER FÜR DIE AUSSENBEARBEITUNG _ EXTERNAL TURNING TOOLS

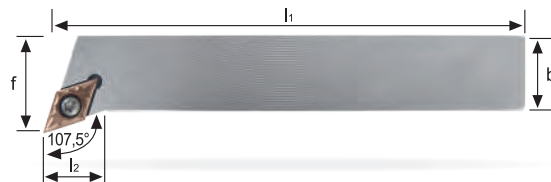



Stelo in acciaio _ Stahlschaft _ Steelshank

SDHCR/L	h1	h2	b	l1	l2	f						KG		STOCK	PRICELIST on getooling.com
SDHCR/L 1010 E07	10	10	10	70	7,2	12	DCMT DCGT 0702...	--	--	SS1751	BT08	0,060	--	●	
SDHCR/L 1212 F07	12	12	12	80	12	16						0,090	--	●	
SDHCR/L 1616 H11	16	16	16	100	11,6	20						0,220	--	●	
SDHCR/L 2020 K11	20	20	20	125	14,7	25	DCMT DCGT 11T3...	US2311	GBS1111	SS1111	BT15	0,420	--	●	
SDHCR/L 2525 M11	25	25	25	150	21	32						0,740	--	●	

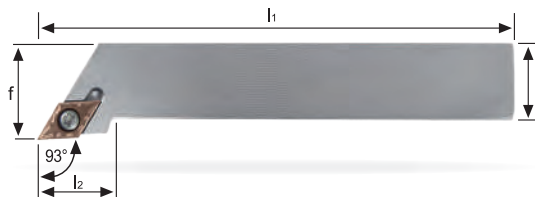

Stelo in acciaio _ Stahlschaft _ Steelshank



SDJCR/L	h1	h2	b	l1	l2	f						KG		STOCK	PRICELIST on getooling.com
SDJCR/L 0808 D07	8	8	8	60	12,8	10						0,040	--	●	
SDJCR/L 1010 E07	10	10	10	70	12,8	12						0,060	--	●	
SDJCR/L 1212 F07	12	12	12	80	17	16	DCMT DCGT 0702...	--	--	SS1751	BT08	0,090	--	●	
SDJCR/L 1616 H07	16	16	16	100	22	20						0,210	--	●	
SDJCR/L 2020 K07	20	20	20	125	24	25						0,400	--	●	
SDJCR/L 1616 H11	16	16	16	100	20	20						0,220	--	●	
SDJCR/L 2020 K11	20	20	20	125	24	25	DCMT DCGT 11T3...	US2311	GBS1111	SS1111	BT15	0,420	--	●	
SDJCR/L 2525 M11	25	25	25	150	27	32						0,740	--	●	

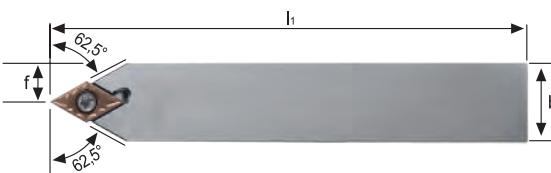

Stelo in acciaio _ Stahlschaft _ Steelshank



SDNCN	h1	h2	b	l1	f							KG		STOCK	PRICELIST on getooling.com
SDNCN 0808 D07	8	8	8	60	4							0,040	--	●	
SDNCN 1010 E07	10	10	10	70	5		DCMT DCGT 0702...	--	--	SS1751	BT08	0,060	--	●	
SDNCN 1212 F07	12	12	12	80	6							0,090	--	●	
SDNCN 1616 H11	16	16	16	100	8							0,220	--	●	
SDNCN 2020 K11	20	20	20	125	10		DCMT DCGT 11T3...	US2311	GBS1111	SS1111	BT15	0,420	--	●	
SDNCN 2525 M11	25	25	25	150	12,5							0,740	--	●	

UTENSILI PER TORNITURA ESTERNA KLEMMHALTER FÜR DIE AUSSENBEARBEITUNG _ EXTERNAL TURNING TOOLS

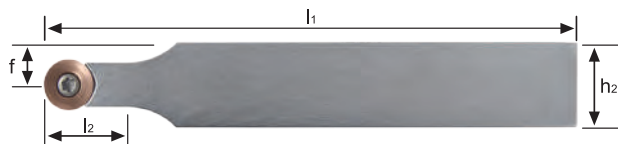

Stelo in acciaio _ Stahlschaft _ Steelshank




SRDCN	h1	h2	l1	l2	f						KG		STOCK	PRICELIST on getooling.com
SRDCN 1212 F06	12	12	80	12,4	6						0,090	--	●	
SRDCN 1616 H06	16	16	100	12,4	8	RCMT RCGT 0602...	--	--	SS1751	BT08	0,220	--	●	
SRDCN 2020 K06	20	20	125	12,4	10						0,420	--	●	
SRDCN 2525 M06	25	25	150	12,4	12,5						0,740	--	●	
SRDCN 1616 H08	16	16	100	16,4	8	RCMT RCGT 0803...	--	--	SS8831	BT08	0,220	--	●	
SRDCN 2020 K08	20	20	125	16,4	10						0,420	--	●	
SRDCN 2525 M08	25	25	150	16,4	12,5						0,740	--	●	
SRDCN 1616 H10	16	16	100	20,3	8	RCMT RCGT 1003...	US3431	GBS1111	SS1111	BT15	0,220	--	●	
SRDCN 2020 K10	20	20	125	20,3	10						0,420	--	●	
SRDCN 2525 M10	25	25	150	20,3	12,5						0,740	--	●	
SRDCN 2020 K12	20	20	125	20,3	10	RCMT RCGT 1204...	US3450	GBS1111	SS1111	BT15	0,420	--	●	
SRDCN 2525 M12	25	25	150	20,3	12,5						0,740	--	●	

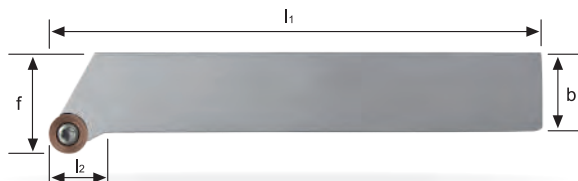

Stelo in acciaio _ Stahlschaft _ Steelshank



SRGCR/L	h1	h2	b (mm)	l1	l2	f								STOCK	PRICELIST on getooling.com
SRGCR/L 1212 F06	12	12	12	80	13,8	16	RCMT RCGT 0602...	--	--	SS1751	BT08	0,090	--	●	
SRGCR/L 1616 H06	16	16	16	100	13,8	20						0,220	--	●	
SRGCR/L 2020 K06	20	20	20	125	15,3	25						0,420	--	●	
SRGCR/L 2525 M06	25	25	25	150	18,8	32						0,740	--	●	
SRGCR/L 1616 H08	16	16	16	100	14,7	20	RCMT RCGT 0803...	--	--	SS8831	BT08	0,220	--	●	
SRGCR/L 2020 K08	20	20	20	125	16,4	25						0,420	--	●	
SRGCR/L 2525 M08	25	25	25	150	19,8	32						0,740	--	●	
SRGCR/L 1616 H10	16	16	16	100	15,5	20						0,220	--	●	
SRGCR/L 2020 K10	20	20	20	125	17,2	25	RCMT RCGT 1003...	US3431	GBS1111	SS1111	BT15	0,420	--	●	
SRGCR/L 2525 M10	25	25	25	150	20,7	32						0,740	--	●	

UTENSILI PER TORNITURA ESTERNA KLEMMHALTER FÜR DIE AUSSENBEARBEITUNG _ EXTERNAL TURNING TOOLS

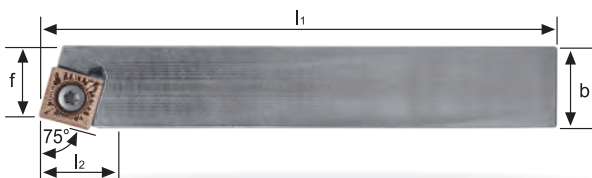




Stelo in acciaio _ Stahlschaft _ Steelshank

SSBCR/L	h1	h2	b	l1	l2	f											
SSBCR/L 1616 H09	16	16	16	100	20	13	SCMT SCGT 09T3..	US4111	GBS1111	SS1111	BT15	0,220	--	●			PRICELIST on getooling.com
SSBCR/L 2020 K12	20	20	20	125	20	17	SCMT SCGT 1204..	US4221	GBS1221	SS1221	BT15	0,420	--	●			
SSBCR/L 2525 M12	25	25	25	150	20	22						0,740	--	●			

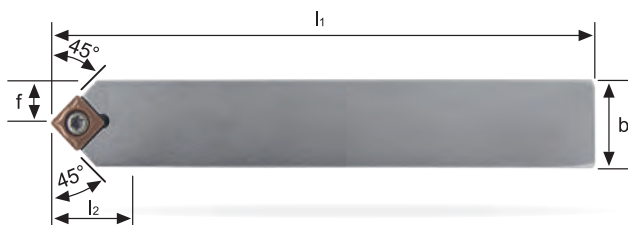

Stelo in acciaio _ Stahlschaft _ Steelshank



SSDCN	h1	h2	b	l1	l2	f											
SSDCN 1212 F09	12	12	12	80	16	6		--	--	SS1111		0,090	--	●			
SSDCN 1616 H09	16	16	16	100	20	8	SCMT SCGT 09T3..	US4111	GBS1111	SS1111	BT15	0,220	--	●			
SSDCN 2020 K09	20	20	20	125	20	10						0,420	--	●			
SSDCN 1616 H12	16	16	16	100	25	8						0,220	--	●			
SSDCN 2020 K12	20	20	20	125	25	10	SCMT SCGT 1204..	US4221	GBS1221	SS1221	BT15	0,420	--	●			
SSDCN 2525 M12	25	25	25	150	25	12,5						0,740	--	●			

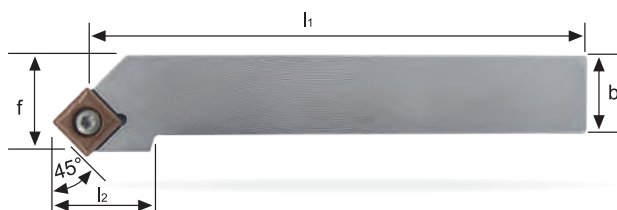

Stelo in acciaio _ Stahlschaft _ Steelshank

SSSCR/L	h1	h2	b	l1	l2	f											
SSSCR/L 0808 D09	8	8	8	60	21	13		--	--	SS1114		0,040	--	●			
SSSCR/L 1010 E09	10	10	10	70	21	14						0,060	--	●			
SSSCR/L 1212 F09	12	12	12	80	17	16	SCMT SCGT 09T3..	--	--	SS1111	BT15	0,090	--	●			
SSSCR/L 1616 H09	16	16	16	100	20	20		US4111	GBS1111	SS1111		0,220	--	●			
SSSCR/L 2020 K09	20	20	20	125	20	25						0,420	--	●			
SSSCR/L 1616 H12	16	16	16	100	18	20						0,220	--	●			
SSSCR/L 2020 K12	20	20	20	125	26,7	25	SCMT SCGT 1204..	US4221	GBS1221	SS1221	BT15	0,420	--	●			
SSSCR/L 2525 M12	25	25	25	150	25	32						0,740	--	●			


UTENSILI PER TORNITURA ESTERNA KLEMMHALTER FÜR DIE AUSSENBEARBEITUNG _ EXTERNAL TURNING TOOLS

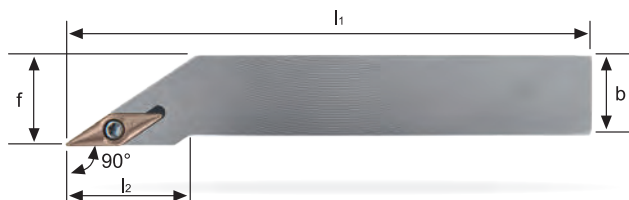

Stelo in acciaio _ Stahlschaft _ Steelshank

SVGCR/L


	h1	h2	b	l1 (mm)	l2	f						KG		STOCK	PRICELIST on getooling.com
SVGCR/L 0808 K07	8	8	8	125	15	8,5						0,040	--	●	
SVGCR/L 1010 M07	10	10	10	150	15	10,5	VCMT VCGT 0702...	--	--	VT20	BT06	0,060	--	●	
SVGCR/L 1212 M07	12	12	12	150	18	12,5						0,090	--	●	

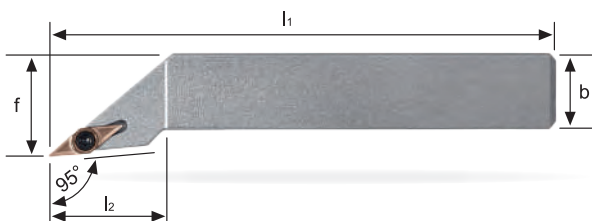

Stelo in acciaio _ Stahlschaft _ Steelshank

SVLCR/L

	h1	h2	b	l1 (mm)	l2	f						KG		STOCK	PRICELIST on getooling.com
SVLCR/L 0808 D07	8	8	8	60	15	10						0,040	--	●	
SVLCR/L 1010 E07	10	10	10	70	15	12	VCMT VCGT 0702...	--	--	VT20	BT06	0,060	--	●	
SVLCR/L 1212 F07	12	12	12	80	18	16						0,090	--	●	



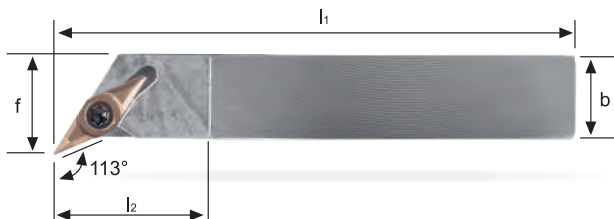


Stelo in acciaio _ Stahlschaft _ Steelshank

SVXCR/L

	h1	h2	b	l1 (mm)	l2	f						KG		STOCK	PRICELIST on getooling.com
SVXCR/L 0808 D07	8	8	8	60	15	10						0,040	--	●	
SVXCR/L 1010 E07	10	10	10	70	15	12	VCMT VCGT 0702...	--	--	VT20	BT06	0,060	--	●	
SVXCR/L 1212 F07	12	12	12	80	18	16						0,090	--	●	




UTENSILI PER TORNITURA ESTERNA KLEMMHALTER FÜR DIE AUSSENBEARBEITUNG _ EXTERNAL TURNING TOOLS

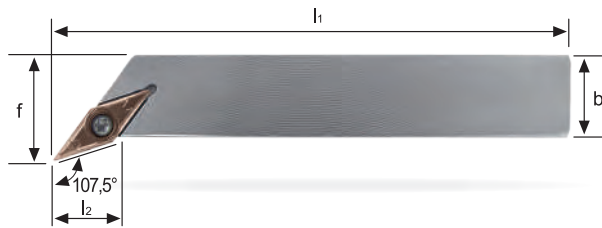

Stelo in acciaio _ Stahlschaft _ Steelshank

SVHBR/L	h1	h2	b	l1	l2	f						KG		STOCK	PRICELIST on getooling.com
SVHBR/L 1212 F11	12	12	12	80	13,4	16						0,090	--	●	
SVHBR/L 1616 H11	16	16	16	100	13,4	20	VBMT VBGT 1103...	--	--	SS1751	BT08	0,220	--	●	
SVHBR/L 2020 K11	20	20	20	125	16,6	25						0,420	--	●	
SVHBR/L 2020 K16	20	20	20	125	15,9	25	VBMT VBGT 1604...	US6522	GBS1111	SS1111	BT15	0,420	--	●	
SVHBR/L 2525 M16	25	25	25	150	20,6	32						0,740	--	●	

SVHCR/L	h1	h2	b	l1	l2	f						KG		STOCK	PRICELIST on getooling.com
SVHCR/L 1212 F11	12	12	12	80	13,4	16						0,090	--	●	
SVHCR/L 1616 H11	16	16	16	100	13,4	20	VCMT VCGT 1103...	--	--	SS1751	BT08	0,220	--	●	
SVHCR/L 2020 K11	20	20	20	125	16,6	25						0,420	--	●	
SVHCR/L 2525 M11	25	25	25	150	22,9	32						0,740	--	●	
SVHCR/L 2020 K16	20	20	20	125	15,2	25	VCMT VCGT 1604...	US6522	GBS1111	SS1111	BT15	0,420	--	●	
SVHCR/L 2525 M16	25	25	25	150	23,5	32						0,740	--	●	

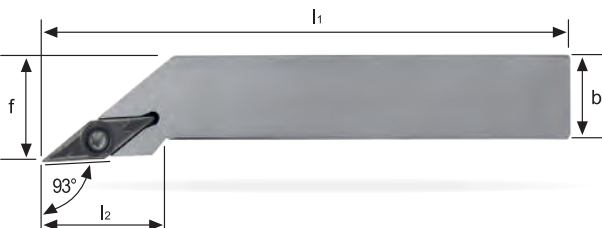



Stelo in acciaio _ Stahlschaft _ Steelshank

SVJBR/L	h1	h2	b	l1	l2	f						KG		STOCK	PRICELIST on getooling.com
SVJBR/L 1212 F11	12	12	12	80	21,5	16						0,090	--	●	
SVJBR/L 1616 H11	16	16	16	100	21,5	20	VBMT VBGT 1103...	--	--	SS1751	BT08	0,220	--	●	
SVJBR/L 2020 K11	20	20	20	125	23	25						0,420	--	●	
SVJBR/L 2020 K16	20	20	20	125	29,5	25	VBMT VBGT 1604...	US6522	GBS1111	SS1111	BT15	0,420	--	●	
SVJBR/L 2525 M16	25	25	25	150	33	32						0,740	--	●	

SVJCR/L	h1	h2	b	l1	l2	f						KG		STOCK	PRICELIST on getooling.com
SVJCR/L 1212 F11	12	12	12	80	21,5	16						0,090	--	●	
SVJCR/L 1616 H11	16	16	16	100	21,5	20	VCMT VCGT 1103...	--	--	SS1751	BT08	0,220	--	●	
SVJCR/L 2020 K11	20	20	20	125	24	25						0,420	--	●	
SVJCR/L 2525 M11	25	25	25	150	26	32						0,740	--	●	
SVJCR/L 2020 K16	20	20	20	125	29,5	25	VCMT VCGT 1604...	US6522	GBS1111	SS1111	BT15	0,420	--	●	
SVJCR/L 2525 M16	25	25	25	150	32,5	32						0,740	--	●	

UTENSILI PER TORNITURA ESTERNA
KLEMMHALTER FÜR DIE AUSSENBEARBEITUNG _ EXTERNAL TURNING TOOLS



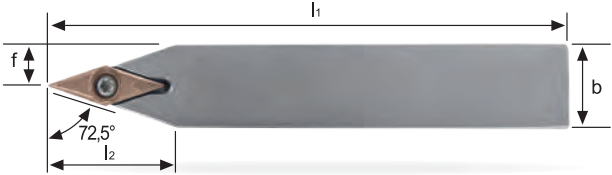


Stelo in acciaio _ Stahlschaft _ Steelshank

SWVBN	h1	h2	b	l1	l2	f						KG		STOCK	PRICELIST on getooling.com
SWVBN 1212 F11	12	12	12	80	18,5	6						0,090	--	●	
SWVBN 1616 H11	16	16	16	100	24,7	8	VBMT VBGT 1103...	--	--	SS1751	BT08	0,220	--	●	
SWVBN 2020 K11	20	20	20	125	32	10						0,420	--	●	
SWVBN 2525 M11	25	25	25	150	38,9	12,5						0,740	--	●	
SWVBN 2020 K16	20	20	20	125	30,7	10	VBMT VBGT 1604...	US6522	GBS1111	SS1111	BT15	0,420	--	●	
SWVBN 2525 M16	25	25	25	150	38,8	12,5						0,740	--	●	

Stelo in acciaio _ Stahlschaft _ Steelshank

SVVCN	h1	h2	b	l1	l2	f						KG		STOCK	PRICELIST on getooling.com
SVVCN 0808 K07	8	8	8	125	15	4	VCMT VCGT 0702...	--	--	VT20	BT06	0,040	--	●	
SVVCN 1010 M07	10	10	10	150	15	5						0,060	--	●	
SVVCN 1212 M07	12	12	12	150	18	6						0,090	--	●	
SVVCN 1212 F11	12	12	12	80	18,4	6	VCMT VCGT 1103...	--	--	SS1751	BT08	0,090	--	●	
SVVCN 1616 H11	16	16	16	100	24,7	8						0,220	--	●	
SVVCN 2020 K11	20	20	20	125	31,3	10						0,420	--	●	
SVVCN 2525 M11	25	25	25	150	39	12,5	VCMT VCGT 1604...	US6522	GBS1111	SS1111	BT15	0,740	--	●	
SVVCN 2020 K16	20	20	20	125	31,1	10						0,420	--	●	
SVVCN 2525 M16	25	25	25	150	38,2	12,5						0,740	--	●	

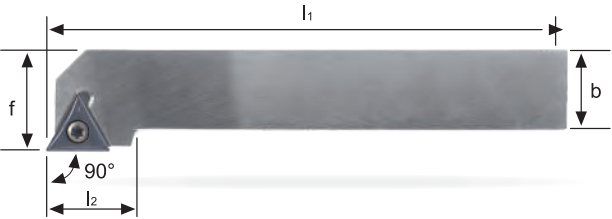

Stelo in acciaio _ Stahlschaft _ Steelshank

STGCR/L	h1	h2	b	l1	l2	f						KG		STOCK	PRICELIST on getooling.com
STGCR/L 1212 F11	12	12	12	80	19	16	TCMT 1102...	--	--	SS1751	BT08	0,090	--	●	
STGCR/L 1616 H11	16	16	16	100	19	20						0,220	--	●	
STGCR/L 1616 H16	16	16	16	100	22	20	TCMT TCGT 16T3...	US5511	GBS1111	SS1111	BT15	0,220	--	●	
STGCR/L 2020 K16	20	20	20	125	22	25						0,420	--	●	
STGCR/L 2525 M16	25	25	25	150	23	32						0,740	--	●	

UTENSILI PER FANTINE MOBILI
LANGDREHMASCHINEN WERKZEUGEN _ SWISS TYPE MACHINING TURNING TOOLS

Stelo in acciaio _ Stahlschaft _ Steelshank

SCACR/L	h1	h2	(mm)		f							STOCK	PRICELIST on getooling.com
SCACR/L 0808 X06-A	8	8	8	115	8,0	CCMT CCGT 0602...	--	--	SS1751	BT08	0,060	--	●
SCACR/L 1010 X06-A	10	10	10	115	10,0						0,100	--	●
SCACR/L 1212 X06-A	12	12	12	130	12,0						0,150	--	●
SCACR/L 1212 X09-A	12	12	12	130	12,0	CCMT CCGT 09T3...	--	--	VT40B	BT15	0,150	--	●
SCACR/L 1616 X09-A	16	16	16	130	16,0						0,260	--	●

Stelo in acciaio _ Stahlschaft _ Steelshank													
SDACR/L	h1	h2	↔ (mm)		f							STOCK	PRICELIST on getooling.com
SDACR/L 0808 X07-A	8	8	8	115	8,0	DCMT DCGT 0702...	--	--	SS1751	BT08	0,060	--	●
SDACR/L 1010 X07-A	10	10	10	115	10,0						0,090	--	●
SDACR/L 1212 X07-A	12	12	12	130	12,0						0,150	--	●
SDACR/L 1616 X07-A	16	16	16	130	16,0	DCMT DCGT 11T3...	--	--	VT40B	BT15	0,250	--	●
SDACR/L 1212 X11-A	12	12	12	130	12,0						0,150	--	●
SDACR/L 1616-X11-A	16	16	16	130	16,0						0,250	--	●


														
Stelo in acciaio _ Stahlschaft _ Steelshank														
SDNCN	h1	h2	(mm)		f								STOCK	PRICELIST on getooling.com
SDNCN 1010 X07-A	10	10	10	115	5,0	DCMT DCGT 0702...	--	--	SS1751	BT08	0,060	--	●	
SDNCN 1212 X11-A	12	12	12	130	6,0	DCMT DCGT 11T3...	--	--	VT40B	BT15	0,150	--	●	
SDNCN 1616 X11-A	16	16	16	130	8,0						0,250	--	●	

UTENSILI PER FANTINE MOBILI LANGDREHMASCHINEN WERKZEUGEN _ SWISS TYPE MACHINING TURNING TOOLS



Stelo in acciaio _ Stahlschaft _ Steelshank

SVACR/L	h1	h2	b	l1	f						KG		STOCK	PRICELIST on getooling.com
SVACR/L 0808 X11-A	8	8	8	115	8,0						0,060	--	●	
SVACR/L 1010 X11-A	10	10	10	115	10,0	VCMT VCGT 1103...	--	--	SS1751	BT08	0,090	--	●	
SVACR/L 1212 X11-A	12	12	12	130	12,0						0,150	--	●	
SVACR/L 1616 X11-A	16	16	16	130	16,0						0,250	--	●	
SVACR/L 1212 X16-A	12	12	12	130	12,0	VCMT VCGT 1604...	--	--	VT40B	BT15	0,140	--	●	
SVACR/L 1616-X16-A	16	16	16	130	16,0						0,240	--	●	

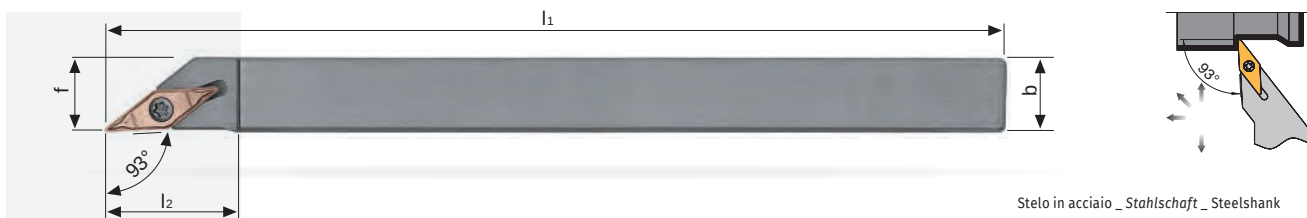

Stelo in acciaio _ Stahlschaft _ Steelshank


SVJCR/L	h1	h2	b	l1	f						KG		STOCK	PRICELIST on getooling.com
SVJCR/L 0808 X11-A	8	8	8	115	8,0						0,060	--	●	
SVJCR/L 1010 X11-A	10	10	10	115	10,0	VCMT VCGT 1103...	--	--	SS1751	BT08	0,090	--	●	
SVJCR/L 1212 X11-A	12	12	12	130	12,0						0,150	--	●	
SVJCR/L 1616 X11-A	16	16	16	130	16,0						0,250	--	●	
SVJCR/L 1212 X16-A	12	12	12	130	12,0	VCMT VCGT 1604...	--	--	VT40B	BT15	0,140	--	●	
SVJCR/L 1616-X16-A	16	16	16	130	16,0						0,240	--	●	



Stelo in acciaio _ Stahlschaft _ Steelshank

SVVCN	h1	h2	b	l1	f						KG		STOCK	PRICELIST on getooling.com
SVVCN 1010 X11-A	10	10	10	115	5,0						0,100	--	●	
SVVCN 1212 X11-A	12	12	12	130	6,0	VCMT VCGT 1103...	--	--	SS1751	BT08	0,150	--	●	
SVVCN 1616 X11-A	16	16	16	130	8,0						0,250	--	●	
SVVCN 1212 X16-A	12	12	12	130	6,0	VCMT VCGT 1604...	--	--	VT40B	BT15	0,150	--	●	
SVVCN 1616 X16-A	16	16	16	130	8,0						0,240	--	●	

UTENSILI PER FANTINE MOBILI LANGDREHMASCHINEN WERKZEUGEN _ SWISS TYPE MACHINING TURNING TOOLS

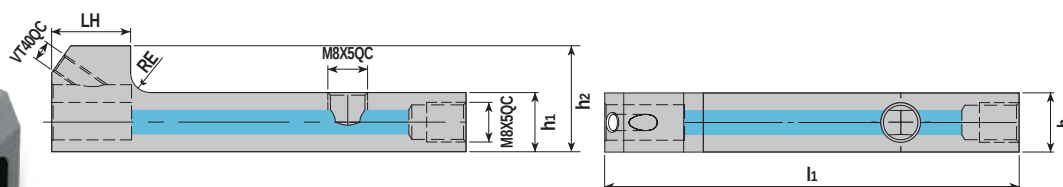

QCTB

	h1	h2	b	RE	LH	l1			KG		STOCK	PRICELIST on getooling.com
QCTB 1212	12	21,5	12	4	16	84	M8X5QC	VT40QC	0,140		●	
QCTB 1616	16	21,5	16	1	16	90	(M8X1X5)	(M4X0,7)	0,220		●	



SCLCR/L

	HF	RE	LF	l1			KG		STOCK	PRICELIST on getooling.com
SCLCR/L 12-06	11,8	0,2	27,3	43,3			0,080	-	○	
SCLCR/L 12-06 W	11,8	0,2	27,3	43,3	CCMT CCGT 0602...	SS1751	BT08	0,080	●	
SCLCR/L 16-06	15,8	0,2	27,3	43,3			0,080	-	○	
SCLCR/L 16-06 W	15,8	0,2	27,3	43,3			0,080	●		
SCLCR/L 12-09	11,8	0,2	27,3	43,3			0,080	-	○	
SCLCR/L 12-09 W	11,8	0,2	27,3	43,3	CCMT CCGT 09T3...	VT35	BT15	0,080	●	
SCLCR/L 16-09	15,8	0,2	27,3	43,3			0,090	-	○	
SCLCR/L 16-09 W	15,8	0,2	27,3	43,3			0,090	●		



SDJCR/L

	HF	RE	LF	l1			KG		STOCK	PRICELIST on getooling.com
SDJCR/L 12-07	11,8	0,2	27,3	43,3			0,080	-	○	
SDJCR/L 12-07 W	11,8	0,2	27,3	43,3	DCMT DCGT 0702...	SS1751	BT08	0,080	●	
SDJCR/L 16-07	15,8	0,2	27,3	43,3			0,080	-	○	
SDJCR/L 16-07 W	15,8	0,2	27,3	43,3			0,080	●		
SDJCR/L 12-11	11,8	0,2	27,3	43,3			0,080	-	○	
SDJCR/L 12-11 W	11,8	0,2	27,3	43,3	DCMT DCGT 11T3...	VT35	BT15	0,080	●	
SDJCR/L 16-11	15,8	0,2	27,3	43,3			0,090	-	○	
SDJCR/L 16-11 W	15,8	0,2	27,3	43,3			0,090	●		



SVJCR/L

	HF	RE	LF	l1			KG		STOCK	PRICELIST on getooling.com
SVJCR/L 12-11	11,8	0,2	27,3	43,3			0,070	-	○	
SVJCR/L 12-11 W	11,8	0,2	27,3	43,3	VCMT VCGT 1103...	SS1751	BT08	0,070	●	
SVJCR/L 16-11	15,8	0,2	27,3	43,3			0,080	-	○	
SVJCR/L 16-11 W	15,8	0,2	27,3	43,3			0,080	●		






... ER/L

SER/L 12-11	11,8	27,3	43,3	11 ER/L	-	-	-	-	SS1751	BT08	0,070	-	○
TER/L 16-16	15,8	27,3	43,3	16 ER/L	US-3R	US-3L	USR-3E	GBS-3E	VT40-3E	BT10	0,100	-	○

BARENI PER TORNITURA INTERNA



BOHRSTANGEN FÜR DIE INNENBEARBEITUNG _ INTERNAL BORING BARS

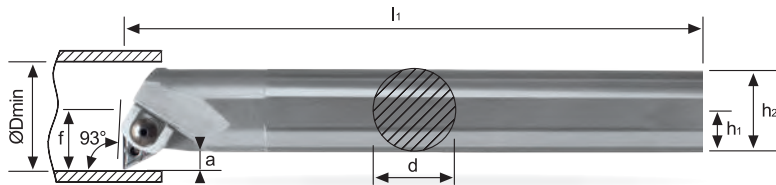

Stelo in acciaio _ Stahlschaft _ Steelshank

A-MTFNR/L	d	h1	h2	l1 (mm)	f	a	Dmin		KG		STOCK	PRICELIST on getooling.com
A32S MTFNR/L 16	32	15	30	250	22	5,9	44	TN... 1604...	1,400			
A40T MTFNR/L 16	40	18	36	300	27	6,9	54		2,700			

RICAMBI Ersatzteile Spare parts	Staffa Klemme Clamp	Perno Keilstück Wedge	Supporto Unterlegplatte Support pad	Grano Gewindestift Pin
...MTFNR/L 16	GS1	P1	E1	G1


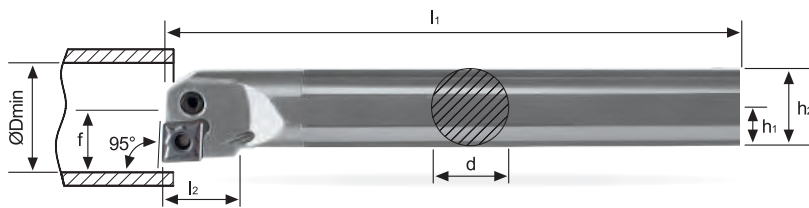


Stelo in acciaio _ Stahlschaft _ Steelshank

A-PCLNR/L	d	h1	h2	l1 (mm)	l2	f	Dmin		KG		STOCK	PRICELIST on getooling.com
A25R PCLNR/L 12	25	12,5	24	200	21	17	32	CN... 1204...	0,700			
A32S PCLNR/L 12	32	16	31	250	24,1	22	40		1,400			
A40T PCLNR/L 12	40	20	38,5	300	24,1	27	49		2,700			

RICAMBI Ersatzteile Spare parts	Supporto Unterlage Support pad	Leva Hebel Lever	Vite di fissaggio Klemmschraube Clamping screw	Spina supporto Rohrstift Shim pin	Punzone Montagedorn Shim pin punch
...25...PCLNR/L 12	UP 1111	HP 1111	SP 1114	RP 1111	MP 1111
...32-40...PCLNR/L 12	UP 1111	HP 1111	SP 1111	RP 1111	MP 1111

BARENI PER TORNITURA INTERNA BOHRSTANGEN FÜR DIE INNENBEARBEITUNG _ INTERNAL BORING BARS

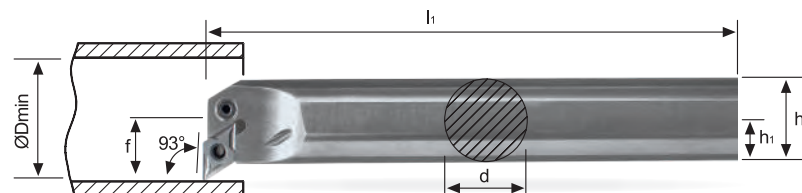

Stelo in acciaio _ Stahlschaft _ Steelshank

A-PDUNR/L

	d	h1	h2	l1	f	D _{min}		KG		STOCK	PRICELIST on getooling.com
A32S PDUNR/L 15	32	16	31	250	22	40	DN...	1,400		○	
A40T PDUNR/L 15	40	20	38,5	300	27	49	1506...	2,700		○	

RICAMBI Ersatzteile Spare parts

Supporto
Unterlage
Support pad

Leva
Hebel
Lever

Vite di fissaggio
Klemmschraube
Clamping screw

Spina supporto
Rohrstift
Shim pin

Punzone
Montagedorn
Shim pin punch

...32-40... PDUNR/L 15



UP 2421

HP 2421

SP 1111

RP 1111

MP 1111

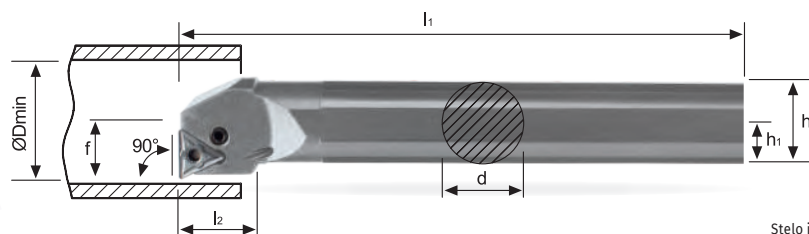

Stelo in acciaio _ Stahlschaft _ Steelshank

A-PTFNR/L

	d	h1	h2	l1	l2	f	D _{min}		KG		STOCK	PRICELIST on getooling.com
A25R PTFNR/L 16	25	12,5	24	200	17,5	17	32	TN... 1604...	0,700		○	

RICAMBI Ersatzteile Spare parts

Supporto
Unterlage
Support pad

Leva
Hebel
Lever

Vite di fissaggio
Klemmschraube
Clamping screw

Spina supporto
Rohrstift
Shim pin

Punzone
Montagedorn
Shim pin punch

...25... PTFNR/L 16

UP 6211

HP 4751



SP 3111

RP 3112

MP 3111

UTENSILI PER TORNITURA ESTERNA WERKZEUGE FÜR DIE AUSSENBEARBEITUNG _ EXTERNAL TURNING TOOLS

Con lubrificazione _ Mit Innenkühlung _ With coolant

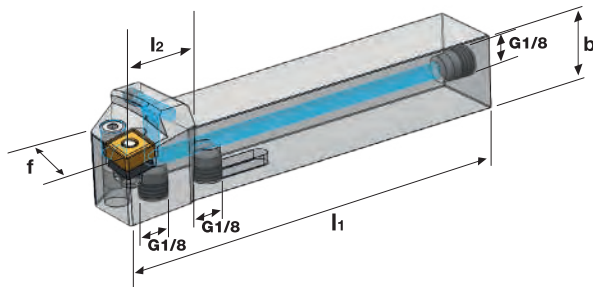

INCLUDING FREE
NO SEPARATE SALE

Stelo in acciaio _ Stahlschaft _ Steelshank

PCLNR/L

h1 h2 b l1 l2 f (mm)



PRICELIST on
getooling.com

PCLNR/L 1616 H12 IK G1/8 16 16 16 100 26,1 20

0,254



PCLNR/L 2020 K12 IK G1/8 20 20 20 125 27,4 25

CN...
1204...

UP
1111E

HP
1111E

SP
1111E

RP
1111E




MP
1111

0,428



PCLNR/L 2525 M12 IK G1/8 25 25 25 150 28 32

0,751

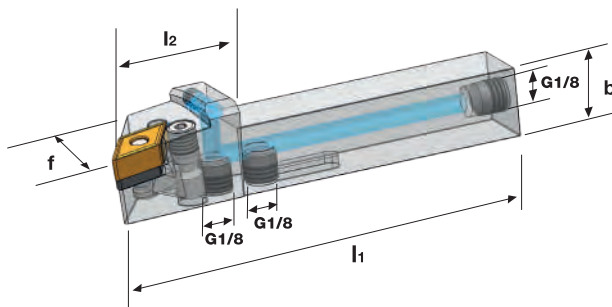

INCLUDING FREE
NO SEPARATE SALE

Stelo in acciaio _ Stahlschaft _ Steelshank

PDJNR/L

h1 h2 b l1 l2 f (mm)



PRICELIST on
getooling.com

PDJNR/L 1616 H11 IK G1/8 16 16 16 100 30 20

DN...
1104...

UP
2011E

HP
2011E

SP
3111E

RP
3112E

MP
3111

0,220



PDJNR/L 2020 K15 IK G1/8 20 20 20 125 30 25

DN...
1506...

UP
2421E

HP
2421E

SP
1111E

RP
1111E

MP
1111

0,411





PDJNR/L 2525 M15 IK G1/8 25 25 25 150 30 32

0,737



UTENSILI PER TORNITURA ESTERNA **WERKZEUGE FÜR DIE AUSSENBEARBEITUNG _ EXTERNAL TURNING TOOLS** Con lubrificazione _ Mit Innenkühlung _ With coolant

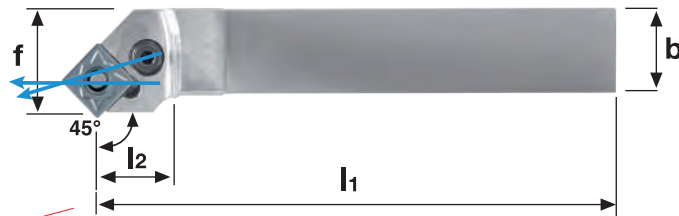

INCLUDING FREE
NO SEPARATE SALE

Stelo in acciaio _ Stahlschaft _ Steelshank

PSSNR/L

IN ESAURIMENTO

h1 h2 b l1 l2 f (mm)



KG STOCK PRICELIST on getooling.com

PSSNR/L 2020 K12 IK G1/8

20 20 20 125 29,4 25



0,430

SN... UP HP SP RP MP
1204... 5112 1111 1111 1111 1111

PSSNR/L 2525 M12 IK G1/8

25 25 25 150 29,3 32

0,760

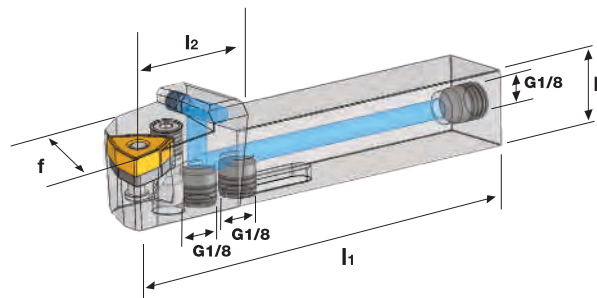

INCLUDING FREE
NO SEPARATE SALE

Stelo in acciaio _ Stahlschaft _ Steelshank

PWLNLR/L

h1 h2 b l1 l2 f (mm)



KG STOCK PRICELIST on getooling.com

PWLNLR/L 2020 K08 IK G1/8

20 20 20 125 25 25

0,420




WN... UP HP SP RP MP
0804... 71011E 1111E 1111E 1111E 1111

PWLNLR/L 2525 M08 IK G1/8

25 25 25 150 25 32

0,767



UTENSILI PER TORNITURA ESTERNA
WERKZEUGE FÜR DIE AUSSENBEARBEITUNG _ EXTERNAL TURNING TOOLS

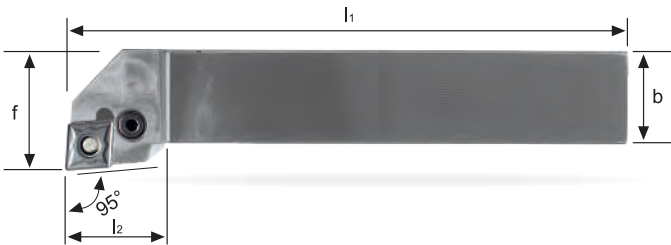

Stelo in acciaio _ Stahlschaft _ Steelshank

PCLNR/L	h1	h2	↔ (mm)		l2	f		KG		STOCK	PRICELIST on getooling.com
PCLNR/L 1616 H12	16	16	b	l1	26,1	20,3	CN... 1204...	0,220	--	○	
PCLNR/L 2020 K12	20	20	20	125	27,5	25,3	CN... 1204...	0,420	--	○	
PCLNR/L 2525 M12	25	25	25	150	28,1	32,3	CN... 1204...	0,740	--	○	
PCLNR/L 2525 M16	25	25	25	150	32,7	32,3	CN... 1606...	0,740	--	○	
PCLNR/L 3225 P12	32	32	25	170	31,2	32,3	CN... 1204...	1,300	--	○	
PCLNR/L 3232 P16	32	32	32	170	40	40,3	CN... 1606...	1,300	--	○	
PCLNR/L 3232 P19	32	32	32	170	38,2	40,3	CN... 1906...	1,300	--	○	
PCLNR/L 4040 S19	40	40	40	250	40	50,3		1,700	--	○	

RICAMBI Ersatzteile Spare parts	Supporto Unterlage Support pad	Leva Hebel Lever	Vite di fissaggio Klemmschraube Clamping screw	Spina supporto Rohrstift Shim pin	Punzone Montagedorn Shim pin punch
PC... R/L... 12	UP 1111	HP 1111	SP 1111	RP 1111	MP 1111
PC... R/L... 16	UP 1221	HP 1221	SP 1221	RP 1221	MP 1221
PC... R/L... 19	UP 1321	HP 1321	SP 1321	RP 1321	MP 1321


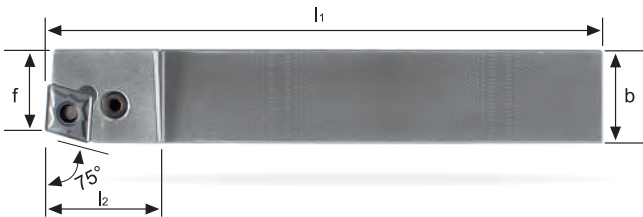


Stelo in acciaio _ Stahlschaft _ Steelshank

PCBNR/L	h1	h2	↔ (mm)		l2	f		KG		STOCK	PRICELIST on getooling.com
PCBNR/L 2525 M12	25	25	b	l1	27,7	22	CN... 1204...	0,740	--	○	

RICAMBI Ersatzteile Spare parts	Supporto Unterlage Support pad	Leva Hebel Lever	Vite di fissaggio Klemmschraube Clamping screw	Spina supporto Rohrstift Shim pin	Punzone Montagedorn Shim pin punch
PC... R/L... 12	UP 1111	HP 1111	SP 1111	RP 1111	MP 1111

UTENSILI PER TORNITURA ESTERNA WERKZEUGE FÜR DIE AUSSENBEARBEITUNG _ EXTERNAL TURNING TOOLS

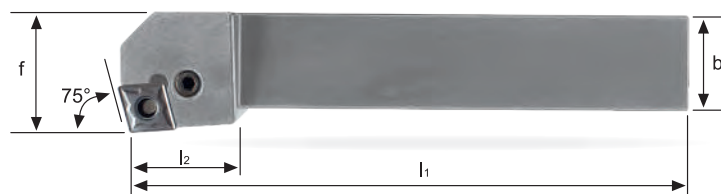

Stelo in acciaio _ Stahlschaft _ Steelshank

PCKNR/L

	h1	h2	(mm)		l2	f		KG		STOCK	PRICELIST on getooling.com
			b	l1							
PCKNR/L 2020 K12	20	20	125	27,4	25	25	CN... 1204...	0,420	--	○	
PCKNR/L 2525 M12	25	25	150	28	25	32		0,740	--	○	

RICAMBI Ersatzteile Spare parts

Supporto Unterlage Support pad




Leva Hebel Lever

Vite di fissaggio Klemmschraube Clamping screw

Spina supporto Rohrstift Shim pin

Punzone Montagedorn Shim pin punch

PC... R/L... 12	UP 1111	HP 1111	SP 1111	RP 1111	MP 1111
-----------------	---------	---------	---------	---------	---------

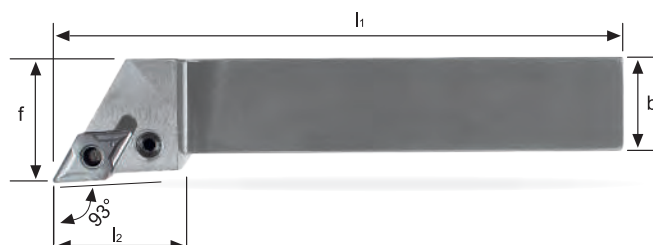

Stelo in acciaio _ Stahlschaft _ Steelshank

PDJNR/L

	h1	h2	(mm)		l2	f		KG		STOCK	PRICELIST on getooling.com
			b	l1							
PDJNR/L 2020 K15	20	20	20	125	35,4	25,2	DN... 1506...	0,420	--	○	
PDJNR/L 2525 M15	25	25	25	150	35,4	32,2	DN... 1506...	0,740	--	○	
PDJNR/L 3232 P15	32	32	32	170	35,4	40,2	DN... 1506...	1,300	--	○	

RICAMBI Ersatzteile Spare parts

Supporto Unterlage Support pad

Leva Hebel Lever



Vite di fissaggio Klemmschraube Clamping screw

Spina supporto Rohrstift Shim pin

Punzone Montagedorn Shim pin punch

PD... R/L... 15	UP 2421	HP 2421	SP 1111	RP 1111	MP 1111
-----------------	---------	---------	---------	---------	---------




UTENSILI PER TORNITURA ESTERNA
WERKZEUGE FÜR DIE AUSSENBEARBEITUNG _ EXTERNAL TURNING TOOLS

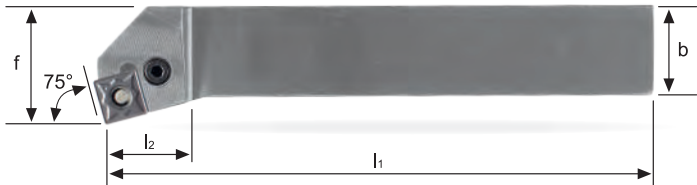

Stelo in acciaio _ Stahlschaft _ Steelshank

PSKNR/L			↔ (mm)		l2	f		KG		STOCK	PRICELIST on getooling.com
	h1	h2	b	l1							
PSKNR/L 2020 K12	20	20	20	125	20,7	25,3	SN... 1204...	0,420	--	○	
PSKNR/L 2525 M12	25	25	25	150	24	32,3		0,740	--	○	
PSKNR/L 2525 M15	25	25	25	150	24,8	32,3	SN... 1506...	0,740	--	○	
PSKNR/L 3232 P15	32	32	32	170	27,6	40,1		1,300	--	○	
PSKNR/L 3232 P19	32	32	32	170	37,4	40,3	SN... 1906...	1,300	--	○	

RICAMBI Ersatzteile Spare parts	Supporto Unterlage Support pad	Leva Hebel Lever	Vite di fissaggio Klemmschraube Clamping screw	Spina supporto Rohrstift Shim pin	Punzone Montagedorn Shim pin punch
PS... R/L... 12	UP 5112	HP 1111	SP 1111	RP 1111	MP 1111
PS... R/L... 15	UP 5421	HP 1221	SP 1221	RP 1221	MP 1221
PS... R/L... 19	UP 5321	HP 1321	SP 1321	RP 1321	MP 1321

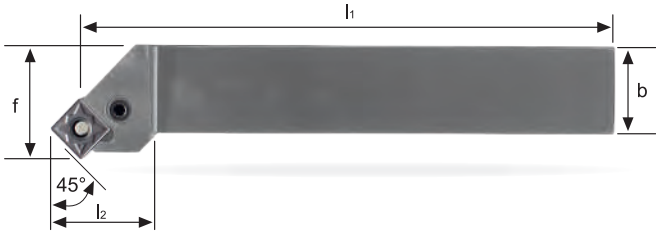



Stelo in acciaio _ Stahlschaft _ Steelshank

PSSNR/L			↔ (mm)		l2	f		KG		STOCK	PRICELIST on getooling.com
	h1	h2	b	l1							
PSSNR/L 2020 K12	20	20	20	125	29,4	25,3	SN... 1204...	0,420	--	○	
PSSNR/L 2525 M12	25	25	25	150	29,3	32,3		0,740	--	○	
PSSNR/L 2525 M15	25	25	25	150	32,5	32,3	SN... 1506...	0,740	--	○	
PSSNR/L 3232 P15	32	32	32	170	32,5	40,3		1,300	--	○	

RICAMBI Ersatzteile Spare parts	Supporto Unterlage Support pad	Leva Hebel Lever	Vite di fissaggio Klemmschraube Clamping screw	Spina supporto Rohrstift Shim pin	Punzone Montagedorn Shim pin punch
PS... R/L... 12	UP 5112	HP 1111	SP 1111	RP 1111	MP 1111
PS... R/L... 15	UP 5421	HP 1221	SP 1221	RP 1221	MP 1221




UTENSILI PER TORNITURA ESTERNA WERKZEUGE FÜR DIE AUSSENBEARBEITUNG _ EXTERNAL TURNING TOOLS

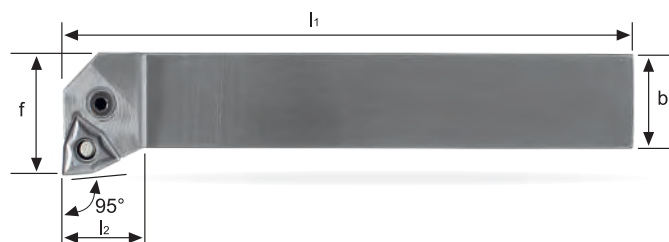

Stelo in acciaio _ Stahlschaft _ Steelshank

PWNLR/L	h1	h2	b (mm)		l1	l2	f		KG		STOCK	PRICELIST on getooling.com
PWNLR/L 1616 H06	16	16	16		100	20	23	WN... 0604...	0,220	--	○	
PWNLR/L 2020 K06	20	20	20		125	22	25		0,420	--	○	
PWNLR/L 2020 K08	20	20	20		125	22	25	WN... 0804...	0,420	--	○	
PWNLR/L 2525 M06	25	25	25		150	22,4	32	WN... 0604...	0,740	--	○	
PWNLR/L 2525 M08	25	25	25		150	22,4	32	WN... 0804...	0,740	--	○	
PWNLR/L 3232 P08	32	32	32		170	35	40		1,300	--	○	

RICAMBI Ersatzteile Spare parts	Supporto Unterlage Support pad	Leva Hebel Lever	Vite di fissaggio Klemmschraube Clamping screw	Spina supporto Rohrstift Shim pin	Punzone Montagedorn Shim pin punch
PW... R/L... 06	UP 71111	HP 4751	SP 3111	RP 3112	MP 3111
PW... R/L... 08	UP 71011	HP 1111	SP 1111	RP 1111	MP 1111

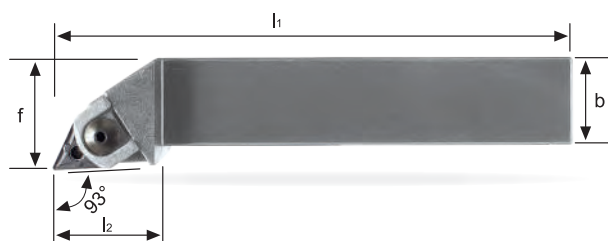



Stelo in acciaio _ Stahlschaft _ Steelshank

MTJNR/L	h1	h2	b (mm)		l1	l2	f		KG		STOCK	PRICELIST on getooling.com
MTJNR/L 2020 K16	20	20	20		125	35	25	TN...1604...	0,420	--	○	
MTJNR/L 2525 M16	25	25	25		150	32	32		0,740	--	○	

RICAMBI Ersatzteile Spare parts	Staffa Klemme Clamp	Perno Keilstück Wedge	Supporto Unterlegplatte Support pad	Grano Gewindestift Pin
MT... R/L... 16	GS1	P1	E1	G1

UTENSILI PER TAGLIO E SCANALATURA ESTERNA
AUSSENBEARBEITUNG RADIAL - STECHDREHEN _ EXTERNAL MACHINING GROOVING

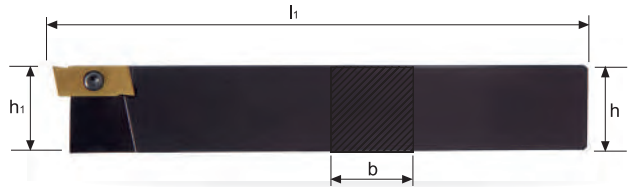




Stelo in acciaio _ Stahlschaft _ Steelshank

THE / THS	h1	h	b	l1				KG		STOCK	PRICELIST on getooling.com
THE-7-0808 R/L	08	08	08	100	GIE... GP-ST-SG- GR-GW	VT 30-G	BT08	0,040	--	○	
THE-7-1010 R/L	10	10	10	120				0,060	--	○	
THE-7-1212 R/L	12	12	12	120				0,090	--	○	
THE-7-1616 R/L	16	16	16	120				0,220	--	○	
THE-7-2020 R/L	20	20	20	120				0,420	--	○	
THE-7-2525 R/L	25	25	25	120				0,740	--	○	


Utensili per macchine svizzere _ Swiss machine tools

THS-7-0808 R/L	08	08	08	140	GIE... GP-ST-SG- GR-GW	VT 30-G	BT08	0,040	--	○	
THS-7-1010 R/L	10	10	10	150				0,060	--	○	

UTENSILI PER SCANALATURA INTERNA
INNENBEARBEITUNG INNENSTECHDREHEN _ INTERNAL MACHINING INTERNAL GROOVING

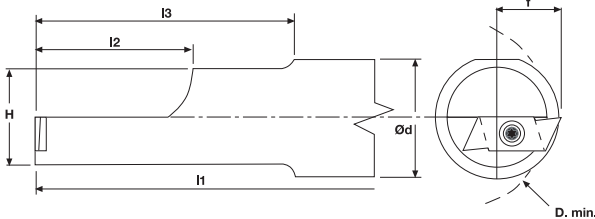

THI	ØD	Ød	f	H	l1	l2	l3				KG		STOCK	PRICELIST on getooling.com
THI-7-20 R/L	38,1	20	13,34	195	140	25	50	GIE... GP-ST-SG- GR-GW	VT 30-G	BT08	0,220	--	○	
THI-7-25 R/L	38,1	25	13,34	195	150	32	63				0,420	--	○	
THI-7-32 R/L	38,1	32	13,34	195	150	32	63				0,740	--	○	

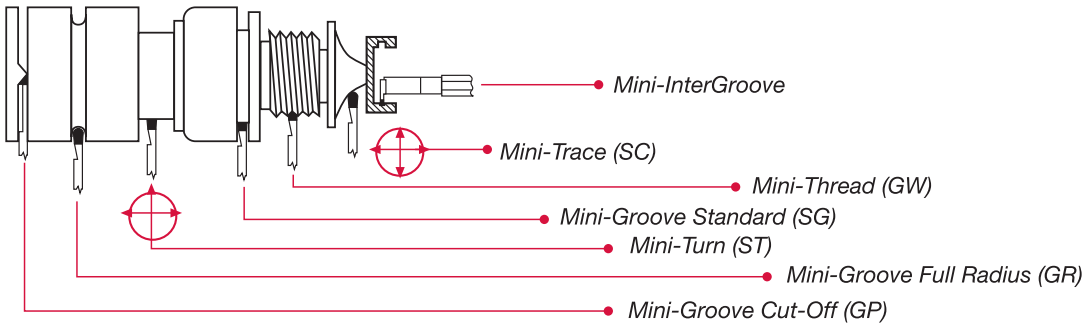

NOTE: - per utensili destri (R) inserto sinistro (L) - per utensili sinistri (L) inserto destro (R)
NOTE: - for rechte Werkzeuge (R) linke W.P. (L) - for linke Werkzeuge (L) rechte W.P. (R)
NOTE: - right hand holders (R) Left hand inserts (L) - Left hand holders (L) right hand inserts (R)

ESEMPIO SET _ SATZ BEISPIEL _ SET EXAMPLE

**SET A - SCLCR/L 06**

N° 1 A 0608H SCLCR/L 06
N° 1 A 0810J SCLCR/L 06
N° 1 A 1012K SCLCR/L 06
N° 1 A 1216M SCLCR/L 06

**SET A - SDUCR/L 07**

N° 1 A 0810H SDUCR/L 07
N° 1 A 1012K SDUCR/L 07
N° 1 A 1216M SDUCR/L 07

**SET A - SDQCR/L 07**

N° 1 A 0810H SDQCR/L 07
N° 1 A 1012K SDQCR/L 07
N° 1 A 1216M SDQCR/L 07

**SET A - SWUCR/L 02**

N° 1 A 0508H SWUCR/L 02
N° 1 A 0608H SWUCR/L 02

**SET AH - SCLCR/L 06**

N° 1 AH 0608H SCLCR/L 06
N° 1 AH 0810J SCLCR/L 06
N° 1 AH 1012K SCLCR/L 06
N° 1 AH 1216M SCLCR/L 06

**SET AH - SDUCR/L 07**

N° 1 AH 0810H SDUCR/L 07
N° 1 AH 1012K SDUCR/L 07
N° 1 AH 1216M SDUCR/L 07

**SET E SV.CR/L 05 + 20 WP 05**

N° 1 E08F SVLCR/L 05
N° 1 E08F SVXCR/L 05
N° 1 E08F SVVCR/L 05
N° 1 E08F SV95CR/L 05
N° 10 VCGT 050102 FN-ALU K15
N° 10 VCGT 050102 EN-PM1 K400

**SET E SV.CR/L 07 + 20 WP VC07**

N° 1 E10H SVLCR/L 07
N° 1 E10H SVXCR/L 07
N° 1 E10H SVVCR/L 07
N° 1 E10H SV95CR/L 07
N° 10 VCGT 070202FN-ALU K15
N° 10 VCMT 070202EN-PM1 K400

**SET E SCLCR/L 06**

N° 1 E08K SCLCR/L 06
N° 1 E10K SCLCR/L 06
N° 1 E12M SCLCR/L 06

**SET E SDUCR/L 07**

N° 1 E10K SDUCR/L 07
N° 1 E12M SDUCR/L 07

**SET E SCLCR/L 03**


N° 1 E04G SCLCR/L 03
N° 1 E05H SCLCR/L 03
N° 1 E06J SCLCR/L 03

**SET E - SWUCR/L 02**


N° 1 E 0508H SWUCR/L 02
N° 1 E 0608H SWUCR/L 02

GROOVING




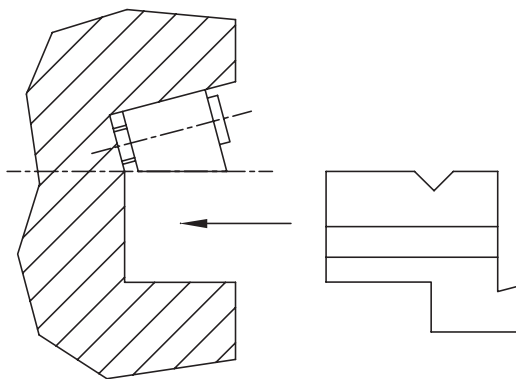

Base holder assembly instruction

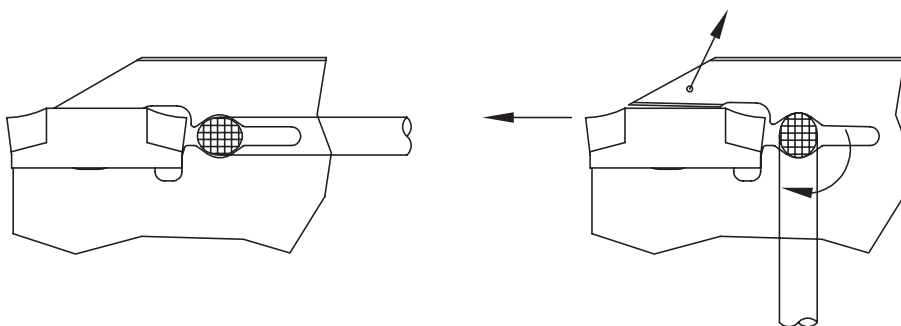


Instruction for changing the insert

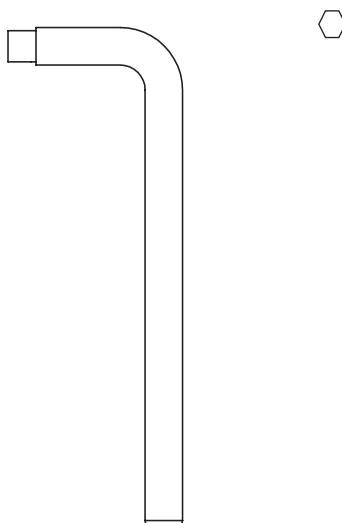


Assembly-key

BASE DI SUPPORTO _ GRUNDHALTER _ BASE HOLDER

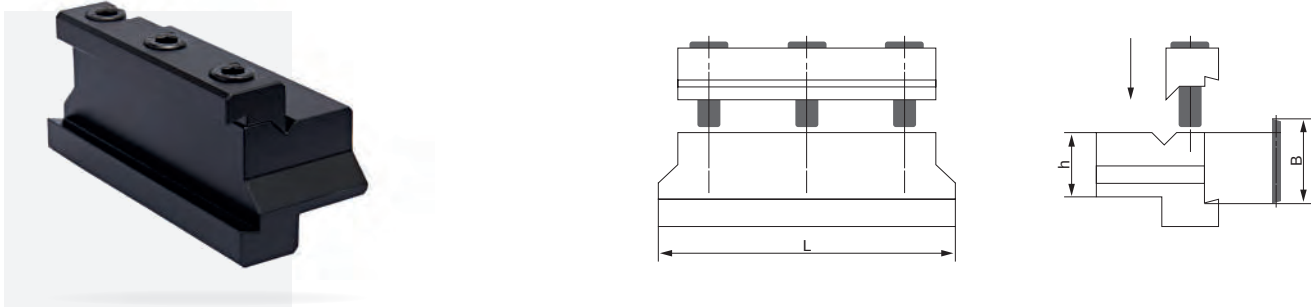



GETB	↔ (mm)		B	KG	STOCK	PRICELIST on getooling.com
	h	L				
GETB 1910	10	76	19	0,200	○	
GETB 1912	12	76	19	0,250	○	
GETB 1916	16	76	19	0,300	○	
GETB 2620	20	87	26	0,600	○	
GETB 2625	25	87	26	0,700	○	
GETB 3220	20	100	32	0,800	○	
GETB 3225	25	110	32	1,000	○	
GETB 3232	32	120	32	1,300	○	

BASE VDI CON LUBRIFICAZIONE _ VDI GRUNDHALTER MIT IK _ VDI TOOL HOLDER WITH IC

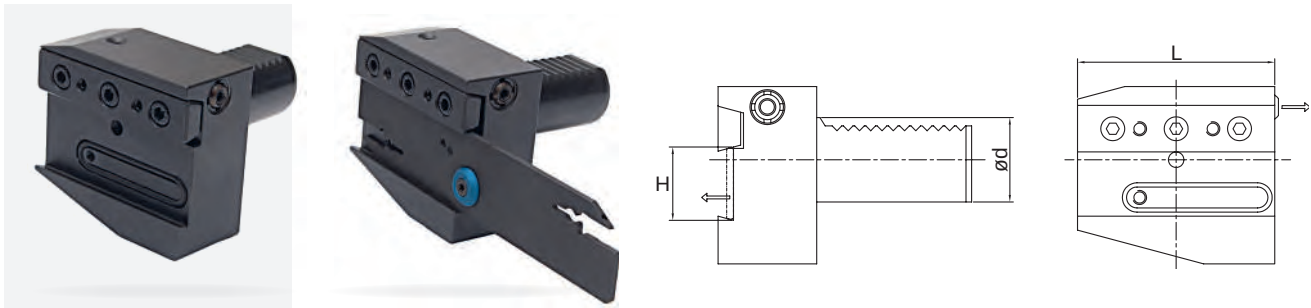



GEGB	↔ (mm)		H	KG	STOCK	PRICELIST on getooling.com
	Ø d	L				
GEGB VDI30/26 COOL	30	70	26	1,300	○	
GEGB VDI30/32 COOL	30	70	32	1,300	○	
GEGB VDI40/32 COOL	40	85	32	2,150	○	

LAMA _ STECHSCHWERTER _ BLADE

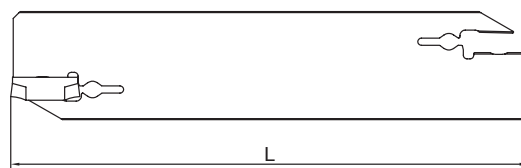

GECB


	W	H (mm)	L		KG	STOCK	PRICELIST on getooling.com
GECB 1920 S	2,0	19	86	GELCG..192002...	0,040	●	
GECB 2620 S	2,0	26	110		0,050	●	
GECB 2630 S	3,0	26	110	GELCG..193002...	0,060	●	
GECB 3230 S	3,0	32	150		0,090	●	
GECB 2640 S	4,0	26	110	GELCG..234002...	0,100	●	
GECB 3240 S	4,0	32	150		0,100	●	

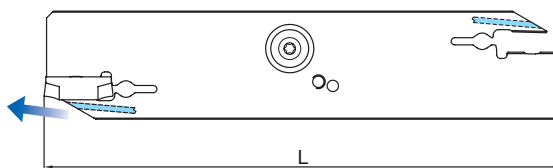

GECB COOL


	W	H (mm)	L	VT40SL	GESL	BT15		KG		STOCK	PRICELIST on getooling.com
GECB 2620 S COOL	2,0	26	110				GELCG..192002...	0,050	💧	●	
GECB 2630 S COOL	3,0	26	110				GELCG..193002...	0,060	💧	●	
GECB 3230 S COOL	3,0	32	150					0,090	💧	●	
GECB 2640 S COOL	4,0	26	110				GELCG..234002...	0,100	💧	●	
GECB 3240 S COOL	4,0	32	150					0,100	💧	●	

BASE SUPPORTO LAMA _GRUNDHALTER_ TOOL HOLDER

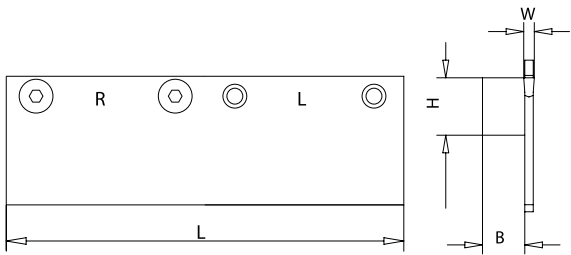

GEBHM	(mm)			Scanalatura consigliata Empfohlene Stechbreite			 KG	STOCK	PRICELIST on getooling.com
	H	B	L						
GEBHM1010N	10	10	100	2	VT50 BHM	3.00mm	0,080	●	
GEBHM1212N	12	12	100	2			0,110	●	
GEBHM1616N	16	16	100	2 / 3			0,200	●	
GEBHM2020N	20	20	100	2 / 3 / 4			0,300	●	
GEBHM2525N	25	25	100	2 / 3 / 4			0,400	●	



LAMA _STECHSCHWERTER_ BLADE

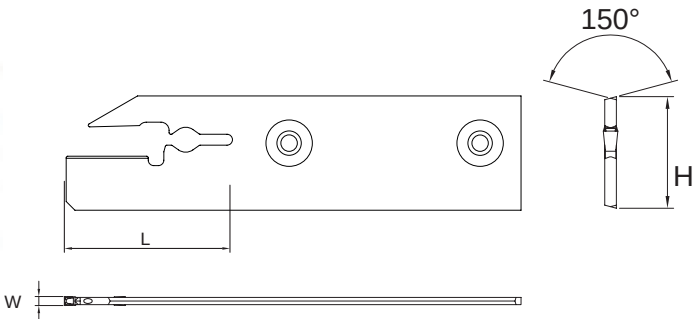

GECBM	(mm)			 KG	STOCK	PRICELIST on getooling.com
	W	L				
GECBM2N	2,0	20	GELCG..192002...	0,030	●	
GECBM3N	3,0	25	GELCG..193002...	0,040	●	
GECBM4N	4,0	30	GELCG..234002...	0,050	●	



FRESE PER SCANALATURE E TAGLIO _ SCHEIBENFRÄSER _ GROOVING AND CUT OFF MILLS

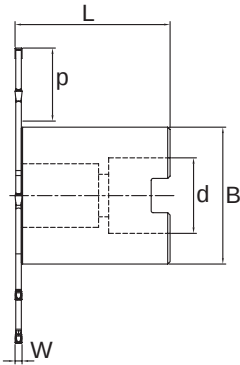
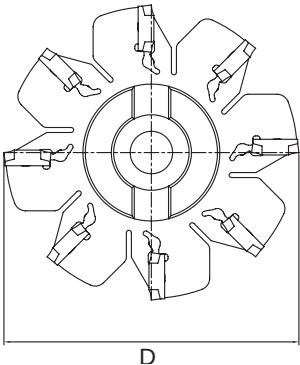


GEDM			↔ (mm)						KG		STOCK	PRICELIST on getooling.com
	Ø D	L	W	p	Ø B	d	Z					
GEDM 08020 Z4 ST *	80	39,9	2,0	25	29	M16	4	GELCG..192002	0,250	--	●	
GEDM 10020 Z6 SA	100	51,9	2,0	28	40	22	6		0,700	--	●	
GEDM 12520 Z8 SA	125	51,9	2,0	36	48	27	8		1,250	--	●	
GEDM 16020 Z10 SA	160	64,9	2,0	39	80	40	10	GELCG..193002	2,500	--	●	
GEDM 08030 Z4 ST *	80	40,7	3,0	25	29	M16	4		0,250	--	●	
GEDM 10030 Z6 SA	100	52,7	3,0	28	40	22	6		0,700	--	●	
GEDM 12530 Z8 SA	125	52,7	3,0	36	48	27	8		1,300	--	●	
GEDM 16030 Z10 SA	160	65,7	3,0	39	80	40	10	GELCG..234002	2,550	--	●	
GEDM 12540 Z6 SA	125	53,5	4,0	37,5	48	27	6		1,350	--	●	
GEDM 16040 Z8 SA	160	66,5	4,0	39	80	40	8		2,650	--	●	

* Gambo filettato _ Schaftausführung Gewinde _ Threaded shank

INSERTI _ WECHSELPLATTEN _ INSERTS

Inserto unico per tutto il programma _ Ein Wendeplatte fuer gesamtes Programm _ One insert for whole programme

 CODICE ORDINE Bestell-Nr. Order No.	 FIGURA Form Figure	 (mm)		 DENOMINAZIONE Bezeichnung Designation	 NON RIVESTITI Unbeschichte Uncoated				 RIVESTITI Beschichtet Coated						CERMET	
		W	r		TAGLIENTI <i>Schneide</i> Cutting edge	K15	P25	P40	P200	P300	K300	K400	TIN PVD	TIALN PVD	X99	X55
 GELCGS	 W r	2,0	0,2	1	GELCGS 192002	●				●	●					
		3,0	0,2	1	GELCGS 193002	●				●	●					
		4,0	0,2	1	GELCGS 234002	●				●	●					
 GELCGD	 W r	2,0	0,2	2	GELCGD 192002	●				●	●					
		3,0	0,2	2	GELCGD 193002	●				●	●					
		4,0	0,2	2	GELCGD 234002	●				●	●					

GE KEY


Chiave _ Schlüssel _ Spanner

PRICELIST on
getooling.com



Chiave non inclusa. Da ordinare separatamente.
Schlüssel nicht eingeschlossen. Separat bestellen.
Key not included. To be ordered separately.

GE DRILLS

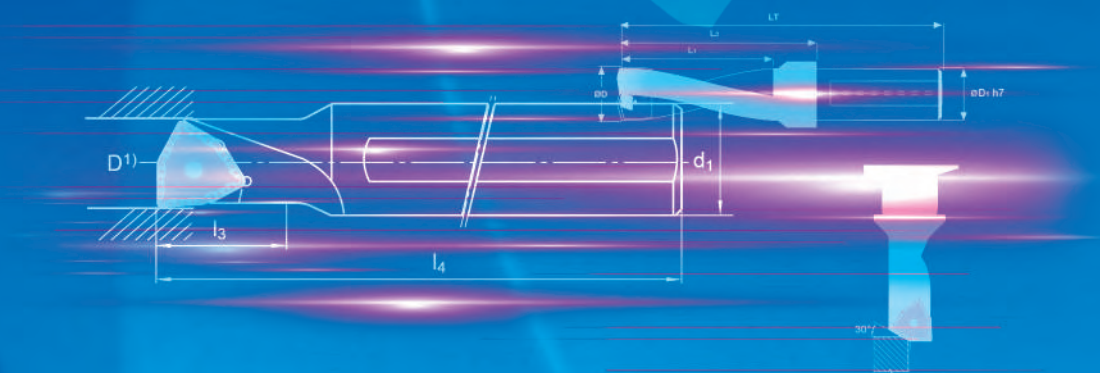

PUNTE AD INSERTI MULTIFUNZIONE

MULTIFUNKTION WENDEPLATTENVOLLBOHRER _ MULTI-FUNCTION INDEXABLE INSERT DRILLING TOOL

Technische Hinweise _ Technical hints


Nebenschneide einsetzbar

Secondary cutting edge can be used

Weitere Konstruktionsmerkmale und Vorteile

Additional features and application possibilities

Bohren ins Volle außer der Mitte, positiver Versatz
Drilling off center, positive offset

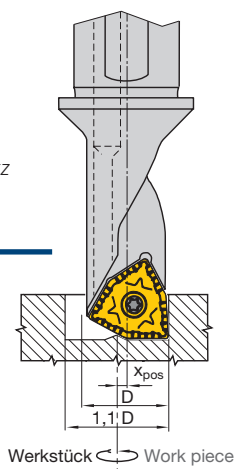

Werkstück → Work piece

x_{pos} : Versatz aus der Mitte positiv
Offset, positive


D : Nenndurchmesser Werkzeug
Nominal tool diameter

Acciaio $x_{pos} = \frac{(1,1 \times D) - D}{2}$
Stahl
Steel

Alluminio $x_{pos} = \frac{(1,5 \times D) - D}{2}$
Aluminium
Aluminium

Werkzeug Tool	D	Acciaio Stahl Steel		Alluminio Aluminium Aluminium	
		D_{max}	x_{pos}	D_{max}	x_{pos}
2,25D/1,50D					
PTR/L 08 -x,xxD- 04	08H13	8,8	0,40	12,0	2,00
PTR/L 10 -x,xxD- 05	10H13	11,0	0,50	15,0	2,50
PTR/L 11 -x,xxD- 06	11H13	12,1	0,55	16,5	2,75
PTR/L 15 -x,xxD- 07	15H13	16,5	0,75	22,5	3,75
PTR/L 18 -x,xxD- 09	18H13	19,8	0,90	27,0	4,50
PTR/L 20 -x,xxD- 10	20H13	22,0	1,00	30,0	5,00
PTR/L 26 -x,xxD- 13	26H13	28,6	1,30	39,0	6,50

Bohren ins Volle außer der Mitte, negativer Versatz
Drilling off center, negative offset

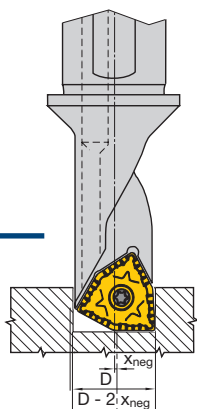

Werkstück → Work piece


x_{neg} : Versatz aus der Mitte negativ
Offset, negative

D : Nenndurchmesser Werkzeug
Nominal tool diameter


$$x_{neg} = \frac{D_{min} - D}{2}$$

Werkzeug Tool	D	D_{min}	x_{neg}
2,25D/1,50D			
PTR/L 08 -x,xxD- 04	08H13	7,8	0,10
PTR/L 10 -x,xxD- 05	10H13	9,8	0,10
PTR/L 11 -x,xxD- 06	11H13	10,8	0,10
PTR/L 15 -x,xxD- 07	15H13	14,7	0,15
PTR/L 18 -x,xxD- 09	18H13	17,7	0,15
PTR/L 20 -x,xxD- 10	20H13	19,7	0,15
PTR/L 26 -x,xxD- 13	26H13	25,7	0,15


Anfasen innen
Internal chamfering

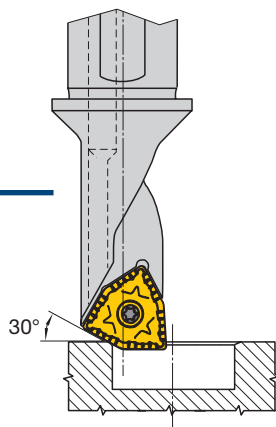

Anfasen außen
External chamfering

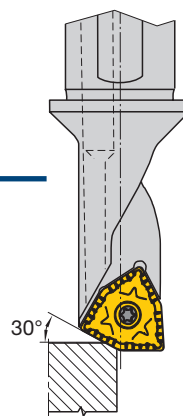

PUNTE AD INSERTI MULTIFUNZIONE
MULTIFUNKTION WENDEPLATTENVOLLBOHRER _ MULTI-FUNCTION INDEXABLE INSERT DRILLING TOOL

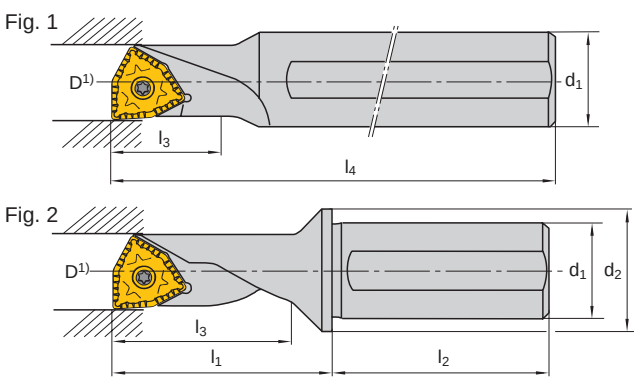

PTR/L	Fig	D ¹⁾	d ₁	d ₂	l ₁	l ₂	l ₃	l ₄		KG		STOCK	PRICELIST on getooling.com
PTR/L 08 - 1,50D-04	1	8	12	-	-	-	12,0	80	WCHX 04...	0,030		●	
PTR/L 08 - 2,25D-04	2	8	10	12	22,5	38	18,0	-		0,050		●	
PTR/L 10 - 1,50D-05	1	10	12	-	-	-	15,0	90	WCHX 05...	0,040		●	
PTR/L 10 - 2,25D-05	2	10	12	16	28	42	22,5	-		0,060		●	
PTR/L 11 - 1,50D-06	1	11	16	-	-	-	16,5	100	WCHX 06...	0,080		●	
PTR/L 11 - 2,25D-06	2	11	16	20	32	45	24,75	-		0,130		●	
PTR/L 15 - 1,50D-07	1	15	20	-	-	-	22,5	125	WCHX 07...	0,150		●	
PTR/L 15 - 2,25D-07	2	15	20	25	43	50	33,75	-		0,240		●	
PTR/L 18 - 1,50D-09	1	18	25	-	-	-	27,0	135	WCHX 09...	0,280		●	
PTR/L 18 - 2,25D-09	2	18	25	32	53	56	40,5	-		0,400		●	
PTR/L 20 - 1,50D-10	1	20	25	-	-	-	30,0	150	WCHX 10...	0,290		●	
PTR/L 20 - 2,25D-10	2	20	25	32	56	56	45,0	-		0,460		●	
PTR/L 26 - 1,50D-13	1	26	32	-	-	-	39,0	180	WCHX 13...	0,570		●	
PTR/L 26 - 2,25D-13	2	26	32	40	73	60	58,5	-		0,910		●	

RICAMBI _ Ersatzteile _ Spare parts



PTR/L			Torx Torx Torx	Momento torsione Anzugsmoment Torque [Ncm]
PTR/L 08	A02-20033	V04-T0600	06	62
PTR/L 10	A13-25042	V04-T0800	08	128
PTR/L 11	A13-25050	V04-T0800	08	128
PTR/L 15	A13-30073	V04-T0800	08	180
PTR/L 18	A02-35082	V04-T1500	15	345
PTR/L 20	A06-50088	V04-T2000	20	1020
PTR/L 26	A02-60120	V04-T2500	25	1750

INSERTI _ Wendeplatten _ Inserts

P300	K400	K15
------	------	-----





PUNTE AD INSERTI _ WENDEPLATTENVOLLBOHRER _ INDEXABLE INSERT DRILLING-TOOLS

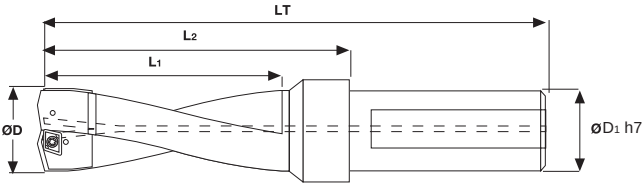

TDXP - 3 X D	(mm)											STOCK	PRICELIST on getooling.com
	Ød	ØD1	LT	L1	L2								
TDXP 140-30 R	14	20	104	43	60	XPMT 042004...	BFTX 01604N	BT06					
TDXP 150-30 R	15	20	107	46	63								
TDXP 160-30 R	16	20	110	49	66	XPMT 052804...	BFTX 0204N						
TDXP 170-30 R	17	20	113	52	69								
TDXP 180-30 R	18	20	116	55	72	XPMT 063306...	BFTX 02206N	BT07					
TDXP 190-30 R	19	25	134	58	78								
TDXP 200-30 R	20	25	137	61	81	XPMT 074006...	BFTX 02506N	BT08					
TDXP 210-30 R	21	25	140	64	84								
TDXP 220-30 R	22	25	143	67	87	XPMT 094508...	BFTX 03584	BT15					
TDXP 230-30 R	23	25	146	70	90								
TDXP 240-30 R	24	25	149	73	93	XPMT 125812...	BFTX 0511N	BT20					
TDXP 250-30 R	25	25	152	76	96								
TDXP 260-30 R	26	25	155	79	99	XPMT 156812...	BFTX 0615N	BT25					
TDXP 270-30 R	27	25	158	82	102								
TDXP 280-30 R	28	25	161	85	105	XPMT 156812...	BFTX 0615N	BT25					
TDXP 290-30 R	29	32	170	88	110								
TDXP 300-30 R	30	32	173	91	113	XPMT 156812...	BFTX 0615N	BT25					
TDXP 310-30 R	31	32	176	94	116								
TDXP 320-30 R	32	32	179	97	119	XPMT 156812...	BFTX 0615N	BT25					
TDXP 330-30 R	33	32	182	100	122								
TDXP 340-30 R	34	32	185	103	125	XPMT 156812...	BFTX 0615N	BT25					
TDXP 350-30 R	35	32	188	106	128								
TDXP 360-30 R	36	32	191	109	131	XPMT 156812...	BFTX 0615N	BT25					
TDXP 370-30 R	37	32	194	112	134								
TDXP 380-30 R	38	32	197	115	137	XPMT 156812...	BFTX 0615N	BT25					
TDXP 390-30 R	39	32	200	118	140								
TDXP 400-30 R	40	32	203	121	143	XPMT 156812...	BFTX 0615N	BT25					
TDXP 410-30 R	41	32	206	124	146								
TDXP 420-30 R	42	40	220	127	150	XPMT 156812...	BFTX 0615N	BT25					
TDXP 430-30 R	43	40	223	130	153								
TDXP 440-30 R	44	40	226	133	156	XPMT 156812...	BFTX 0615N	BT25					
TDXP 450-30 R	45	40	229	136	159								
TDXP 460-30 R	46	40	240	139	170	XPMT 156812...	BFTX 0615N	BT25					
TDXP 470-30 R	47	40	243	141	173								
TDXP 480-30 R	48	40	246	144	176	XPMT 156812...	BFTX 0615N	BT25					
TDXP 490-30 R	49	40	249	147	179								
TDXP 500-30 R	50	40	252	150	182	XPMT 156812...	BFTX 0615N	BT25					
TDXP 510-30 R	51	40	255	153	185								
TDXP 520-30 R	52	40	258	156	188	XPMT 156812...	BFTX 0615N	BT25					
TDXP 530-30 R	53	40	261	159	191								
TDXP 540-30 R	54	40	264	162	194	XPMT 156812...	BFTX 0615N	BT25					
TDXP 550-30 R	55	40	267	165	197								


PUNTE AD INSERTI _ WENDEPLATTENVOLLBOHRER _ INDEXABLE INSERT DRILLING-TOOLS

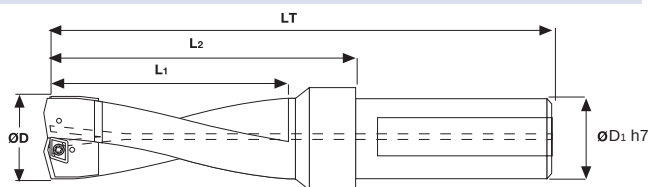

TDXP - 5 X D	(mm)					XPMT	BFTX	BT	KG	STOCK	PRICELIST on getooling.com
	Ød	ØD1	LT	L1	L2						
TDXP 140-50 R	14	20	132	71	88	XPMT 042004...	BFTX 01604N	BT06	0,420	●	
TDXP 150-50 R	15	20	137	76	93				0,420	●	
TDXP 160-50 R	16	20	142	81	98				0,420	●	
TDXP 170-50 R	17	20	147	86	103	XPMT 052804...	BFTX 0204N	BT07	0,420	●	
TDXP 180-50 R	18	20	152	91	108				0,420	●	
TDXP 190-50 R	19	25	172	96	116				0,420	●	
TDXP 200-50 R	20	25	177	101	121	XPMT 063306...	BFTX 02206N	BT07	0,500	●	
TDXP 210-50 R	21	25	182	106	126				0,550	●	
TDXP 220-50 R	22	25	187	111	131				0,550	●	
TDXP 230-50 R	23	25	192	116	136	XPMT 074006...	BFTX 02506N	BT08	0,570	●	
TDXP 240-50 R	24	25	197	121	141				0,570	●	
TDXP 250-50 R	25	25	202	126	146				0,590	●	
TDXP 260-50 R	26	25	207	131	151	XPMT 094508...	BFTX 03584	BT15	0,600	●	
TDXP 270-50 R	27	25	212	136	156				0,620	●	
TDXP 280-50 R	28	25	217	141	161				0,650	●	
TDXP 290-50 R	29	32	228	146	168	XPMT 125812...	BFTX 0511N	BT20	0,670	●	
TDXP 300-50 R	30	32	233	151	173				0,950	●	
TDXP 310-50 R	31	32	238	156	178				0,970	●	
TDXP 320-50 R	32	32	243	161	183	XPMT 156812...	BFTX 0615N	BT25	0,990	●	
TDXP 330-50 R	33	32	248	166	188				1,000	●	
TDXP 340-50 R	34	32	253	171	193				1,050	●	
TDXP 350-50 R	35	32	258	176	198	XPMT 156812...	BFTX 0615N	BT25	1,100	●	
TDXP 360-50 R	36	32	263	181	203				1,300	●	
TDXP 370-50 R	37	32	268	186	208				1,300	●	
TDXP 380-50 R	38	32	273	191	213	XPMT 156812...	BFTX 0615N	BT25	1,400	●	
TDXP 390-50 R	39	32	278	196	218				1,400	●	
TDXP 400-50 R	40	32	283	201	223				1,500	●	
TDXP 410-50 R	41	32	288	206	228	XPMT 156812...	BFTX 0615N	BT25	1,600	●	
TDXP 420-50 R	42	40	304	211	234				1,600	●	
TDXP 430-50 R	43	40	309	216	239				1,600	●	
TDXP 440-50 R	44	40	314	221	244	XPMT 156812...	BFTX 0615N	BT25	1,700	●	
TDXP 450-50 R	45	40	319	226	249				2,400	●	
TDXP 460-50 R	46	40	332	231	262				2,400	●	
TDXP 470-50 R	47	40	337	235	267	XPMT 156812...	BFTX 0615N	BT25	2,500	●	
TDXP 480-50 R	48	40	342	240	272				2,600	●	
TDXP 490-50 R	49	40	347	247	277				2,600	●	
TDXP 500-50 R	50	40	352	250	282	XPMT 156812...	BFTX 0615N	BT25	2,800	●	
TDXP 510-50 R	51	40	357	255	287				2,800	●	
TDXP 520-50 R	52	40	362	260	292				2,900	●	
TDXP 530-50 R	53	40	367	265	297	XPMT 156812...	BFTX 0615N	BT25	3,100	●	
TDXP 540-50 R	54	40	372	270	302				3,200	●	
TDXP 550-50 R	55	40	377	275	307				3,500	●	


GE DRILLS	GROOVING	MINITOLS	MICROTOOLS AMS	MOULDMILL	MINIMILL	MILLING
-----------	----------	----------	-------------------	-----------	----------	---------

NICECUT

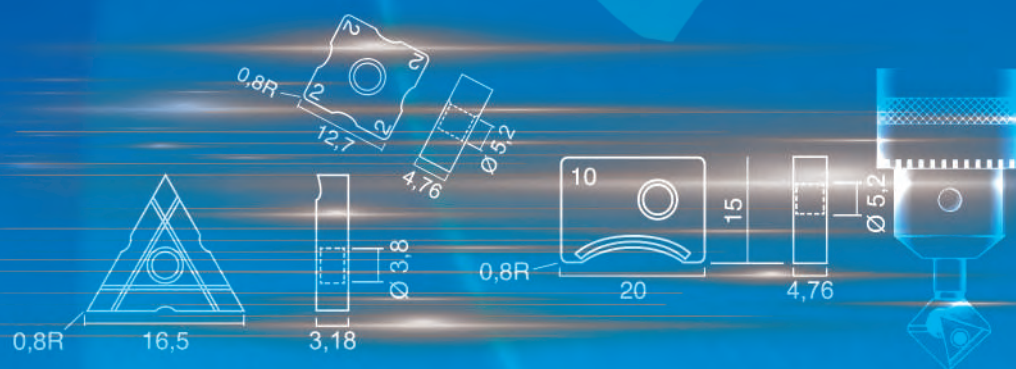

NICECUT	GE DRILLS	GROOVING	MINITOLS	MICROTOOLS AMS	MOULDMILL	MINIMILL	MILLING
---------	-----------	----------	----------	-------------------	-----------	----------	---------

SVASATORI AD INSERTO INTERCAMBIABILE
FASFRÄSER FÜR ABSCHRÄGUNG _ MILLING CUTTERS FOR CHAMFERING FLARIN

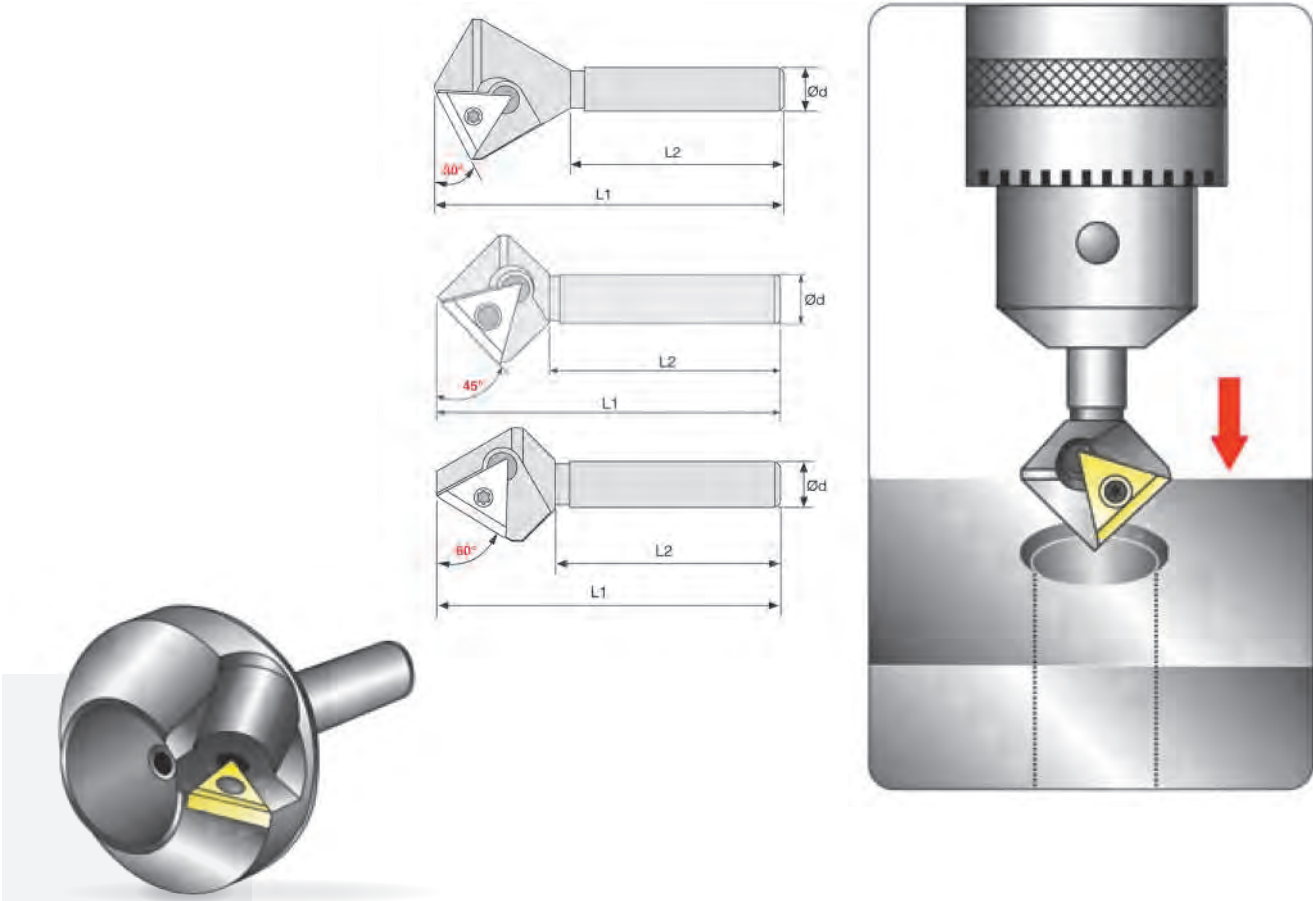


MENTRUBE	Angolo Winwel Angle	↔ (mm)		L1	L2	Ød					STOCK	PRICELIST on getooling.com
		MIN Ø	MAX Ø									
BM3029T	30°	6	29	74	45	10	TM32 GUR... TM32 GSR...	M -1	MA - 1	0,110	○	
BM4524T	45°	5	24	67	45	10				0,070	○	
BM4538T	45°	19	38	75	50	12				0,230	○	
BM4552T	45°	33	52	80	55	13				0,410	○	
BM4566T	45°	47	66	80	55	13				0,660	○	
BM6021T	60°	7	21	69	45	10				0,070	○	


	FIG.	NR. TAGLIENTI SCHNITTKANTEN NO. OF CORNERS	
		1	2
TM32 GUR HSS...	1	2	
TM32 GSR HSS...	2	6	

VELOCITÀ CONSIGLATE_SCHNITTDATEN RECOMMENDED SPEED			
	MIN Ø	MAX Ø	RPM
BM3029T	6	29	500-350
BM4524T	5	24	500-350
BM4538T	19	38	350-200
BM4552T	33	52	200-150
BM4566T	47	68	150-100
BM6021T	7	21	500-350



FRESE PER SMUSSI, SCANALATURE A V E CENTRARE
ZENTRIER-, SENK-, UND ANFASWERKZEUG _ CENTER DRILLING, CHAMFERING AND V-GROOVING

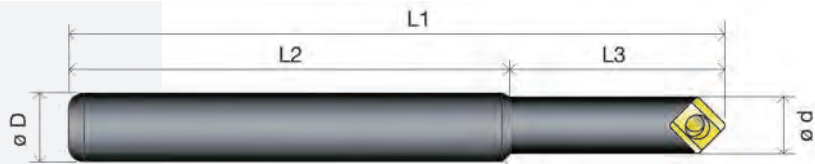

MOMIMEN	Angolo Winwel Angle	↔ (mm)				ø D	ø d	MIN ø	MAX ø					STOCK	PRICELIST on getooling.com
		L1	L2	L3											
SCM1045C	90°	105	72	33		10	8	0,6	8	C22 GUX...	L-13	N-5	0,070	○	
SCM1045CL	90°	165	132	33		10	8	0,6	8				0,120	○	
SC1245C	90°	110	82	28		12	13	0,6	13	C32 GUX...	L-6	K-3	0,110	○	
SC1645C	90°	110	82	28		16	13	0,6	13				0,180	○	
SC1630C	118°	110	82	28		16	16	0,6	16				0,130	○	
SC1660DS	60°	150	95	55		16	12	0,6	12	DCET 11X304...	L-15	N-6	0,170	○	

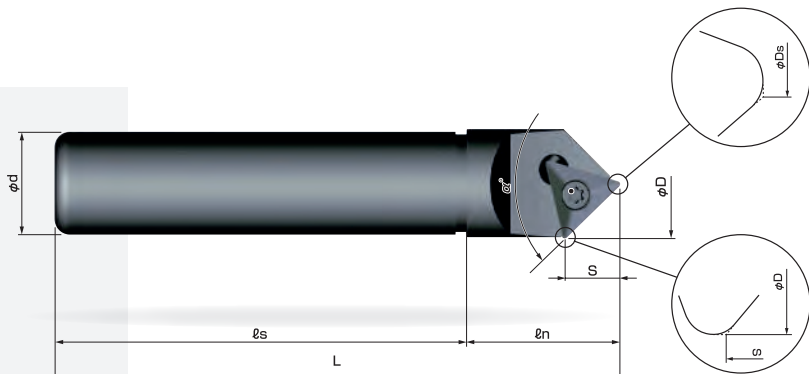

MOMIMEN	↔ (mm)												STOCK	PRICELIST on getooling.com
	ø D	ø Ds	ø d	L	Ls	Ln	S	α°						
EMS1045T	10,3	0,88	10	95	80	15	4,7	90°	TXMT 080206...	L-18	N-4	0,100	○	
EMM1245T	14,2	0,88	12	100	80	20	6,7	90°	TXMT 110306...	L-13	N-5	0,120	○	
EML2045T	22	0,88	20	110	80	30	10,5	90°	TXMT 16T306...	L-15	N-7	0,200	○	
EMD3245T	37,1	1,2	32	150	110	40	18	90°	TXMT 270506...	L-16	BT20	0,250	○	

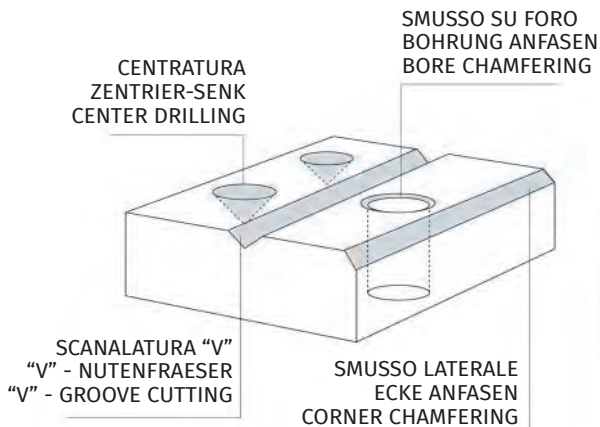

FRESE AD INSERTI PER RAGGI CONVESSI RADIEN ANFRÄSER MIT WENDEPLATTEN _ CINDEXABLE ROUND CHAMFERING MILLING-CUTTERS

MILLING

MINIMILL

MOULDMILL


MICROTOOLS
AMS

MINITOOLS


GROOVING

GE DRILLS

NICECUT

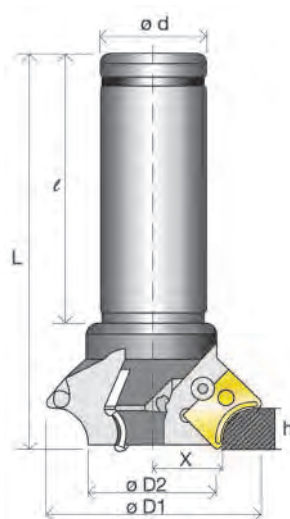

RICAMBI - ERSATZTEILE - SPARE PARTS



R-NUBOR

	Z	Ø D1	Ø D2	Ø d	L	l	KG	STOCK	PRICELIST on getooling.com
NK32-70R	3	70	42	32	130	90	1,000	○	
NK32-70RL200	3	70	42	32	200	150	1,000	○	
NK25-10R	1	35	8,9	25	120	80	0,600	○	


	Z	R	X	h
N54GCR-5R NK2020	5	22,78	6,79	
N54GCR-8R NK2020	8	22,8	9,63	
N54GCR-10R NK2020	10	22,7	11,76	
N54GCR-6R NK2020	6	22,8	6,8	
N54GCR-7R NK2020	7	22,8	9,7	
N54GCR-9R NK2020	9	22,7	11,5	

PARAMETRI DI LAVORO - CUTTING DATAS

MATERIAL	RPM	FEED
STEEL	1200 ~ 2000	200 ~ 400 mm/1'
CAST IRON	900 ~ 1200	150 ~ 300 mm/1'
ALU	1500 ~ 3000	300 ~ 500 mm/1'



RICAMBI - ERSATZTEILE - SPARE PARTS

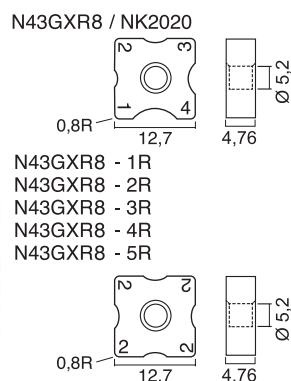

R-NUBOR

	Z	Ø D1	Ø D2	Ø d	L	l	KG	STOCK	PRICELIST on getooling.com
NK25-05R	1	26	-	25	130	90	0,420	○	
NK20-40R-2	2	56	39,3	20	115	85	0,480	○	
NK32-40R-3	3	56	39,3	32	115	85	1,000	○	


	Z	R	X	h
N43GXR8-1R NK2020	1	23,27	4,66	
N43GXR8-2R NK2020	2	22,77	5,07	
N43GXR8-3R NK2020	3	22,27	5,58	
N43GXR8-4R NK2020	4	21,81	6,08	
N43GXR8-5R NK2020	5	21,2	6,5	
N43GXR8 NK2020	1-2-3-4	21,81	6,08	

PARAMETRI DI LAVORO - CUTTING DATAS

MATERIAL	RPM	FEED
STEEL	1500 ~ 2500	300 ~ 500 mm/1'
CAST IRON	1100 ~ 1500	150 ~ 300 mm/1'
ALU	1700 ~ 3500	300 ~ 500 mm/1'



RICAMBI - ERSATZTEILE - SPARE PARTS

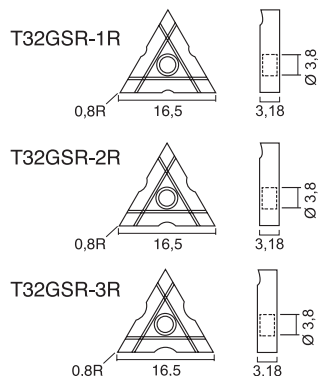

R-NUBOR

	Z	Ø D1	Ø D2	Ø d	L	l	KG	STOCK	PRICELIST on getooling.com
CR25-05T	1	25	-	25	150	100	0,530	○	

	Z	R	X	h
T32GSR-1R NK2020	1	6,52	6,02	
T32GSR-2R NK2020	2	6,05	6,53	
T32GSR-3R NK2020	3	5,61	7,01	

PARAMETRI DI LAVORO - CUTTING DATAS

MATERIAL	RPM	FEED
STEEL	2500 ~ 400	200 ~ 400 mm/1'
CAST IRON	1800 ~ 3000	150 ~ 300 mm/1'
ALU	3000 ~ 5000	300 ~ 600 mm/1'



UTENSILI AD INSERTI PER RAGGI CONVESSI
 RADIEN WERKZEUG MIT WENDEPLATTEN _ INDEXABLE ROUND CORNER CHAMFERING TOOL






(mm)

R-BIT 20XR	D1	D2	L1	Z				 KG	STOCK	PRICELIST on getooling.com
R-BIT 20XR	19	20	126	1	N43GXR	L-12	K-4	--	O	

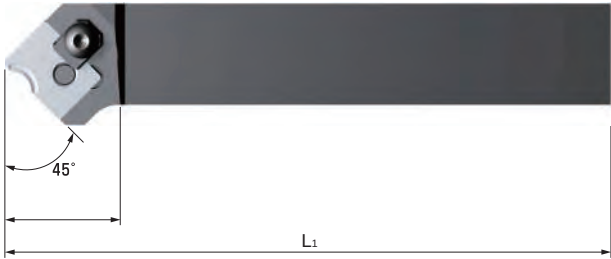
(mm)


10R-BIT 25CR	D1	D2	L1	L2	Z					 KG	STOCK	PRICELIST on getooling.com
10R-BIT 25CR	25	25	150	30	1	N54GCR	CL-1S	L-12	K-3 K-4	--	O	

YES DRILLS



YES DRILLS	NICECUT	GE DRILLS	GROOVING	MINITOLS	MICROTOOLS AMS	MOULDMILL	MINIMILL	MILLING
------------	---------	-----------	----------	----------	-------------------	-----------	----------	---------

KRUZ-FSL, YTDI-FSL Flange body & Carbide insert

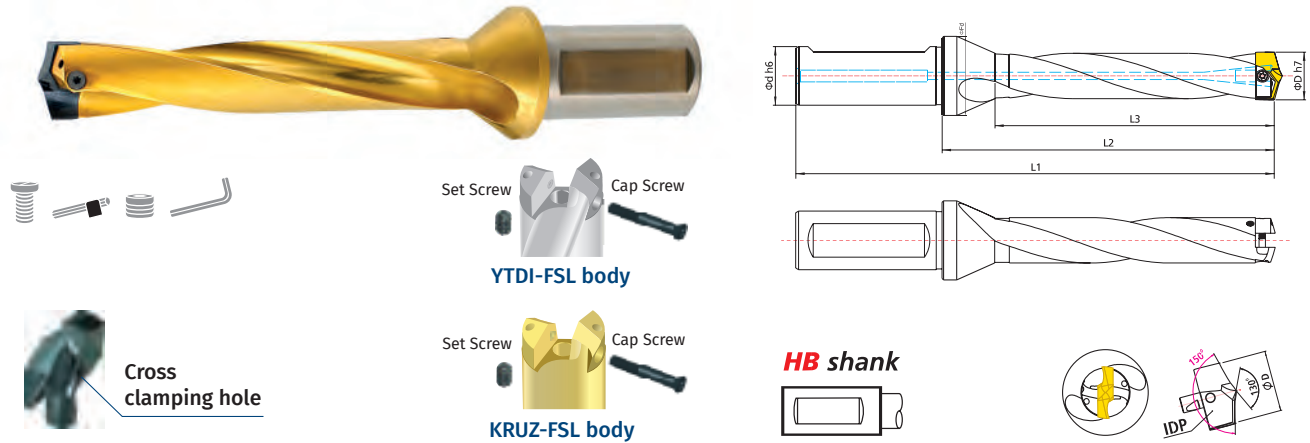

IDP Affilature \ ricopertura specifica +30% _ IDP Besondere Schliffungen \ Beschichtungen +30%_ IDP Specific grindings \ coatings +30%

KRUZ-FSL/YTDI-FSL Please make required cutting depth in the ☐ like T, P, H, L

Hole size range	Body Code No.	Shank Size (Ød)	Cutting depth (Length x 40)	L1	L2	L3	Flanged dia. (ØFd)	YTDI		KRUZ		IDP	Cap Screw	Torx driver	Set Screw	L-wrench
								STOCK	Pricelist on request	STOCK	Pricelist on request					
Ø 8.0 ~Ø 8.4	YTDI 080 ☐ FSL KRUZ 080 ☐ FSL	10,0 (HA)	T (3xD) P (5xD) H (7xD)	87 103 119	42 58 74	32 48 64	18	● ● ●		○ ○ ○		● IDP 080 ● IDP 081 ● IDP 082 ● IDP 083 ● IDP 084	CS 080-085 SL	T6 Torque 0,6Nm (Max)	-	-
Ø 8.5 ~Ø 8.9	YTDI 085 ☐ FSL KRUZ 085 ☐ FSL	10,0 (HA)	T (3xD) P (5xD) H (7xD)	89 106 123	44 61 78	34 51 68	18	● ● ●		○ ○ ○		● IDP 085 ● IDP 086 ● IDP 087 ● IDP 088 ● IDP 089	CS 080-085 SL	T6 Torque 0,6Nm (Max)	-	-
Ø 9.0 ~Ø 9.4	YTDI 090 ☐ FSL KRUZ 090 ☐ FSL	10,0 (HA)	T (3xD) P (5xD) H (7xD)	92 110 128	47 65 83	36 54 72	18	● ● ●		○ ○ ○		● IDP 090 ● IDP 091 ● IDP 092 ● IDP 093 ● IDP 094	CS 090-095 SL	T6 Torque 0,6Nm (Max)	-	-
Ø 9.5 ~Ø 9.9	YTDI 095 ☐ FSL KRUZ 095 ☐ FSL	12,0 (HA)	T (3xD) P (5xD) H (7xD)	97 116 135	49 68 87	38 57 76	18	● ● ●		○ ○ ○		● IDP 095 ● IDP 096 ● IDP 097 ● IDP 098 ● IDP 099	CS 090-095 SL	T6 Torque 0,6Nm (Max)	-	-
Ø 10.0 ~Ø 10.4	YTDI 100 ☐ FSL KRUZ 100 ☐ FSL	12,0 (HA)	T (3xD) P (5xD) H (7xD)	99 119 139	51 71 91	40 60 80	18	● ● ●		○ ○ ○		● IDP 100 ● IDP 101 ● IDP 102 ● IDP 103 ● IDP 104	CS 100-115 SL	T6 Torque 0,6Nm (Max)	-	-
Ø 10.5 ~Ø 10.9	YTDI 105 ☐ FSL KRUZ 105 ☐ FSL	12,0 (HA)	T (3xD) P (5xD) H (7xD)	102 123 144	54 75 96	42 63 84	18	● ● ●		○ ○ ○		● IDP 105 ● IDP 106 ● IDP 107 ● IDP 108 ● IDP 109	CS 100-115 SL	T6 Torque 0,6Nm (Max)	-	-
Ø 11.0 ~Ø 11.4	YTDI 110 ☐ FSL KRUZ 110 ☐ FSL	12,0 (HA)	T (3xD) P (5xD) H (7xD) L (10XD)	104 126 148 181	56 78 100 133	44 66 88 121	18	● ● ● ○		○ ○ ○ ○		● IDP 110 ● IDP 111 ● IDP 112 ● IDP 113 ● IDP 114	CS 100-115 SL	T6 Torque 0,6Nm (Max)	-	-
Ø 11.5 ~Ø 11.9	YTDI 115 ☐ FSL KRUZ 115 ☐ FSL	12,0 (HA)	T (3xD) P (5xD) H (7xD) L (10XD)	107 130 153 188	59 82 105 140	46 69 92 127	18	● ● ● ○		○ ○ ○ ○		● IDP 115 ● IDP 116 ● IDP 117 ● IDP 118 ● IDP 119	CS 100-115 SL	T6 Torque 0,6Nm (Max)	-	-
Ø 12.0 ~Ø 12.4	YTDI 120 ☐ FSL KRUZ 120 ☐ FSL	16,0	T (3xD) P (5xD) H (7xD) L (10XD)	109 133 157 193	61 85 109 145	48 72 96 132	21	● ● ● ○		○ ○ ○ ○		● IDP 120 ● IDP 121 ● IDP 122 ● IDP 123 ● IDP 124	CS 120-135 SL	T6 Torque 0,6Nm (Max)	M 2.5x4	1.3 mm

KRUZ-FSL, YTDI-FSL Flange body & Carbide insert

Hole size range	Body Code No.	Shank Size (Ød)	Cutting depth (Length x 40)	L1	L2	L3	Flanged dia. (ØFd)	YTDI	KRUZ					
								STOCK	Pricelist on request					
Ø 12.5 ~Ø 12.9	YTDI 125 □ FSL KRUZ 125 □ FSL	16.0	T (3xD)	111	63	50	21	●	○	● IDP 125 ● IDP 126 ● IDP 127 ● IDP 128 ● IDP 129	CS 120- 135 SL	T6 Torque 0,6Nm (Max)	M 2.5x4	1.3 mm
			P (5xD)	136	88	75		●	○					
			H (7xD)	161	113	100		●	○					
			L (10XD)	199	151	138		○	○					
Ø 13.0 ~Ø 13.4	YTDI 130 □ FSL KRUZ 130 □ FSL	16.0	T (3xD)	114	66	52	21	●	○	● IDP 130 ● IDP 131 ● IDP 132 ● IDP 133 ● IDP 134	CS 120- 135 SL	T6 Torque 0,6Nm (Max)	M 2.5x4	1.3 mm
			P (5xD)	140	92	78		●	○					
			H (7xD)	166	118	104		●	○					
			L (10XD)	205	157	143		○	○					
Ø 13.5 ~Ø 13.9	YTDI 135 □ FSL KRUZ 135 □ FSL	16.0	T (3xD)	116	68	54	21	●	○	● IDP 135 ● IDP 136 ● IDP 137 ● IDP 138 ● IDP 139	CS 120- 135 SL	T6 Torque 0,6Nm (Max)	M 2.5x4	1.3 mm
			P (5xD)	143	95	81		●	○					
			H (7xD)	170	122	108		●	○					
			L (10XD)	211	163	149		○	○					
Ø 14.0 ~Ø 14.4	YTDI 140 □ FSL KRUZ 140 □ FSL	16.0	T (3xD)	119	71	56	21	●	○	● IDP 140 ● IDP 141 ● IDP 142 ● IDP 143 ● IDP 144	CS 140- 155 SL	T7 Torque 0,9Nm (Max)	M 2.5x4	1.3 mm
			P (5xD)	147	99	84		●	○					
			H (7xD)	175	127	112		●	○					
			L (10XD)	217	169	154		○	○					
Ø 14.5 ~Ø 14.9	YTDI 145 □ FSL KRUZ 145 □ FSL	20.0	T (3xD)	123	73	58	27	●	○	● IDP 145 ● IDP 146 ● IDP 147 ● IDP 148 ● IDP 149	CS 140- 155 SL	T7 Torque 0,9Nm (Max)	M 2.5x4	1.3 mm
			P (5xD)	152	102	87		●	○					
			H (7xD)	181	131	116		●	○					
			L (10XD)	225	175	160		○	○					
Ø 15.0 ~Ø 15.4	YTDI 150 □ FSL KRUZ 150 □ FSL	20.0	T (3xD)	127	77	60	27	●	○	● IDP 150 ● IDP 151 ● IDP 152 ● IDP 153 ● IDP 154	CS 140- 155 SL	T7 Torque 0,9Nm (Max)	M 2.5x4	1.3 mm
			P (5xD)	157	107	90		●	○					
			H (7xD)	187	137	120		●	○					
			L (10XD)	232	182	165		○	○					
Ø 15.5 ~Ø 15.9	YTDI 155 □ FSL KRUZ 155 □ FSL	20.0	T (3xD)	130	80	62	27	●	○	● IDP 155 ● IDP 156 ● IDP 157 ● IDP 158 ● IDP 159	CS 140- 155 SL	T7 Torque 0,9Nm (Max)	M 2.5x4	1.3 mm
			P (5xD)	161	111	93		●	○					
			H (7xD)	192	142	124		●	○					
			L (10XD)	239	189	171		○	○					
Ø 16.0 ~Ø 16.4	YTDI 160 □ FSL KRUZ 160 □ FSL	20.0	T (3xD)	132	82	64	27	●	○	● IDP 160 ● IDP 161 ● IDP 162 ● IDP 163 ● IDP 164	CS 160- 175 SL	T7 Torque 0,9Nm (Max)	M 2.5x4	1.3 mm
			P (5xD)	164	114	96		●	○					
			H (7xD)	196	146	128		●	○					
			L (10XD)	244	194	176		○	○					
Ø 16.5 ~Ø 16.9	YTDI 165 □ FSL KRUZ 165 □ FSL	20.0	T (3xD)	135	85	66	27	●	○	● IDP 165 ● IDP 166 ● IDP 167 ● IDP 168 ● IDP 169	CS 160- 175 SL	T7 Torque 0,9Nm (Max)	M 2.5x4	1.3 mm
			P (5xD)	168	118	99		●	○					
			H (7xD)	201	151	132		●	○					
			L (10XD)	251	201	182		○	○					
Ø 17.0 ~Ø 17.4	YTDI 170 □ FSL KRUZ 170 □ FSL	20.0	T (3xD)	137	87	68	27	●	○	● IDP 170 ● IDP 171 ● IDP 172 ● IDP 173 ● IDP 174	CS 160- 175 SL	T7 Torque 0,9Nm (Max)	M 2.5x4	1.3 mm
			P (5xD)	171	121	102		●	○					
			H (7xD)	205	155	136		●	○					
			L (10XD)	256	206	187		○	○					
Ø 17.5 ~Ø 17.9	YTDI 175 □ FSL KRUZ 175 □ FSL	20.0	T (3xD)	139	89	70	27	●	○	● IDP 175 ● IDP 176 ● IDP 177 ● IDP 178 ● IDP 179	CS 160- 175 SL	T7 Torque 0,9Nm (Max)	M 2.5x4	1.3 mm
			P (5xD)	174	124	105		●	○					
			H (7xD)	209	159	140		●	○					
			L (10XD)	262	212	193		○	○					
Ø 18.0 ~Ø 18.4	YTDI 180 □ FSL KRUZ 180 □ FSL	20.0	T (3xD)	142	92	72	27	●	○	● IDP 180 ● IDP 181 ● IDP 182 ● IDP 183 ● IDP 184	CS 180- 195 SL	T8 Torque 1,5Nm (Max)	M 2.5x4	1.3 mm
			P (5xD)	178	128	108		●	○					
			H (7xD)	214	164	144		●	○					
			L (10XD)	268	218	198		○	○					
Ø 18.5 ~Ø 18.9	YTDI 185 □ FSL KRUZ 185 □ FSL	20.0	T (3xD)	144	94	74	27	●	○	● IDP 185 ● IDP 186 ● IDP 187 ● IDP 188 ● IDP 189	CS 180- 195 SL	T8 Torque 1,5Nm (Max)	M 2.5x4	1.3 mm
			P (5xD)	181	131	111		●	○					
			H (7xD)	218	168	148		●	○					
			L (10XD)	274	224	204		○	○					
Ø 19.0 ~Ø 19.4	YTDI 190 □ FSL KRUZ 190 □ FSL	20.0	T (3xD)	147	97	76	27	●	○	● IDP 190 ● IDP 191 ● IDP 192 ● IDP 193 ● IDP 194	CS 180- 195 SL	T8 Torque 1,5Nm (Max)	M 2.5x4	1.3 mm
			P (5xD)	185	135	114		●	○					
			H (7xD)	223	173	152		●	○					
			L (10XD)	280	230	209		○	○					
Ø 19.5 ~Ø 19.9	YTDI 195 □ FSL KRUZ 195 □ FSL	20.0	T (3xD)	149	99	78	27	●	○	● IDP 195 ● IDP 196 ● IDP 197 ● IDP 198 ● IDP 199	CS 180- 195 SL	T8 Torque 1,5Nm (Max)	M 2.5x4	1.3 mm
			P (5xD)	188	138	117		●	○					
			H (7xD)	227	177	156		●	○					
			L (10XD)	286	236	215		○	○					
Ø 20.0 ~Ø 20.4	YTDI 200 □ FSL KRUZ 200 □ FSL	25.0	T (3xD)	157	101	80	32	●	○	● IDP 200 ○ IDP 201 ○ IDP 202 ○ IDP 203 ○ IDP 204	CS 200- 215 SL	T8 Torque 1,5Nm (Max)	M 3x6	1.5 mm
			P (5xD)	197	141	120		●	○					
			H (7xD)	237	181	160		●	○					
			L (10XD)	297	241	220		○	○					

KRUZ-FSL, YTDI-FSL Flange body & Carbide insert

Hole size range	Body Code No.	Shank Size (Ød)	Cutting depth (Length x 40)	L1	L2	L3	Flanged dia. (ØFd)	YTDI		KRUZ		IDP	Cap Screw	Torx driver	Set Screw	L-wrench
								STOCK	Pricelist on request	STOCK	Pricelist on request					
Ø 20.5 ~Ø 20.9	YTDI 205 □ FSL KRUZ 205 □ FSL	25.0	T (3xD) P (5xD) H (7xD) L (10XD)	160 201 242 304	104 145 186 248	82 123 164 226	32	● ● ● ○		○ ○ ○ ○		● IDP 205 ○ IDP 206 ○ IDP 207 ○ IDP 208 ○ IDP 209	CS 200-215 SL	T8 Torque 1.5Nm (Max)	M 3x6	1.5 mm
Ø 21.0 ~Ø 21.4	YTDI 210 □ FSL KRUZ 210 □ FSL	25.0	T (3xD) P (5xD) H (7xD) L (10XD)	162 204 246 309	106 148 190 253	84 126 168 231	32	● ● ○ ○		○ ○ ○ ○		● IDP 210 ○ IDP 211 ○ IDP 212 ○ IDP 213 ○ IDP 214	CS 200-215 SL	T8 Torque 1.5Nm (Max)	M 3x6	1.5 mm
Ø 21.5 ~Ø 21.9	YTDI 215 □ FSL KRUZ 215 □ FSL	25.0	T (3xD) P (5xD) H (7xD) L (10XD)	165 208 251 316	109 152 195 260	86 129 172 237	32	● ● ○ ○		○ ○ ○ ○		● IDP 215 ○ IDP 216 ○ IDP 217 ○ IDP 218 ○ IDP 219	CS 200-215 SL	T8 Torque 1.5Nm (Max)	M 3x6	1.5 mm
Ø 22.0 ~Ø 22.4	YTDI 220 □ FSL KRUZ 220 □ FSL	25.0	T (3xD) P (5xD) H (7xD) L (10XD)	167 211 255 321	111 155 199 265	88 132 176 242	32	● ● ○ ○		○ ○ ○ ○		● IDP 220 ○ IDP 221 ○ IDP 222 ○ IDP 223 ○ IDP 224	CS 220-235 SL	T8 Torque 1.5Nm (Max)	M 3x6	1.5 mm
Ø 22.5 ~Ø 22.9	YTDI 225 □ FSL KRUZ 225 □ FSL	25.0	T (3xD) P (5xD) H (7xD) L (10XD)	169 214 259 327	113 158 203 271	90 135 180 248	32	● ● ○ ○		○ ○ ○ ○		● IDP 225 ○ IDP 226 ○ IDP 227 ○ IDP 228 ○ IDP 229	CS 220-235 SL	T8 Torque 1.5Nm (Max)	M 3x6	1.5 mm
Ø 23.0 ~Ø 23.4	YTDI 230 □ FSL KRUZ 230 □ FSL	25.0	T (3xD) P (5xD) H (7xD) L (10XD)	172 218 264 333	116 162 208 277	92 138 184 253	32	● ● ○ ○		○ ○ ○ ○		● IDP 230 ○ IDP 231 ○ IDP 232 ○ IDP 233 ○ IDP 234	CS 220-235 SL	T8 Torque 1.5Nm (Max)	M 3x6	1.5 mm
Ø 23.5 ~Ø 23.9	YTDI 235 □ FSL KRUZ 235 □ FSL	25.0	T (3xD) P (5xD) H (7xD) L (10XD)	174 221 268 339	118 165 212 283	94 141 188 259	32	● ● ○ ○		○ ○ ○ ○		● IDP 235 ○ IDP 236 ○ IDP 237 ○ IDP 238 ○ IDP 239	CS 220-235 SL	T8 Torque 1.5Nm (Max)	M 3x6	1.5 mm
Ø 24.0 ~Ø 24.4	YTDI 240 □ FSL KRUZ 240 □ FSL	32.0	T (3xD) P (5xD) H (7xD) L (10XD)	181 229 277 349	121 169 217 289	96 144 192 264	39	● ● ○ ○		○ ○ ○ ○		● IDP 240 ○ IDP 241 ○ IDP 242 ○ IDP 243 ○ IDP 244	CS 240-255 SL	T15 Torque 3,5Nm (Max)	M 3x6	1.5 mm
Ø 24.5 ~Ø 24.9	YTDI 245 □ FSL KRUZ 245 □ FSL	32.0	T (3xD) P (5xD) H (7xD) L (10XD)	183 232 281 355	123 172 221 295	98 147 196 270	39	● ● ○ ○		○ ○ ○ ○		● IDP 245 ○ IDP 246 ○ IDP 247 ○ IDP 248 ○ IDP 249	CS 240-255 SL	T15 Torque 3,5Nm (Max)	M 3x6	1.5 mm
Ø 25.0 ~Ø 25.4	YTDI 250 □ FSL KRUZ 250 □ FSL	32.0	T (3xD) P (5xD) H (7xD) L (10XD)	185 235 285 360	125 175 225 300	100 150 200 275	39	● ● ○ ○		○ ○ ○ ○		● IDP 250 ○ IDP 251 ○ IDP 252 ○ IDP 253 ○ IDP 254	CS 240-255 SL	T15 Torque 3,5Nm (Max)	M 3x6	1.5 mm
Ø 25.5 ~Ø 25.9	YTDI 255 □ FSL KRUZ 255 □ FSL	32.0	T (3xD) P (5xD) H (7xD) L (10XD)	188 239 290 367	128 179 230 307	102 153 204 281	39	● ● ○ ○		○ ○ ○ ○		● IDP 255 ○ IDP 256 ○ IDP 257 ○ IDP 258 ○ IDP 259	CS 240-255 SL	T15 Torque 3,5Nm (Max)	M 3x6	1.5 mm
Ø 26.0 ~Ø 26.4	YTDI 260 □ FSL KRUZ 260 □ FSL	32.0	T (3xD) P (5xD) H (7xD) L (10XD)	190 242 294 372	130 182 234 312	104 156 208 286	39	● ● ○ ○		○ ○ ○ ○		● IDP 260 ○ IDP 261 ○ IDP 262 ○ IDP 263 ○ IDP 264	CS 260-275 SL	T15 Torque 3,5Nm (Max)	M 3x6	1.5 mm
Ø 26.5 ~Ø 26.9	YTDI 265 □ FSL KRUZ 265 □ FSL	32.0	T (3xD) P (5xD) H (7xD) L (10XD)	193 246 299 379	133 186 239 319	106 159 212 292	39	● ● ○ ○		○ ○ ○ ○		● IDP 265 ○ IDP 266 ○ IDP 267 ○ IDP 268 ○ IDP 269	CS 260-275 SL	T15 Torque 3,5Nm (Max)	M 3x6	1.5 mm
Ø 27.0 ~Ø 27.4	YTDI 270 □ FSL KRUZ 270 □ FSL	32.0	T (3xD) P (5xD) H (7xD) L (10XD)	195 249 303 384	135 189 243 324	108 162 216 297	39	● ● ○ ○		○ ○ ○ ○		● IDP 270 ○ IDP 271 ○ IDP 272 ○ IDP 273 ○ IDP 274	CS 260-275 SL	T15 Torque 3,5Nm (Max)	M 4x8	2.0 mm
Ø 27.5 ~Ø 27.9	YTDI 275 □ FSL KRUZ 275 □ FSL	32.0	T (3xD) P (5xD) H (7xD) L (10XD)	197 252 307 390	137 192 247 330	110 165 220 303	39	● ● ○ ○		○ ○ ○ ○		● IDP 275 ○ IDP 276 ○ IDP 277 ○ IDP 278 ○ IDP 279	CS 260-275 SL	T15 Torque 3,5Nm (Max)	M 4x8	2.0 mm
Ø 28.0 ~Ø 28.4	YTDI 280 □ FSL KRUZ 280 □ FSL	32.0	T (3xD) P (5xD) H (7xD) L (10XD)	200 256 312 396	140 196 252 336	112 168 224 308	39	● ● ○ ○		○ ○ ○ ○		● IDP 280 ○ IDP 281 ○ IDP 282 ○ IDP 283 ○ IDP 284	CS 280-295 SL	T15 Torque 3,5Nm (Max)	M 4x8	2.0 mm

KRUZ-FSL, YTDI-FSL Flange body & Carbide insert

Hole size range	Body Code No.	Shank Size (ød)	Cutting depth (Length x 40)	L1	L2	L3	Flanged dia. (ØFd)	YTDI		KRUZ			IDP				
								STOCK	Pricelist on request	STOCK	Pricelist on request						
ø 28.5 ~ø 28.9	YTDI 285 □ FSL KRUZ 285 □ FSL	32.0	T (3xD)	202	142	114	39	●		○		● IDP 285 ○ IDP 286 ○ IDP 287 ○ IDP 288 ○ IDP 289	CS 280- 295 SL	T15 Torque 3.5Nm (Max)	M 4x8	2.0 mm	
			P (5xD)	259	199	171											
			H (7xD)	316	256	228											
			L (10XD)	402	342	314											
				○	○												
ø 29.0 ~ø 29.4	YTDI 290 □ FSL KRUZ 290 □ FSL	32.0	T (3xD)	205	145	116	39	●		○		● IDP 290 ○ IDP 291 ○ IDP 292 ○ IDP 293 ○ IDP 294	CS 280- 295 SL	T15 Torque 3.5Nm (Max)	M 4x8	2.0 mm	
			P (5xD)	263	203	174											
			H (7xD)	321	261	232											
			L (10XD)	408	348	319											
				○	○												
ø 29.5 ~ø 29.9	YTDI 295 □ FSL KRUZ 295 □ FSL	32.0	T (3xD)	207	147	118	39	●		○		● IDP 295 ○ IDP 296 ○ IDP 297 ○ IDP 298 ○ IDP 299	CS 280- 295 SL	T15 Torque 3.5Nm (Max)	M 4x8	2.0 mm	
			P (5xD)	266	206	177											
			H (7xD)	325	265	236											
			L (10XD)	414	354	325											
				○	○												
ø 30.0 ~ø 30.4	YTDI 300 □ FSL KRUZ 300 □ FSL	32.0	T (3xD)	209	149	120	39	●		○		● IDP 300 ○ IDP 301 ○ IDP 302 ○ IDP 303 ○ IDP 304	CS 300- 315 SL	T20 Torque 4.0 Nm (Max)	M 4x8	2.0 mm	
			P (5xD)	269	209	180											
			H (7xD)	329	269	240											
			L (10XD)	419	359	330											
				○	○												
ø 30.5 ~ø 30.9	YTDI 305 □ FSL KRUZ 305 □ FSL	32.0	T (3xD)	212	152	122	39	●		○		○ IDP 305 ○ IDP 306 ○ IDP 307 ○ IDP 308 ○ IDP 309	CS 300- 315 SL	T20 Torque 4.0 Nm (Max)	M 4x8	2.0 mm	
			P (5xD)	273	213	183											
			H (7xD)	334	274	244											
			L (10XD)	426	366	336											
				○	○												
ø 31.0 ~ø 31.4	YTDI 310 □ FSL KRUZ 310 □ FSL	32.0	T (3xD)	214	154	124	39	●		○		○ IDP 310 ○ IDP 311 ○ IDP 312 ○ IDP 313 ○ IDP 314	CS 300- 315 SL	T20 Torque 4.0 Nm (Max)	M 5x10	2.5 mm	
			P (5xD)	276	216	186											
			H (7xD)	338	278	248											
			L (10XD)	431	371	341											
				○	○												
ø 31.5 ~ø 31.9	YTDI 315 □ FSL KRUZ 315 □ FSL	32.0	T (3xD)	217	157	126	39	●		○		○ IDP 315 ○ IDP 316 ○ IDP 317 ○ IDP 318 ○ IDP 319	CS 300- 315 SL	T20 Torque 4.0 Nm (Max)	M 5x10	2.5 mm	
			P (5xD)	280	220	189											
			H (7xD)	343	283	252											
			L (10XD)	438	378	347											
				○	○												
ø 32.0 ~ø 32.4	YTDI 320 □ FSL KRUZ 320 □ FSL	32.0	T (3xD)	219	159	128	39	●		○		○ IDP 320 ○ IDP 321 ○ IDP 322 ○ IDP 323 ○ IDP 324	CS 320- 355 SL	T20 Torque 4.0 Nm (Max)	M 5x10	2.5 mm	
			P (5xD)	283	223	192											
			H (7xD)	347	287	256											
			L (10XD)	443	383	352											
				○	○												
ø 32.5 ~ø 32.9	YTDI 325 □ FSL KRUZ 325 □ FSL	32.0	T (3xD)	221	161	130	39	●		○		○ IDP 325 ○ IDP 326 ○ IDP 327 ○ IDP 328 ○ IDP 329	CS 320- 355 SL	T20 Torque 4.0 Nm (Max)	M 5x10	2.5 mm	
			P (5xD)	286	226	195											
			H (7xD)	351	291	260											
			L (10XD)	449	389	358											
				○	○												
ø 33.0 ~ø 33.4	YTDI 330 □ FSL KRUZ 330 □ FSL	32.0	T (3xD)	224	164	132	39	●		○		○ IDP 330 ○ IDP 331 ○ IDP 332 ○ IDP 333 ○ IDP 334	CS 320- 355 SL	T20 Torque 4.0 Nm (Max)	M 5x10	2.5 mm	
			P (5xD)	290	230	198											
			H (7xD)	356	296	264											
			L (10XD)	455	395	363											
				○	○												
ø 33.5 ~ø 33.9	YTDI 335 □ FSL KRUZ 335 □ FSL	32.0	T (3xD)	226	166	134	39	●		○		○ IDP 335 ○ IDP 336 ○ IDP 337 ○ IDP 338 ○ IDP 339	CS 320- 355 SL	T20 Torque 4.0 Nm (Max)	M 5x10	2.5 mm	
			P (5xD)	293	233	201											
			H (7xD)	360	300	268											
			L (10XD)	461	401	369											
				○	○												
ø 34.0 ~ø 34.4	YTDI 340 □ FSL KRUZ 340 □ FSL	40.0	T (3xD)	239	169	136	55	●		○		○ IDP 340 ○ IDP 341 ○ IDP 342 ○ IDP 343 ○ IDP 344	CS 320- 355 SL	T20 Torque 4.0 Nm (Max)	M 5x10	2.5 mm	
			P (5xD)	307	237	204											
			H (7xD)	375	305	272											
			L (10XD)	477	407	374											
				○	○												
ø 34.5 ~ø 34.9	YTDI 345 □ FSL KRUZ 345 □ FSL	40.0	T (3xD)	241	171	138	55	○		○		○ IDP 345 ○ IDP 346 ○ IDP 347 ○ IDP 348 ○ IDP 349	CS 320- 355 SL	T20 Torque 4.0 Nm (Max)	M 5x10	2.5 mm	
			P (5xD)	310	240	207											
			H (7xD)	379	309	276											
			L (10XD)	483	413	380											
				○	○												
ø 35.0 ~ø 35.4	YTDI 350 □ FSL KRUZ 350 □ FSL	40.0	T (3xD)	243	173	140	55	○		○		○ IDP 350 ○ IDP 351 ○ IDP 352 ○ IDP 353 ○ IDP 354	CS 320- 355 SL	T20 Torque 4.0 Nm (Max)	M 5x10	2.5 mm	
			P (5xD)	313	243	210											
			H (7xD)	383	313	280											
			L (10XD)	488	418	385											
				○	○												
ø 35.5 ~ø 35.9	YTDI 355 □ FSL KRUZ 355 □ FSL	40.0	T (3xD)	246	176	142	55	○		○		○ IDP 355 ○ IDP 356 ○ IDP 357 ○ IDP 358 ○ IDP 359	CS 320- 355 SL	T20 Torque 4.0 Nm (Max)	M 5x10	2.5 mm	
			P (5xD)	317	247	213											
			H (7xD)	388	318	284											
			L (10XD)	495	425	391											
				○	○												
ø 36.0 ~ø 36.4	YTDI 360 □ FSL KRUZ 360 □ FSL	40.0	T (3xD)	248	178	144	55	○		○		○ IDP 360 ○ IDP 361 ○ IDP 362 ○ IDP 363 ○ IDP 364	CS 360- 395 SL	T20 Torque 4.0 Nm (Max)	M 5x10	2.5 mm	
			P (5xD)	320	250	216											
			H (7xD)	392	322	288											
			L (10XD)	500	430	396											
				○	○												

MILLING

MINIMILL

OULD MILL

AMS

INITIOLS

ROOVING

AGE DRILLS

NICE CUT

YES DRILLS:

KRUZ-FSL, YTDI-FSL Flange body & Carbide insert


Hole size range	Body Code No.	Shank Size (ϕ d)	Cutting depth (Length x 40)	L1	L2	L3	Flanged dia. (ϕ Fd)	YTDI		KRUZ		IDP				
								STOCK	Pricelist on request	STOCK	Pricelist on request					
ϕ 44.5 ~ ϕ 44.9	YTDI 445  FSL KRUZ 445  FSL	40.0	T (3xD) P (5xD) H (7xD) L (10xD)	289 378 467 601	219 308 397 531	178 267 356 490	55	   		   		     	CS 400- 445 SL	T20 Torque 4.0Nm (Max)	M 6x12	3.0 mm
ϕ 45.0 ~ ϕ 45.4	YTDI 450  FSL KRUZ 450  FSL	40.0	T (3xD) P (5xD) H (7xD) L (10xD)	291 381 471 606	221 311 401 536	180 270 360 495	55	   		   		    	CS 450- 500 SL	T20 Torque 4.0Nm (Max)	M 6x12	3.0 mm
ϕ 45.5 ~ ϕ 45.9	YTDI 455  FSL KRUZ 455  FSL	40.0	T (3xD) P (5xD) H (7xD) L (10xD)	294 385 476 613	224 315 406 543	182 273 364 501	55	   		   		    	CS 450- 500 SL	T20 Torque 4.0Nm (Max)	M 6x12	3.0 mm
ϕ 46.0 ~ ϕ 46.4	YTDI 460  FSL KRUZ 460  FSL	40.0	T (3xD) P (5xD) H (7xD) L (10xD)	296 388 480 618	226 318 410 548	184 276 368 506	55	   		   		    	CS 450- 500 SL	T20 Torque 4.0Nm (Max)	M 6x12	3.0 mm
ϕ 46.5 ~ ϕ 46.9	YTDI 465  FSL KRUZ 465  FSL	40.0	T (3xD) P (5xD) H (7xD) L (10xD)	299 392 485 625	229 322 415 555	186 279 372 512	55	   		   		    	CS 450- 500 SL	T20 Torque 4.0Nm (Max)	M 6x12	3.0 mm
ϕ 47.0 ~ ϕ 47.4	YTDI 470  FSL KRUZ 470  FSL	40.0	T (3xD) P (5xD) H (7xD) L (10xD)	301 395 489 630	231 325 419 560	188 282 376 517	55	   		   		    	CS 450- 500 SL	T20 Torque 4.0Nm (Max)	M 6x12	3.0 mm
ϕ 47.5 ~ ϕ 47.9	YTDI 475  FSL KRUZ 475  FSL	40.0	T (3xD) P (5xD) H (7xD) L (10xD)	303 398 493 636	233 328 423 566	190 285 380 523	55	   		   		    	CS 450- 500 SL	T20 Torque 4.0Nm (Max)	M 6x12	3.0 mm
ϕ 48.0 ~ ϕ 48.4	YTDI 480  FSL KRUZ 480  FSL	40.0	T (3xD) P (5xD) H (7xD) L (10xD)	306 402 498 642	236 332 428 572	192 288 384 528	55	   		   		    	CS 450- 500 SL	T20 Torque 4.0Nm (Max)	M 6x12	3.0 mmv
ϕ 48.5 ~ ϕ 48.9	YTDI 485  FSL KRUZ 485  FSL	40.0	T (3xD) P (5xD) H (7xD) L (10xD)	308 405 502 648	238 335 432 578	194 291 388 534	55	   		   		    	CS 450- 500 SL	T20 Torque 4.0Nm (Max)	M 6x12	3.0 mm
ϕ 49.0 ~ ϕ 49.4	YTDI 490  FSL KRUZ 490  FSL	40.0	T (3xD) P (5xD) H (7xD) L (10xD)	311 409 507 654	241 339 437 584	196 294 392 539	55	   		   		    	CS 450- 500 SL	T20 Torque 4.0Nm (Max)	M 6x12	3.0 mm
ϕ 49.5 ~ ϕ 49.9	YTDI 495  FSL KRUZ 495  FSL	40.0	T (3xD) P (5xD) H (7xD) L (10xD)	313 412 511 660	243 342 441 590	198 297 396 545	55	   		   		    	CS 450- 500 SL	T20 Torque 4.0Nm (Max)	M 6x12	3.0 mm
ϕ 50.0 ~ ϕ 50.4	YTDI 500  FSL KRUZ 500  FSL	40.0	T (3xD) P (5xD) H (7xD) L (10xD)	315 415 515 665	245 345 445 595	200 300 400 550	55	   		   		    	CS 450- 500 SL	T20 Torque 4.0Nm (Max)	M 6x12	3.0 mm

KRUZ-FSL Drills, Cutting Speed Recommendation

Material group	DRILL. DIAM									
	ϕ 8~16 mm		ϕ 16~25 mm		ϕ 25~32 mm		ϕ 32~40 mm		ϕ 40~50 mm	
	Speed (m/min)	Feed (mm/rev)	Speed (m/min)	Feed (mm/rev)	Speed (m/min)	Feed (mm/rev)	Speed (m/min)	Feed (mm/rev)	Speed (m/min)	Feed (mm/rev)
Grey cast iron (FC)	80~150	0.20~0.30	80~150	0.25~0.45	80~160	0.35~0.55	90~200	0.34~0.58	90~200	0.38~0.60
Nodular cast iron (FCD)	80~140	0.15~0.25	80~140	0.22~0.45	80~150	0.32~0.52	90~180	0.35~0.62	90~200	0.38~0.60
Carbon steel (S45C)	80~140	0.15~0.30	80~140	0.16~0.40	80~150	0.20~0.40	80~150	0.22~0.48	80~160	0.25~0.54
Alloy steel (SCM440)	70~140	0.15~0.30	70~140	0.15~0.40	70~140	0.18~0.40	80~140	0.25~0.47	80~140	0.27~0.52
Hardened steel (SKD11)	40~50	0.10~0.20	40~50	0.12~0.28	40~50	0.16~0.35	40~60	0.20~0.38	40~60	0.22~0.42
Stainless steel (SUS)	30~40	0.10~0.20	35~50	0.10~0.22	35~50	0.15~0.28	40~55	0.18~0.30	40~55	0.22~0.32
Alluminium 13HB (AL)	120~200	0.20~0.30	120~200	0.25~0.40	120~200	0.30~0.45	120~200	0.30~0.45	120~200	0.30~0.50

- This data is recommended for 3xDia, and should be reduced about 15-20% for 5xD, 7xD, 10xD drills.
- The data is normally suggested for oil-mist(MQL) coolant condition and also possible to run in other normal condition if machining environment like clamping etc. are secured in good.

SLIM CHUCK

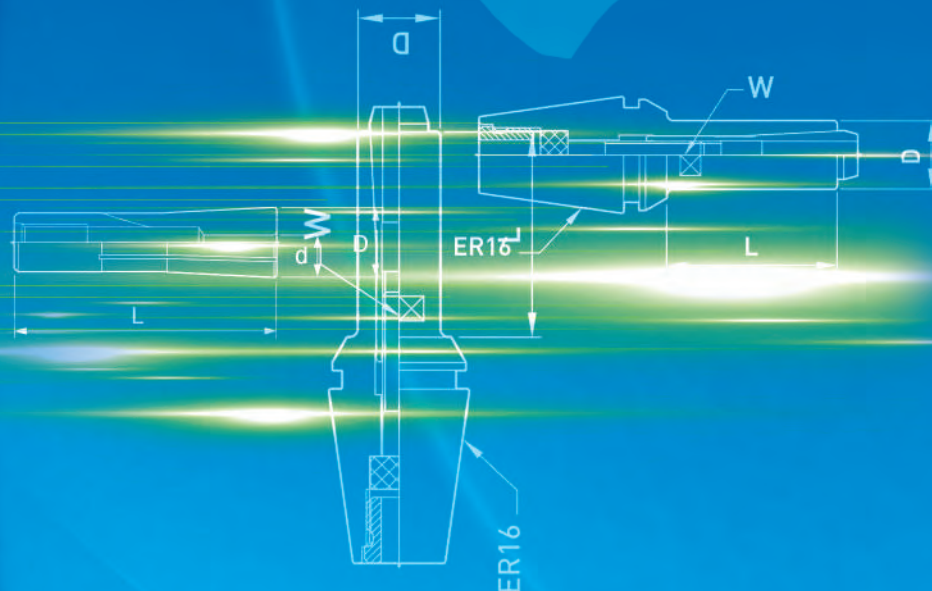

SLIM CHUCK	YES DRILLS	NICECUT	GE DRILLS	GROOVING	MICROTOOLS AMS	MICROTOOLS	MOULDMILL	MINIMILL	MILLING
------------	------------	---------	-----------	----------	-------------------	------------	-----------	----------	---------

MANDRINO A PINZA SLIM CHUCK
SLIM CHUCK SPANNZANGENAUFNAHME _ SLIM CHUCK EXTENSION ADAPTOR



Mandrino a pinza progettato senza ghiera, parte da un diametro di 8,6mm. In questo modo si raggiunge l'effetto migliore nel processo di estensione.

Spannzangenaufnahme ohne Oberwurfmutter, mindest Durchmesser 8,6mm. In dieser Weise, erreicht man den besten Effekt mit der Verlängerung.

Slim collet chuck designed without nut can get the smallest outside diameter of 8.6 mm. This can achieve the best effect on extended processing depth.



Fig. 1



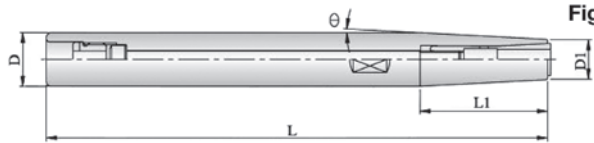


Fig. 2


ST	Fig.	 (mm)							Pinza Spannzange Collet	Chiave Schlüssel Spanner	Vite Schraube Screw	Bussola Schraube Stop Screw	Estrattore Auszieher Stop Nut	STOCK	PRICELIST on getooling.com
		d	L	L1	D	D1	?								
ST10-DC4-90	1	2-4	90	14	10	9	-	DC4	30194-632(M3)	M4L70	-	TP-M8	○		
ST12-DC4-120	2	2-4	120	38	12	9	3°	DC4	30194-632(M3)	M4L85	OP-M8	-	○		
ST12-DC6-120	1	1-6	120	40	12	14	-	DC6	30194-643(M4)	M5L95	-	TP-M12	○		
ST16-DC6-150	2	1-6	150	35	16	14	3°	DC6	30194-643(M4)	M5L100	OP-M10	-	○		
ST20-DC6-200	2	1-6	200	70	20	14	3°	DC6	30194-643(M4)	M5L100	OP-M10	-	○		
ST25-DC6-250	2	1-6	250	115	25	14	3°	DC6	30194-644(M4)	M5L100	OP-M10	-	○		
ST20-DC8-200	2	3-8	200	50	20	19	2°	DC8	30194-652(M5)	-	OP-M12	-	○		



ER	d	↔ (mm)			Pinza Spannzange Collet	Chiave Schlüssel Spanner	STOCK	PRICELIST on getooling.com
		L	D	W				
ER16-DC4-25	2-4	25	9	8	DC4	30194-632(M3)	○	
ER20-DC6-35	1-6	35	14	13	DC6	30194-643(M4)	○	

PINZE DC TIPO E


DC SPANNZANGEN TYPE E _ DC COLLETS TYPE E

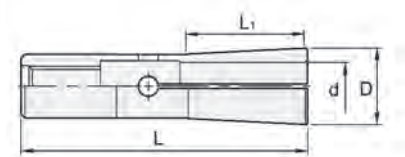

DC...E	d	L	(mm)	D	W	STOCK	PRICELIST on getooling.com
DC4-2E	2	31		10	7	○	
DC4-3E	3	31		14	7	○	
DC4-4E	4	31		14	7	○	
DC6-3E	3	36		14	9,6	○	
DC6-4E	4	36		14	9,6	○	
DC6-6E	6	36		16	9,6	○	
DC8-3E	3	45		15	15	○	
DC8-4E	4	45		16	15	○	
DC8-6E	6	45		24	15	○	
DC8-8E	8	45		26	15	○	

PINZE DC TIPO K

DDC SPANNZANGEN TYPE K _ DC COLLETS TYPE K



DC...K	d	(d)	(mm)	L	D	STOCK	PRICELIST on getooling.com
DC6-1.0K	1.0	0.9 ~ 1.0		36	9,6	○	
DC6-1.1K	1.1	1.0 ~ 1.1		36	9,6	○	
DC6-1.2K	1.2	1.1 ~ 1.2		36	9,6	○	
DC6-1.3K	1.3	1.2 ~ 1.3		36	9,6	○	
DC6-1.4K	1.4	1.3 ~ 1.4		36	9,6	○	
DC6-1.5K	1.5	1.4 ~ 1.5		36	9,6	○	
DC6-1.6K	1.6	1.5 ~ 1.6		36	9,6	○	
DC6-1.7K	1.7	1.6 ~ 1.7		36	9,6	○	
DC6-1.8K	1.8	1.7 ~ 1.8		36	9,6	○	
DC6-1.9K	1.9	1.8 ~ 1.9		36	9,6	○	



SET DC SLIM CHUCK- MANDRINO + PINZE _ SET DC SLIM CHUCK - AUFNAHME + SPANNZANGEN SET OF DC SLIM CHUCK EXTENSION ADAPTOR + COLLETS



DC4	Contenuto set - Inhalt des Sets - Set contents				STOCK	PRICELIST on getooling.com
	Mandrino Aufnahme Collet Chuck	Pinza Spannzange Collet	Chiave (A) Schlüssel (A) Spanner (A)	Chiave (B) Schlüssel (B) Spanner (B)		
SST10-DC4-90	ST10-DC4-90	DC4-2E x 1 pc	30194-002	30194-632	○	
SST12-DC4-120	ST12-DC4-120	DC4-3E x 1 pc DC4-4E x 1 pc			○	

DC6	Contenuto set - Inhalt des Sets - Set contents				STOCK	PRICELIST on getooling.com
	Mandrino Aufnahme Collet Chuck	Pinza Spannzange Collet	Chiave (A) Schlüssel (A) Spanner (A)	Chiave (B) Schlüssel (B) Spanner (B)		
SST12-DC6-120	ST12-DC6-120	DC6-3E x 1 pc	30194-002	30194-643	○	
SST16-DC6-150	ST16-DC6-150	DC6-4E x 1 pc DC6-6E x 1 pc			○	

Chiave (A) Schlüssel (A) Spanner (A)	Chiave (B) Schlüssel (B) Spanner (B)	Vite Schraube Screw	Bussola Schraube Stop Screw	Estrattore Auszieher Stop Nut
--	--	---------------------------	-----------------------------------	-------------------------------------




CODICE ORDINE Bestell-Nr. Order No.	CODICE ORDINE Bestell-Nr. Order No.	mm	L	CODICE ORDINE Bestell-Nr. Order No.	Filetto Gewinde Thread	L	CODICE ORDINE Bestell-Nr. Order No.	Filetto Gewinde Thread	CODICE ORDINE Bestell-Nr. Order No.	Filetto Gewinde Thread
30194-002	30194-632	3	100	M4L70	M4	70	OP-M8	M8(L)	TP-M8	M8(L)
	30194-643	4	150	M4L85	M4	85	OP-M10	M10(L)	TP-M12	M12(L)
	30194-644	4	200	M5L95	M5	95	OP-M12	M12(L)	Il filetto della bussola è sinistro Die Gewinde der Schraube ist links Thread of stop screw is leftward	
				M5L100	M5	100	OP-M16	M16(L)		

Il filetto della bussola è sinistro
Die Gewinde der Schraube ist links
Thread of stop screw is leftward










SLIM CHUCK	YES DRILLS	NICECUT	GE DRILLS	GROOVING	MICROTOOLS AMS	MICROTOOLS	MOULDMILL	MINIMILL	MILLING
------------	------------	---------	-----------	----------	-------------------	------------	-----------	----------	---------

INSERTS












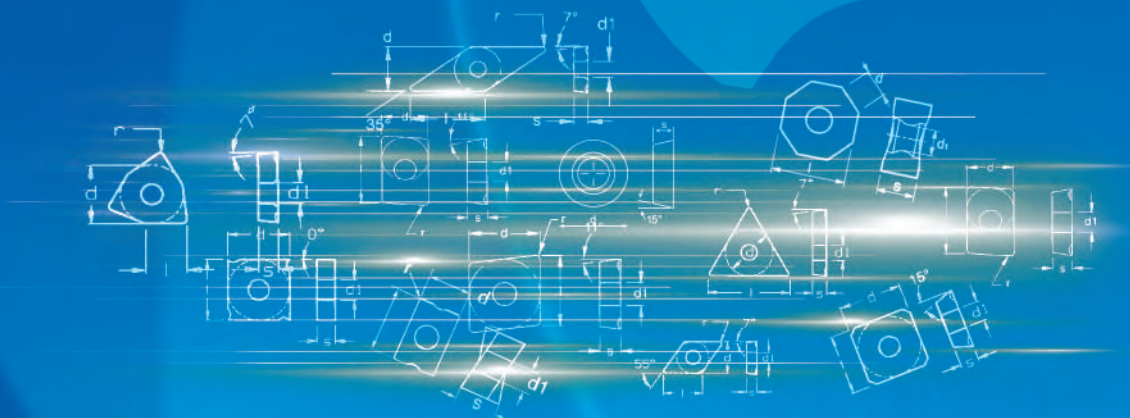


INSERTS	SLIM CHUCK	YES DRILLS	NICECUT	GE DRILLS	GROOVING	MINITOLS	MICROTOOLS AMS	MOULDMILL	MINIMILL	MILLING
---------	------------	------------	---------	-----------	----------	----------	-------------------	-----------	----------	---------










INSERTI PER FRESATURA _ WENDEPLATTEN ZUM FRÄSEN _ MILLING INSERTS

 CODICE ORDINE Bestell-Nr. Order No.	 FIGURA Form Figure	 (mm)					 DENOMINAZIONE Bezeichnung Designation	 NON RIVESTITI Unbeschichte Uncoated			 RIVESTITI Beschichtet Coated					
		l	d	s	d1	r		k15	P25	P40	P200	P300	K300	K400	TIN PVD	TIALN PVD
 APMX		6,3	3,65	2,15	2,05	1	APMX 060210 MPH						•			
 APKT... PDTR-K		6,4	3,65	2,15	2	0,4	APKT 060204 PDTR-K						•			
 APKT... PDER-S		6,4	3,7	2,17	2	0,4	APKT 060204 PDER-S				○	○	○			
		6	3,64	2,15	2,05	2,0	APKT 060220 PDER-S				○	○	○			
		10,5	6,7	3,5	2,8	0,4	APKT 1003 PDER-S				•	•	•			
		17	9,5	5,30	4,5	0,8	APKT 1604 PDER-S				•	•	•			
 APKT... PDR-M		10	6,7	3,5	3,2	0,5	APKT 1003 PDR-M						•			
		16,3	9,5	5,26	4,4	0,9	APKT 1604 PDR-M						•			
 APKT... PDFR... ALU		10,5	6,7	3,5	2,8	0,4	APKT 1003 PDFR-R04 ALU	•								
		17	9,45	5,26	4,4	0,4	APKT 1604 PDFR-R04 ALU	•								
		17	9,45	5,26	4,4	0,8	APKT 1604 PDFR-R08 ALU	•								
 APPT... MM		10,5	6,7	3,50	2,8	0,8	APPT 100308 PDSR-MM						•			
		16,5	9,5	5,26	4,5	0,8	APPT 160408 PDSR-MM						•			
 APHX... ALU		10,3	6,35	3,18	2,8	0,4	APHX 1003 FR-ALU	•								
		17	9,52	4,76	4,4	0,2	APHX 1604 FR-ALU	•								
		16	9,52	4,76	4,4	0,8	APHX 1604 PDR-ALU	•								
 APHT...		10,3	6,35	3,18	2,8	0,4	APHT 100304	•	•	•				•	•	
		16	9,52	4,76	4,4	0,8	APHT 1604 PDR	•	•	•					•	•
 RDHT... ALU		-	5	1,59	-	-	RDHT 0501MOF ALU	•								
		-	7	2,38	-	-	RDHT 0702MOF ALU	•								
		-	10	3,18	-	-	RDHT 1003MOF ALU	•								
		-	12	3,97	-	-	RDHT 12T3MOF ALU	•								
		-	16	4,76	-	-	RDHT 1604MOF ALU	•								

INSERTI PER FRESATURA _
 WENDEPLATTEN ZUM FRÄSEN _
 MILLING INSERTS














CODICE ORDINE Bestell-Nr. Order No.	FIGURA Form Figure	 (mm)					DENOMINAZIONE Bezeichnung Designation	NON RIVESTITI Unbeschichte Uncoated			RIVESTITI Beschichtet Coated					
		l	d	s	d1	r		k15	P25	P40	P200	P300	K300	K400	TIN PVD	TIALN PVD
		-	5	1,5	2,2	-	RDKW 0501MOS-MP							●		
		-	7	2,38	2,7	-	RDKW 0702MOS-MP							●		
		-	10	3,18	3,9	-	RDKW 1003MOS-MP							●		
		-	12	3,97	3,9	-	RDKW 12T3MOS-MP							●		
		-	16	4,76	5,2	-	RDKW 1604MOS-MP							●		
RDKW																
		12,7	12,7	5	4,4	0,8	SDMT 1205 PDR.69	●	●	●					●	●
SDMT... 69																
		12,7	12,7	4,76	5,5	-	SDHT 1204 AFTN							●		
SDHT																
		12,7	12,7	4,76	5,5	-	SEKT 1204 AFTN							●		
SEKT																
		12,7	12,7	4,76	5,5	-	SEHX 1204 ALU	●								
SEHX 1204 ALU																
		12,7	12,7	3,18	-	-	SEKR 1203 AFTN							●		
SEKR																
		13,4	13,4	3,97	4,1	1,5	SEHX 13T3 ALU	●								
SEHX 13T3 ALU																
		13,4	13,4	3,97	4,1	1,5	SEHT 13T3				●	●	●			
SEHT 13T3																
		11	11	2,3	4,4	-	SNHX 1102T	●	●						●	●
		11	11	2,7	4,4	-	SNHX 1103T	●	●						●	●
		12,7	12,7	3,2	5	-	SNHX 1203T	●	●						●	●
		12,7	12,7	5,4	5	-	SNHX 1205T	●	●						●	●
		11	11	2,3	4,4	-	SNHX 1102 ALU	●								
		11	11	2,7	4,4	-	SNHX 1103 ALU	●								
		12,7	12,7	3,2	5	-	SNHX 1203 ALU	●								
		12,7	12,7	5,4	5	-	SNHX 1205 ALU	●								
SNHX																
SNHX... ALU																

INSERTI PER FRESATURA _ WENDEPLATTEN ZUM FRÄSEN _ MILLING INSERTS







 CODICE ORDINE Bestell-Nr. Order No.	 FIGURA Form Figure	 (mm)					 DENOMINAZIONE Bezeichnung Designation	 NON RIVESTITI Unbeschichte Uncoated			 RIVESTITI Beschichtet Coated					
		l	d	s	d1	r		k15	P25	P40	P200	P300	K300	K400	TIN PVD	TIALN PVD
 SNEX 1206 ALU		12,7	2,5	6,4	5,2	2,36	SNEX 1206 ANN-MA ALU	●								
 SNKX 1206		12,7	2,5	6,4	5,2	2,36	SNKX 1206 ANN-MM1							●		
 SNMX 1206...MB1		12,7	2,5	6,4	5,2	2,36	SNMX 1206 ANN-MB1				●	●	●			
 SNMU		12,7	2,5	6,9	5,4	2,36	SNMU 1206 ANER				●	●	●			
 ONMU		12,7	5,2	6	6	0,8	ONMU 1205 ANN MB				●	●	●			
 LNEX...		10	6,5	6,5	3,5	0,5	LNEX 100605 PNR-MA ALU	●								
		15	10	10	4,5	0,8	LNEX 151008 PNR-MA ALU	●								
 LNKX...		10	6,5	6,5	3,5	0,5	LNKX 100605 PNR-MM							●		
		15	10	10	4,5	0,8	LNKX 151008 PNR-MM							●		
 LNMX...MB		10	6,5	6,5	3,5	0,5	LNMX 100605 PNR-MB				●	●	●			
		15	10	10	4,5	0,8	LNMX 151008 PNR-MB				●	●	●			
 SPMT		6,35	6,35	3,18	2,8	0,4	SPMT 060304							●		
		9,52	9,52	3,97	4,5	0,8	SPMT 09T308							●		
		12,7	12,7	4,76	5,5	0,8	SPMT 120408							●		

INSERTI PER FRESATURA _ WENDEPLATTEN ZUM FRÄSEN _ MILLING INSERTS																	
	CODICE ORDINE Bestell-Nr. Order No.	FIGURA Form Figure						DENOMINAZIONE Bezeichnung Designation	NON RIVESTITI Unbeschichte Uncoated			RIVESTITI Beschichtet Coated					
			l	d	s	d1	r		k15	P25	P40	P200	P300	K300	K400	TIN PVD	TIALN PVD
MOULDMILL			6,35	6,35	3,18	2,8	0,4	SPGT 060304 ALU	●								
			9,52	9,52	3,97	4,5	0,8	SPGT 09T308 ALU	●								
			12,7	12,7	4,76	5,5	0,8	SPGT 120408 ALU	●								
MICROTOOLS AMS			12,25	12,25	5,25	4,8	0,8	SEEX 12T408								●	
MINITOOLS			16,5	9,52	3,97	4,4	0,4	TCMX 16T3 ZR								●	
GROOVING			16,5	9,52	3,97	4,4	0,8	TCMX 16T308 ZR									●
GE DRILLS			16,5	9,52	3,97	4,4	0,4	TCGX 163504								●	
NICECUT			7,5	12,5	6,56	4,6	1,0	XNEX 080610-HF								●	
YES DRILLS			4	6,7	3,3	3,2	0,4	WNEU 040304-MB				●	●	●			
			4	6,7	3,3	3,2	0,8	WNEU 040308-MB				●	●	●			
SLIM CHUCK			7,5	12,5	6,56	4,6	0,8	WNEU 080608-MB				●	●	●	●		
INSERTS			8	12,7	6,55	4,6	1,2	WNEU 080612-MB				○	○	○			

INSERTI PER TORNITURA _ WENDEPLATTEN ZUM DREHEN _ TURNING INSERTS

CODICE ORDINE Bestell-Nr. Order No.	FIGURA Form Figure	 (mm)					DENOMINAZIONE Bezeichnung Designation	NON RIVESTITI Unbeschichte Uncoated			RIVESTITI Beschichtet Coated						CERMET	
		l	d	s	d1	r		k15	P25	P40	P200	P300	K300	K400	TIN PVD	TIALN PVD	X99	X55
		5,6	5,56	1,98	2,5	0,4	CPMT 05T104						●					
		5,6	5,56	1,98	2,5	0,2	CPMT 05T102 EN-PM1							●				
		5,6	5,56	1,98	2,5	0,2	CPMT 05T102 EN-PS2				○							
		5,6	5,56	1,98	2,5	0,4	CPMT 05T104 EN-PM1							●				
		5,6	5,56	1,98	2,5	0,4	CPMT 05T104 EN-PS2				○							
CPMT MINI																		
		5,6	5,56	1,98	2,5	0,2	CPGT 05T102 FN-ALU	●										
		5,6	5,56	1,98	2,5	0,4	CPGT 05T104 FN-ALU	●										
CPGT... ALU MINI																		
		6,4	6,35	2,38	2,8	0,2	CCMT 060202							●				
		6,4	6,35	2,38	2,8	0,4	CCMT 060204							●				
		9,7	9,52	3,97	4,4	0,4	CCMT 09T304							●				
		9,7	9,52	3,97	4,4	0,8	CCMT 09T308							●				
		12,9	12,7	4,76	5,5	0,4	CCMT 120404							●				
		12,9	12,7	4,76	5,5	0,8	CCMT 120408							●				
CCMT																		
		3,3	3,35	1,4	2,3	0,2	CCGT 030102 FN							●				
CCGT MINI																		
		6,4	6,35	2,38	2,8	0,2	CCGT 060202-ALU	●										
		6,4	6,35	2,38	2,8	0,4	CCGT 060204-ALU	●										
		9,7	9,52	3,97	4,4	0,2	CCGT 09T302-ALU	●										
		9,7	9,52	3,97	4,4	0,4	CCGT 09T304-ALU	●										
		9,7	9,52	3,97	4,4	0,8	CCGT 09T308-ALU	●										
		12,9	12,7	4,76	5,5	0,2	CCGT 120402 ALU	●										
		12,9	12,7	4,76	5,5	0,4	CCGT 120404 ALU	●										
		12,9	12,7	4,76	5,5	0,8	CCGT 120408 ALU	●										
CCGT... ALU																		
		4,03	3,97	1	2,1	0,1	CDGT 040101 FN-ALU	●										
		4,03	3,97	1	2,1	0,2	CDGT 040102 FN-ALU	●										
		4,03	3,97	1	2,1	0,4	CDGT 040104 FN-ALU	●										
		4,03	3,97	1	2,1	0,2	CDGT 040102 FN								●			
		4,03	3,97	1	2,1	0,4	CDGT 040104 FN								●			
CDGT MINI																		
		3,78	3,1	1,2	1,7	0,2	DCGT 04T002 FN-ALU	●										
DCGT...ALU MINI																		
		3,78	3,1	1,2	1,7	0,2	DCGT 04T002 EN-PM1							●				
DCGT...PM1 MINI																		
		7,75	6,35	2,38	2,8	0,2	DCMT 070202							●				
		7,75	6,35	2,38	2,8	0,4	DCMT 070204							●				
		11,6	9,52	3,97	4,4	0,2	DCMT 11T302							●				
		11,6	9,52	3,97	4,4	0,4	DCMT 11T304							●				
		11,6	9,52	3,97	4,4	0,8	DCMT 11T308							●				
DCMT																		
		7,75	6,35	2,38	2,8	0,2	DCGT 070202-ALU	●										
		7,75	6,35	2,38	2,8	0,4	DCGT 070204 -ALU	●										
		11,6	9,52	3,97	4,4	0,2	DCGT 11T302-ALU	●										
		11,6	9,52	3,97	4,4	0,4	DCGT 11T304-ALU	●										
		11,6	9,52	3,97	4,4	0,8	DCGT 11T308-ALU	●										
DCGT... ALU																		

INSERTI PER FORATURA WENDEPLATTEN ZUM BOHREN _DRILLING INSERTS

 CODICE ORDINE Bestell-Nr. Order No.	 FIGURA Form Figure	 (mm)					 DENOMINAZIONE Bezeichnung Designation	 NON RIVESTITI Unbeschichte Uncoated			 RIVESTITI Beschichtet Coated					
		l	d	s	d1	r		k15	P25	P40	P200	P300	K300	K400	TIN PVD	TIALN PVD
 	WCHX... LW610	4,0	6,35	1,59	2,25	0,2	WCHX 040102FN-BAL LW610	●								
		4,0	6,35	1,59	2,25	0,4	WCHX 040104FN-BAL LW610	●								
		5,0	7,93	1,98	2,80	0,2	WCHX 05T102FN-BAL LW610	●								
		5,0	7,93	1,98	2,80	0,4	WCHX 05T104FN-BAL LW610	●								
		5,5	8,93	2,38	2,80	0,2	WCHX 060202FN-BAL LW610	●								
		5,5	8,93	2,38	2,80	0,4	WCHX 060204FN-BAL LW610	●								
		7,5	12,00	3,18	3,40	0,4	WCHX 070304FN-BAL LW610	●								
		7,5	12,00	3,18	3,40	0,8	WCHX 070308FN-BAL LW610	●								
		9,0	14,29	3,18	4,40	0,4	WCHX 090304FN-BAL LW610	●								
		9,0	14,29	3,18	4,40	0,8	WCHX 090308FN-BAL LW610	●								
		10,0	15,87	3,97	5,90	0,4	WCHX 10T304FN-BAL LW610	●								
		10,0	15,87	3,97	5,90	0,8	WCHX 10T308FN-BAL LW610	●								
		13,0	21,00	5,56	7,00	0,8	WCHX 130508FN-BAL LW610	●								
 	WCHX... LCP25T	4,0	6,35	1,59	2,25	0,2	WCHX 040102EN-BFM LCP25T							●		
		4,0	6,35	1,59	2,25	0,4	WCHX 040104EN-BFM LCP25T							●		
		5,0	7,93	1,98	2,80	0,2	WCHX 05T102EN-BFM LCP25T							●		
		5,0	7,93	1,98	2,80	0,4	WCHX 05T104EN-BFM LCP25T							●		
		5,5	8,37	2,38	2,80	0,2	WCHX 060202EN-BFM LCP25T							●		
		5,5	8,37	2,38	2,80	0,4	WCHX 060204EN-BFM LCP25T							●		
		7,5	12,00	3,18	3,40	0,4	WCHX 070304EN-BFM LCP25T							●		
		7,5	12,00	3,18	3,40	0,8	WCHX 070308EN-BFM LCP25T							●		
		9,0	14,29	3,18	4,40	0,4	WCHX 090304EN-BFM LCP25T							●		
		9,0	14,29	3,18	4,40	0,8	WCHX 090308EN-BFM LCP25T							●		
		10,0	15,87	3,97	5,90	0,4	WCHX 10T304EN-BFM LCP25T							●		
		10,0	15,87	3,97	5,90	0,8	WCHX 10T308EN-BFM LCP25T							●		
		13,0	21,00	5,56	7,00	0,8	WCHX 130508EN-BFM LCP25T							●		
 	WCHX... LCM45T	4,0	6,35	1,59	2,25	0,2	WCHX 040102EN-BFM LCM45T					●				
		4,0	6,35	1,59	2,25	0,4	WCHX 040104EN-BFM LCM45T					●				
		5,0	7,93	1,98	2,80	0,2	WCHX 05T102EN-BFM LCM45T					●				
		5,0	7,93	1,98	2,80	0,4	WCHX 05T104EN-BFM LCM45T					●				
		5,5	8,93	2,38	2,80	0,2	WCHX 060202EN-BFM LCM45T					●				
		5,5	8,93	2,38	2,80	0,4	WCHX 060204EN-BFM LCM45T					●				
		7,5	12,00	3,18	3,40	0,4	WCHX 070304EN-BFM LCM45T					●				
		7,5	12,00	3,18	3,40	0,8	WCHX 070308EN-BFM LCM45T					●				
		9,0	14,29	3,18	4,40	0,4	WCHX 090304EN-BFM LCM45T					●				
		9,0	14,29	3,18	4,40	0,8	WCHX 090308EN-BFM LCM45T					●				
		10,0	15,87	3,97	5,90	0,4	WCHX 10T304EN-BFM LCM45T					●				
		10,0	15,87	3,97	5,90	0,8	WCHX 10T308EN-BFM LCM45T					●				
		13,0	21,00	5,56	7,00	0,8	WCHX 130508EN-BFM LCM45T					●				
 	XPMT...	4,6	4,2	2,1	2,6	0,4	XPMT 042004					●	○			
		5,5	5,0	2,9	2,9	0,4	XPMT 052804					●	○			
		6,6	6,0	3,5	3,4	0,6	XPMT 063306					●	○			
		8,3	7,5	4,2	3,9	0,6	XPMT 074006					●	○			
		10,6	9,6	4,7	5,7	0,8	XPMT 094508					●	○			
		13,6	12,4	6,0	7,5	1,2	XPMT 125812					●	○			
		16,7	15,2	7,0	9,5	1,2	XPMT 156812					●	○			
 	XPMT... ALU	4,6	4,2	2,1	2,6	0,4	XPMT 042004 ALU	○								
		5,5	5,0	2,9	2,9	0,4	XPMT 052804 ALU	○								
		6,6	6,0	3,5	3,4	0,6	XPMT 063306 ALU	○								
		8,3	7,5	4,2	3,9	0,6	XPMT 074006 ALU	○								
		10,6	9,6	4,7	5,7	0,8	XPMT 094508 ALU	○								
		13,6	12,4	6,0	7,5	1,2	XPMT 125812 ALU	○								
		16,7	15,2	7,0	9,5	1,2	XPMT 156812 ALU	○								

● Disponibile - Lieferbar - On stock












○ A richiesta - Auf Anfrage - On request

2024

INSERTI CBN/PKD _ CBN/PKD WENDEPLATTEN_ CBN/PKD INSERTS

CODICE ORDINE Bestell-Nr. Order No.	(mm)					DENOMINAZIONE Bezeichnung Designation	NON RIVESTITI Unbeschichte Uncoated			RIVESTITI Beschichtet Coated						CERMET	
	l	d	s	d1	r		k15	P25	P40	P200	P300	K300	K400	TIN PVD	TIALN PVD	CBN	PKD
CDGW MINI	--	--	--	--	--	CDGW 040101 FN CVD 2P											○
	--	--	--	--	--	CDGW 040101 H65-2C										○	
DCGW MINI	--	--	--	--	--	DCGW 04T001 FN CVD 2P											○
	--	--	--	--	--	DCGW 04T001 H65-2C										○	
VCGW MINI	--	--	--	--	--	VCGW 050101 FN CVD 2P											○
	--	--	--	--	--	VCGW 050101 H65-2C										○	
WCGW MINI	--	--	--	--	--	WCGW 020101 FN CVD 3P											○
	--	--	--	--	--	WCGW 020101 H65-3C										○	

INSERTI NICECUT _ NICECUT WENDEPLATTEN _ NICECUT INSERTS

CODICE ORDINE Bestell-Nr. Order No.	FIGURA Form Figure	 (mm)					DENOMINAZIONE Bezeichnung Designation	NON RIVESTITI Unbeschichte Uncoated			RIVESTITI Beschichtet Coated						CERMET	
		l	d	s	d1	r		k15	P25	P40	P200	P300	K300	K400	TIN PVD	TIALN PVD	X99	X55
 C22... GUX		6,0	6,35	2,38	2,8	0,2	C22 GUX NK2020	○										
		6,0	6,35	2,38	2,8	0,2	C22 GUX NK5050								○			
 C32... GUX		9,0	9,525	3,18	3,8	0,6	C32 GUX NK2020	○										
		9,0	9,525	3,18	3,8	0,6	C32 GUX NK5050								○			
 DCET 11X304		10,6	9,525	3,0	4,4	0,4	DCET 11X304								○			
 T32GSR		16,5	9,525	3,18	3,8	0,4	T32GSR-1R NK2020	○								○		
		16,5	9,525	3,18	3,8	0,4	T32GSR-2R NK2020	○								○		
		16,5	9,525	3,18	3,8	0,4	T32GSR-3R NK2020	○								○		
 N43GXR8		12,7	12,7	4,76	5,2	0,8	N43GXR8-1R NK2020	●								○		
		12,7	12,7	4,76	5,2	0,8	N43GXR8-2R NK2020	●								○		
		12,7	12,7	4,76	5,2	0,8	N43GXR8-3R NK2020	●								○		
		12,7	12,7	4,76	5,2	0,8	N43GXR8-4R NK2020	●								○		
		12,7	12,7	4,76	5,2	0,8	N43GXR8-5R NK2020	●								○		
		12,7	12,7	4,76	5,2	0,8	N43GXR8-1-2-3-4 NK2020	●								○		
 N54GCR		15/20	15/20	4,76	5,2	0,8	N54GCR-5R NK2020	○								○		
		15/20	15/20	4,5	5,2	0,8	N54GCR-6R NK2020	○								○		
		15/20	15/20	4,5	5,2	0,8	N54GCR-7R NK2020	○								○		
		15/20	15/20	4,76	5,2	0,8	N54GCR-8R NK2020	○								○		
		15/20	15/20	4,5	5,2	0,8	N54GCR-9R NK2020	○								○		
		15/20	15/20	4,76	5,2	0,8	N54GCR-10R NK2020	○								○		
 TM32 GUR		15,1	9,525	3,18	3,8	0,4	TM32 GUR HSS	○										
 TM32 GSR		13,2	9,525	3,18	3,8	0,4	TM32 GSR HSS	○								○		
 TXMT		6,543	4,762	2,381	2,3	0,6	TXMT 080206	○								○		
		8,925	6,35	3,175	2,8	0,6	TXMT 110306	○								○		
		14,4	9,525	3,969	4,4	0,6	TXMT 16T306	○								○		
		25,0	15,875	5,556	5,5	0,6	TXMT 270506	○								○		

INSERTS	SLIM CHUCK	YES DRILLS	NICECUT	GE DRILLS	GROOVING	MINITOLS	MICROTOOLS AMS	MOULDMILL	MINIMILL	MILLING
---------	------------	------------	---------	-----------	----------	----------	-------------------	-----------	----------	---------

SPEED TIGER



SPEED TIGER	INSERTS	SLIM CHUCK	YES DRILLS	NICECUT	GE DRILLS	GROOVING	MINITOLS	MICROTOOLS AMS	MOULDMILL	MINIMILL	MILLING
-------------	---------	------------	------------	---------	-----------	----------	----------	-------------------	-----------	----------	---------

SQUARE SERIES-LONG NECK-2 FLUTES

- Micro Grain Carbide
- WC=90 Co=10 HV30=1571 Rupture=3750N/mm² Grain Size=0.6 μm




LNT	Diameter	Flute Length	Efficient Length	Full Length	Shank Diameter	Flutes	KG	STOCK	PRICELIST on getooling.com
	d	l	L1	L	D	Z			
LNT05022 ALTiN	0.5	0.75	2	50	4	2	0,010	●	
LNT05042 ALTiN	0.5	0.75	4	50	4	2	0,010	●	
LNT05062 ALTiN	0.5	0.75	6	50	4	2	0,010	●	
LNT06022 ALTiN	0.6	0.9	2	50	4	2	0,010	●	
LNT06042 ALTiN	0.6	0.9	4	50	4	2	0,010	●	
LNT06062 ALTiN	0.6	0.9	6	50	4	2	0,010	●	
LNT07042 ALTiN	0.7	1.1	4	50	4	2	0,010	●	
LNT07062 ALTiN	0.7	1.1	6	50	4	2	0,010	●	
LNT08042 ALTiN	0.8	1.2	4	50	4	2	0,010	●	
LNT08062 ALTiN	0.8	1.2	6	50	4	2	0,010	●	
LNT08082 ALTiN	0.8	1.2	8	50	4	2	0,010	●	
LNT09062 ALTiN	0.9	1.4	6	50	4	2	0,010	●	
LNT09082 ALTiN	0.9	1.4	8	50	4	2	0,010	●	
LNT09102 ALTiN	0.9	1.4	10	50	4	2	0,010	●	
LNT10062 ALTiN	1	1.5	6	50	4	2	0,010	●	
LNT10082 ALTiN	1	1.5	8	50	4	2	0,010	●	
LNT10102 ALTiN	1	1.5	10	50	4	2	0,010	●	
LNT10122 ALTiN	1	1.5	12	50	4	2	0,010	●	
LNT10162 ALTiN	1	1.5	16	50	4	2	0,010	●	
LNT12062 ALTiN	1.2	1.8	6	50	4	2	0,010	●	
LNT12082 ALTiN	1.2	1.8	8	50	4	2	0,010	●	
LNT12102 ALTiN	1.2	1.8	10	50	4	2	0,010	●	
LNT12122 ALTiN	1.2	1.8	12	50	4	2	0,010	●	
LNT14062 ALTiN	1.4	2.1	6	50	4	2	0,010	●	
LNT14102 ALTiN	1.4	2.1	10	50	4	2	0,010	●	
LNT14162 ALTiN	1.4	2.1	16	50	4	2	0,010	●	
LNT15062 ALTiN	1.5	2.3	6	50	4	2	0,010	●	
LNT15082 ALTiN	1.5	2.3	8	50	4	2	0,010	●	
LNT15102 ALTiN	1.5	2.3	10	50	4	2	0,010	●	
LNT15122 ALTiN	1.5	2.3	12	50	4	2	0,010	●	
LNT15142 ALTiN	1.5	2.3	14	50	4	2	0,010	●	
LNT15162 ALTiN	1.5	2.3	16	50	4	2	0,010	●	
LNT15182 ALTiN	1.5	2.3	18	50	4	2	0,010	●	
LNT15202 ALTiN	1.5	2.3	20	50	4	2	0,010	●	
LNT16062 ALTiN	1.6	2.4	6	50	4	2	0,010	●	
LNT16082 ALTiN	1.6	2.4	8	50	4	2	0,010	●	
LNT16102 ALTiN	1.6	2.4	10	50	4	2	0,010	●	
LNT16122 ALTiN	1.6	2.4	12	50	4	2	0,010	●	

Application: ☒ Recommend ☐ Suitable ☒ Not Recommend

Carbon steel, Alloy steel	Pre-harden steel ~45HRC	~50HRC	High-hardened ~55HRC	~60HRC	~65HRC	Stainless steel	Copper alloy	Aluminun alloy
☐	☒	☒	☐	-	-	☐	-	-

SQUARE SERIES-LONG NECK-2 FLUTES

• Micro Grain Carbide
• WC=90 Co=10 HV30=1571 Rupture=3750N/mm² Grain Size=0.6 µm

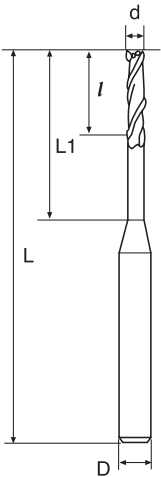


LNT	Diameter	Flute Length	Efficient Length	Full Length	Shank Diameter	Flutes	KG	STOCK	PRICELIST on getooling.com
	d	l	L1	L	D	Z			
LNT16142 AlTiN	1.6	2.4	14	50	4	2	0,010	●	
LNT16162 AlTiN	1.6	2.4	16	50	4	2	0,010	●	
LNT16182 AlTiN	1.6	2.4	18	50	4	2	0,010	●	
LNT18082 AlTiN	1.8	2.7	8	50	4	2	0,010	●	
LNT18142 AlTiN	1.8	2.7	14	50	4	2	0,010	●	
LNT18202 AlTiN	1.8	2.7	20	50	4	2	0,010	●	
LNT20062 AlTiN	2	3	6	50	4	2	0,010	●	
LNT20082 AlTiN	2	3	8	50	4	2	0,010	●	
LNT20102 AlTiN	2	3	10	50	4	2	0,010	●	
LNT20122 AlTiN	2	3	12	50	4	2	0,010	●	
LNT20142 AlTiN	2	3	14	50	4	2	0,010	●	
LNT20162 AlTiN	2	3	16	50	4	2	0,010	●	
LNT20182 AlTiN	2	3	18	50	4	2	0,010	●	
LNT20202 AlTiN	2	3	20	50	4	2	0,010	●	
LNT25082 AlTiN	2.5	4	8	50	4	2	0,010	●	
LNT25102 AlTiN	2.5	4	10	50	4	2	0,010	●	
LNT25122 AlTiN	2.5	4	12	50	4	2	0,010	●	
LNT25142 AlTiN	2.5	4	14	50	4	2	0,010	●	
LNT25162 AlTiN	2.5	4	16	50	4	2	0,010	●	
LNT25202 AlTiN	2.5	4	20	50	4	2	0,010	●	
LNT30082 AlTiN	3	4.5	8	50	6	2	0,020	●	
LNT30102 AlTiN	3	4.5	10	50	6	2	0,020	●	
LNT30122 AlTiN	3	4.5	12	50	6	2	0,020	●	
LNT30162 AlTiN	3	4.5	16	60	6	2	0,020	●	
LNT30202 AlTiN	3	4.5	20	60	6	2	0,020	●	
LNT30252 AlTiN	3	4.5	25	75	6	2	0,020	●	
LNT35122 AlTiN	3.5	6	12	50	6	2	0,020	●	
LNT35162 AlTiN	3.5	6	16	60	6	2	0,020	●	
LNT35202 AlTiN	3.5	6	20	75	6	2	0,020	●	
LNT35252 AlTiN	3.5	6	25	75	6	2	0,020	●	
LNT35302 AlTiN	3.5	6	30	75	6	2	0,020	●	
LNT40122 AlTiN	4	6	12	50	6	2	0,020	●	
LNT40162 AlTiN	4	6	16	60	6	2	0,020	●	
LNT40202 AlTiN	4	6	20	75	6	2	0,020	●	
LNT40252 AlTiN	4	6	25	75	6	2	0,020	●	
LNT40302 AlTiN	4	6	30	75	6	2	0,020	●	
LNT40352 AlTiN	4	6	35	75	6	2	0,020	●	

Application: ☒ Recommend ☐ Suitable ☒ Not Recommend

Carbon steel, Alloy steel	Pre-hardened steel		High-hardened			Stainless steel	Copper alloy	Aluminum alloy
	~45HRC	~50HRC	~55HRC	~60HRC	~65HRC			
☐	☒	☒	☐	-	-	☐	-	-

SQUARE SERIES- 2 FLUTES

- Micro Grain Carbide
- WC=90 Co=10 HV30=1571 Rupture=3750N/mm² Grain Size=0.6 m

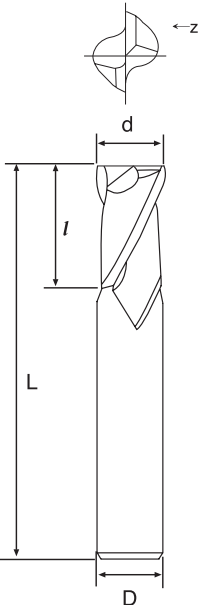


SSE MSE SE	Diameter	Flute Length	Full Length	Shank Diameter	Flutes	KG	STOCK	PRICELIST on getooling.com
	d	l	L	D	Z			
SSE0102 TiSiN	1	3	50	3	2	0,020	○	
MSE0102 TiSiN	1	3	50	4	2	0,020	●	
SSE0152 TiSiN	1.5	4	50	3	2	0,020	○	
MSE0152 TiSiN	1.5	4	50	4	2	0,020	●	
SSE0202 TiSiN	2	6	50	3	2	0,020	○	
MSE0202 TiSiN	2	6	50	4	2	0,020	●	
SSE0252 TiSiN	2.5	8	50	3	2	0,020	○	
MSE0252 TiSiN	2.5	8	50	4	2	0,020	●	
SSE0302 TiSiN	3	8	50	3	2	0,020	○	
MSE0302 TiSiN	3	8	50	4	2	0,020	●	
MSE0352 TiSiN	3.5	10	50	4	2	0,020	●	
MSE0402 TiSiN	4	11	50	4	2	0,020	●	
SE0102 TiSiN	1	3	50	6	2	0,020	●	
SE0152 TiSiN	1.5	4	50	6	2	0,020	●	
SE0202 TiSiN	2	6	50	6	2	0,020	●	
SE0252 TiSiN	2.5	8	50	6	2	0,020	●	
SE0302 TiSiN	3	8	50	6	2	0,020	●	
SE0352 TiSiN	3.5	10	50	6	2	0,020	●	
SE0402 TiSiN	4	11	50	6	2	0,020	●	
SE0452 TiSiN	4.5	13	50	6	2	0,020	●	
SE0502 TiSiN	5	13	50	6	2	0,020	●	
SE0552 TiSiN	5.5	13	50	6	2	0,020	●	
SE0602 TiSiN	6	16	50	6	2	0,020	●	
SE0652 TiSiN	6.5	16	60	8	2	0,040	●	
SE0702 TiSiN	7	16	60	8	2	0,040	●	
SE0752 TiSiN	7.5	19	60	8	2	0,040	●	
SE0802 TiSiN	8	20	60	8	2	0,040	●	
SE0852 TiSiN	8.5	20	75	10	2	0,080	●	
SE0902 TiSiN	9	20	75	10	2	0,080	●	
SE0952 TiSiN	9.5	25	75	10	2	0,080	●	
SE1002 TiSiN	10	25	75	10	2	0,080	●	
SE1052 TiSiN	10.5	25	75	12	2	0,100	●	
SE1102 TiSiN	11	30	75	12	2	0,110	●	
SE1152 TiSiN	11.5	30	75	12	2	0,110	●	
SE1202 TiSiN	12	32	75	12	2	0,110	●	
SE1402 TiSiN	14	40	100	16	2	0,240	●	
SE1602 TiSiN	16	40	100	16	2	0,290	●	
SE1802 TiSiN	18	45	100	20	2	0,360	●	
SE2002 TiSiN	20	45	100	20	2	0,390	●	

Application: ☒ Recommend ☐ Suitable x Not Recommend

Carbon steel, Alloy steel	Pre-harden steel	High-hardened			Stainless steel	Copper alloy	Aluminun alloy
	~45HRC	~50HRC	~55HRC	~60HRC	~65HRC		
☐	☒	☒	☐	-	-	☐	-

SQUARE SERIES-4 FLUTES

- Micro Grain Carbide
- WC=90 Co=10 HV30=1571 Rupture=3750N/mm² Grain Size=0.6

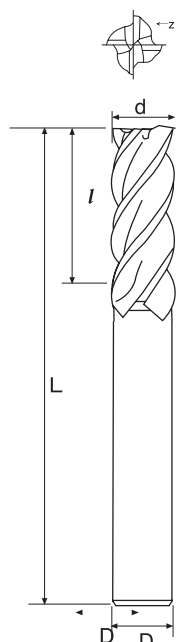

SSE
MSE
SE



	Diameter	Flute Length	Full Length	Shank Diameter	Flutes	KG	STOCK	PRICELIST on getooling.com
	d	l	L	D	Z			
SSE0104 TiSiN	1	3	50	3	4	0,020	○	
MSE0104 TiSiN	1	3	50	4	4	0,020	●	
SSE0154 TiSiN	1.5	4	50	3	4	0,020	○	
MSE0154 TiSiN	1.5	4	50	4	4	0,020	●	
SSE0204 TiSiN	2	6	50	3	4	0,020	○	
MSE0204 TiSiN	2	6	50	4	4	0,020	●	
SSE0254 TiSiN	2.5	8	50	3	4	0,020	○	
MSE0254 TiSiN	2.5	8	50	4	4	0,020	●	
SSE0304 TiSiN	3	8	50	3	4	0,020	○	
MSE0304 TiSiN	3	8	50	4	4	0,020	●	
MSE0354 TiSiN	3.5	10	50	4	4	0,020	●	
MSE0404 TiSiN	4	11	50	4	4	0,020	●	
SE0104 TiSiN	1	3	50	6	4	0,020	●	
SE0154 TiSiN	1.5	4	50	6	4	0,020	●	
SE0204 TiSiN	2	6	50	6	4	0,020	●	
SE0254 TiSiN	2.5	8	50	6	4	0,020	●	
SE0304 TiSiN	3	8	50	6	4	0,020	●	
SE0354 TiSiN	3.5	10	50	6	4	0,020	●	
SE0404 TiSiN	4	11	50	6	4	0,020	●	
SE0454 TiSiN	4.5	13	50	6	4	0,020	●	
SE0504 TiSiN	5	13	50	6	4	0,020	●	
SE0554 TiSiN	5.5	13	50	6	4	0,020	●	
SE0604 TiSiN	6	16	50	6	4	0,040	●	
SE0654 TiSiN	6.5	16	60	8	4	0,040	●	
SE0704 TiSiN	7	16	60	8	4	0,040	●	
SE0754 TiSiN	7.5	19	60	8	4	0,040	●	
SE0804 TiSiN	8	20	60	8	4	0,040	●	
SE0854 TiSiN	8.5	20	75	10	4	0,080	●	
SE0904 TiSiN	9	20	75	10	4	0,080	●	
SE0954 TiSiN	9.5	25	75	10	4	0,080	●	
SE1004 TiSiN	10	30	75	10	4	0,080	●	
SE1054 TiSiN	10.5	30	75	12	4	0,100	●	
SE1104 TiSiN	11	30	75	12	4	0,110	●	
SE1154 TiSiN	11.5	30	75	12	4	0,110	●	
SE1204 TiSiN	12	32	75	12	4	0,110	●	
SE1404 TiSiN	14	40	100	16	4	0,240	●	
SE1604 TiSiN	16	40	100	16	4	0,290	●	
SE1804 TiSiN	18	45	100	20	4	0,360	●	
SE2004 TiSiN	20	45	100	20	4	0,390	●	

Application: ☒ Recommend ☐ Suitable ☒ Not Recommend

Carbon steel, Alloy steel	Pre-harden steel ~45HRC	~50HRC	High-hardened ~55HRC	~60HRC	~65HRC	Stainless steel	Copper alloy	Aluminum alloy
☐	☒	☒	☐	-	-	☐	-	-

SQUARE SERIES-LONG FLUTE-4 FLUTES

- Micro Grain Carbide
- WC=90 Co=10 HV30=1571 Rupture=3750N/mm² Grain Size=0.6 m

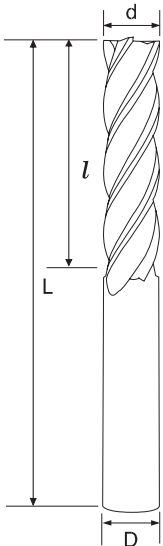


LET	Diameter	Flute Length	Full Length	Shank Diameter	Flutes	KG	STOCK	PRICELIST on getooling.com
LET0104 TiSiN	1	6	50	4	4	0,020	●	
LET0154 TiSiN	1.5	9	50	4	4	0,020	●	
LET0204 TiSiN	2	12	50	4	4	0,020	●	
LET0254 TiSiN	2.5	12	50	4	4	0,020	●	
LET0304 TiSiN	3	15	60	6	4	0,020	●	
LET0354 TiSiN	3,5	15	60	6	4	0,020	●	
LET0404 TiSiN	4	20	75	6	4	0,020	●	
LET0454 TiSiN	4.5	20	75	6	4	0,030	●	
LET0504 TiSiN	5	25	75	6	4	0,030	●	
LET0554 TiSiN	5.5	25	75	6	4	0,030	●	
LET0604 TiSiN	6	30	75	6	4	0,030	●	
LET0704 TiSiN	7	30	100	8	4	0,060	●	
LET0804 TiSiN	8	40	100	8	4	0,070	●	
LET0904 TiSiN	9	40	100	10	4	0,090	●	
LET1004 TiSiN	10	40	100	10	4	0,110	●	
LET1104 TiSiN	11	40	100	12	4	0,140	●	
LET1204 TiSiN	12	50	100	12	4	0,140	●	
LET1404 TiSiN	14	50	150	16	4	0,350	●	
LET1604 TiSiN	16	60	150	16	4	0,370	●	
LET2004 TiSiN	20	90	200	20	4	0,720	●	

Application: ■ Recommend □ Suitable x Not Recommend

Carbon steel, Alloy steel	Pre-harden steel ~45HRC	~50HRC	High-hardened ~55HRC	~60HRC	~65HRC	Stainless steel	Copper alloy	Aluminun alloy
□	■	■	□	-	-	□	-	-

SQUARE SERIES-FLUTE ANGLE 45°-3 FLUTES

- Micro Grain Carbide
- WC=88 Co=12 HRA=92.4 Rupture=3950N/mm² Grain Size=0.5 m

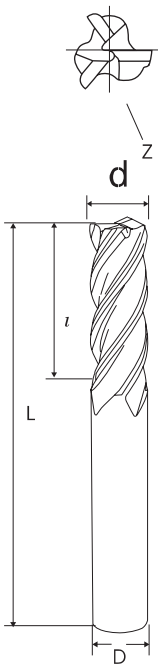


MPE PE	Diameter	Flute Length	Full Length	Shank Diameter	Flutes	KG	STOCK	PRICELIST on getooling.com
	d	l	L	D	Z			
MPE0103 TiSiN	1	3	50	4	3	0,010	●	
MPE0153 TiSiN	1.5	4	50	4	3	0,020	●	
MPE0203 TiSiN	2	6	50	4	3	0,020	●	
MPE0253 TiSiN	2.5	8	50	4	3	0,020	●	
MPE3303 TiSiN	3	8	50	3	3	0,020	●	
MPE0303 TiSiN	3	8	50	4	3	0,020	●	
MPE0353 TiSiN	3.5	10	50	4	3	0,020	●	
MPE0403 TiSiN	4	11	50	4	3	0,020	●	
PE0103 TiSiN	1	3	50	6	3	0,020	●	
PE0153 TiSiN	1.5	4	50	6	3	0,020	●	
PE0203 TiSiN	2	6	50	6	3	0,020	●	
PE0253 TiSiN	2.5	8	50	6	3	0,020	●	
PE0303 TiSiN	3	8	50	6	3	0,020	●	
PE0353 TiSiN	3.5	10	50	6	3	0,020	●	
PE0403 TiSiN	4	11	50	6	3	0,020	●	
PE0453 TiSiN	4.5	13	50	6	3	0,020	●	
PE0503 TiSiN	5	13	50	6	3	0,020	●	
PE0553 TiSiN	5.5	13	50	6	3	0,020	●	
PE0603 TiSiN	6	16	50	6	3	0,020	●	
PE0653 TiSiN	6.5	16	60	8	3	0,040	●	
PE0703 TiSiN	7	16	60	8	3	0,040	●	
PE0753 TiSiN	7.5	19	60	8	3	0,040	●	
PE0803 TiSiN	8	20	60	8	3	0,040	●	
PE0853 TiSiN	8.5	20	75	10	3	0,080	●	
PE0903 TiSiN	9	20	75	10	3	0,080	●	
PE0953 TiSiN	9.5	25	75	10	3	0,080	●	
PE1003 TiSiN	10	30	75	10	3	0,080	●	
PE1053 TiSiN	10.5	30	75	12	3	0,100	●	
PE1103 TiSiN	11	30	75	12	3	0,110	●	
PE1153 TiSiN	11.5	30	75	12	3	0,110	●	
PE1203 TiSiN	12	32	75	12	3	0,110	●	
PE1403 TiSiN	14	40	100	16	3	0,240	●	
PE1603 TiSiN	16	40	100	16	3	0,290	●	
PE1803 TiSiN	18	45	100	20	3	0,360	●	
PE2003 TiSiN	20	45	100	20	3	0,390	●	

Application: ☒ Recommend ☐ Suitable ☒ Not Recommend

Carbon steel, Alloy steel	Pre-harden steel	High-hardened					Stainless steel	Copper alloy	Aluminun alloy
	~45HRC	~50HRC	~55HRC	~60HRC	~65HRC				
☐	☒	☒	☐	-	-	☐	-	-	-

SQUARE SERIES-FLUTE ANGLE 45°-4 FLUTES

- Micro Grain Carbide
- WC=90 Co=10 HV30=1571 Rupture=3750N/mm² Grain Size=0.6 m

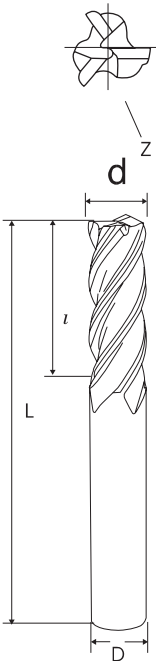


MPE PE	Diameter	Flute Length	Full Length	Shank Diameter	Flutes	KG	STOCK	PRICELIST on getooling.com
	d	l	L	D	Z			
MPE0104 TiSiN	1	3	50	4	4	0,010	●	
MPE0154 TiSiN	1.5	4	50	4	4	0,020	●	
MPE0204 TiSiN	2	6	50	4	4	0,020	●	
MPE0254 TiSiN	2.5	8	50	4	4	0,020	●	
MPE3304 TiSiN	3	8	50	3	4	0,020	●	
MPE0304 TiSiN	3	8	50	4	4	0,020	●	
MPE0354 TiSiN	3.5	10	50	4	4	0,020	●	
MPE0404 TiSiN	4	11	50	4	4	0,020	●	
PE0104 TiSiN	1	3	50	6	4	0,020	●	
PE0154 TiSiN	1.5	4	50	6	4	0,020	●	
PE0204 TiSiN	2	6	50	6	4	0,020	●	
PE0254 TiSiN	2.5	8	50	6	4	0,020	●	
PE0304 TiSiN	3	8	50	6	4	0,020	●	
PE0354 TiSiN	3.5	10	50	6	4	0,020	●	
PE0404 TiSiN	4	11	50	6	4	0,020	●	
PE0454 TiSiN	4.5	13	50	6	4	0,020	●	
PE0504 TiSiN	5	13	50	6	4	0,020	●	
PE0554 TiSiN	5.5	13	50	6	4	0,020	●	
PE0604 TiSiN	6	16	50	6	4	0,020	●	
PE0654 TiSiN	6.5	16	60	8	4	0,040	●	
PE0704 TiSiN	7	16	60	8	4	0,040	●	
PE0754 TiSiN	7.5	19	60	8	4	0,040	●	
PE0804 TiSiN	8	20	60	8	4	0,040	●	
PE0854 TiSiN	8.5	20	75	10	4	0,080	●	
PE0904 TiSiN	9	20	75	10	4	0,080	●	
PE0954 TiSiN	9.5	25	75	10	4	0,080	●	
PE1004 TiSiN	10	30	75	10	4	0,080	●	
PE1054 TiSiN	10.5	30	75	12	4	0,100	●	
PE1104 TiSiN	11	30	75	12	4	0,110	●	
PE1154 TiSiN	11.5	30	75	12	4	0,110	●	
PE1204 TiSiN	12	32	75	12	4	0,110	●	
PE1404 TiSiN	14	40	100	16	4	0,240	●	
PE1604 TiSiN	16	40	100	16	4	0,290	●	
PE1804 TiSiN	18	45	100	20	4	0,360	●	
PE2004 TiSiN	20	45	100	20	4	0,390	●	

Application: ☒ Recommend ☐ Suitable ☒ Not Recommend

Carbon steel, Alloy steel	Pre-hardened steel	High-hardened					Stainless steel	Copper alloy	Aluminun alloy
	~45HRC	~50HRC	~55HRC	~60HRC	~65HRC				
☐	☒	☒	☒	☐	-	-	☐	-	-

SQUARE SERIES - FLUTE ANGLE 35° / 38° - 4 FLUTES

• Micro Grain Carbide
• WC=90 Co=10 HV30=1571 Rupture=3750N/mm² Grain Size=0.6 m

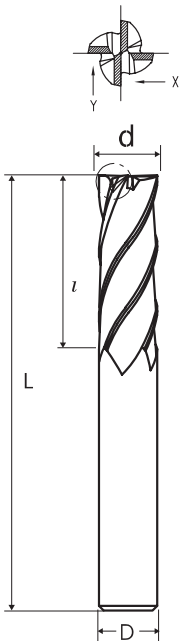

DH	Diameter	Flute Length	Full Length	Shank Diameter	Flutes	KG	STOCK	PRICELIST on getooling.com
	d	l	L	D	Z			
DH0104 TiSiN	1	3	50	6	4	0,020	○	
DH0154 TiSiN	1,5	4	50	6	4	0,020	○	
DH0204 TiSiN	2	6	50	6	4	0,020	○	
DH0304 TiSiN	3	8	50	6	4	0,020	○	
DH0404 TiSiN	4	11	50	6	4	0,020	○	
DH0604 TiSiN	6	16	50	6	4	0,020	○	
DH0804 TiSiN	8	20	60	8	4	0,040	○	
DH1004 TiSiN	10	30	75	10	4	0,080	○	
DH1204 TiSiN	12	32	75	12	4	0,110	○	
DH1604 TiSiN	16	40	100	16	4	0,290	○	
DH2004 TiSiN	20	45	100	20	4	0,390	○	

Application: ☒ Recommend ☐ Suitable ☒ Not Recommend


Carbon steel, Alloy steel	Pre-harden steel		High-hardened			Stainless steel	Copper alloy	Aluminun alloy
	~45HRC	~50HRC	~55HRC	~60HRC	~65HRC			
☐	☒	☒	☐	-	-	☐	-	-

SQUARE SERIES - FOR HARD MATERIAL - MULTIPLE FLUTE

- Ultra Fine Micro Grain Carbide
- WC=87 Co=12 HRA=92.1 Rupture=3800N/mm’ Grain Size=0.4 m



UVT ULVT	Diameter	Flute Length	Full Length	Shank Diameter	Flutes	KG	STOCK	PRICELIST on getooling.com
	d	l	L	D	Z			
UVT0204 ALTiN	2	4	50	4	4	0,010	○	
UVT0304 ALTiN	3	6	50	6	4	0,020	○	
UVT0404 ALTiN	4	8	50	6	4	0,020	○	
UVT0506 ALTiN	5	13	50	6	6	0,020	○	
UVT0606 ALTiN	6	16	50	6	6	0,020	○	
UVT0806 ALTiN	8	20	60	8	6	0,050	○	
UVT1006 ALTiN	10	30	75	10	6	0,090	○	
UVT1206 ALTiN	12	32	75	12	6	0,120	○	
UVT1606 ALTiN	16	40	100	16	6	0,400	○	
UVT2008 ALTiN	20	45	100	20	8	0,600	○	
UVT2508 ALTiN	25	45	100	25	8	0,940	○	
ULVT0606 ALTiN	6	25	75	6	6	0,020	○	
ULVT0806 ALTiN	8	30	75	8	6	0,050	○	
ULVT1006 ALTiN	10	40	100	10	6	0,090	○	
ULVT1206 ALTiN	12	45	100	12	6	0,120	○	
ULVT1606 ALTiN	16	65	150	16	6	0,400	○	
ULVT2008 ALTiN	20	75	150	20	8	0,600	○	
ULVT2508 ALTiN	25	80	150	25	8	0,940	○	

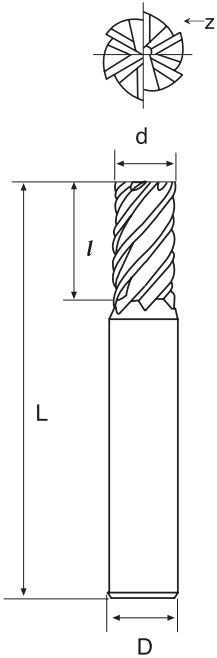

Application: ☒ Recommend ☐ Suitable ☒ Not Recommend


Carbon steel, Alloy steel	Pre-harden steel	High-hardened				Stainless steel	Copper alloy	Aluminun alloy
	~45HRC	~50HRC	~55HRC	~60HRC	~65HRC			
☐	☒	☐	☐	☐	-	☐	-	-

SQUARE SERIES - FOR HARD MATERIAL - MULTIPLE FLUTE

- Super Ultra Fine Micro Grain Carbide
- WC=91 Co=9 HRA=93.2 Rupture=4000N/mm² Grain Size=0.2µm




SFUVT SFULVT	Diameter	Flute Length	Full Length	Shank Diameter	Flutes	KG	STOCK	PRICELIST on getooling.com
	d	l	L	D	Z			
SFUVT0606 nACo	6	15	60	6	6	0,020	○	
SFUVT0806 nACo	8	20	60	8	6	0,050	○	
SFUVT1006 nACo	10	25	75	10	6	0,090	○	
SFUVT1206 nACo	12	30	75	12	6	0,120	○	
SFUVT1606 nACo	16	45	100	16	6	0,400	○	
SFUVT2008 nACo	20	45	100	20	8	0,600	○	
SFUVT2508 nACo	25	45	100	25	8	0,940	○	
SFULVT0606 nACo	6	25	75	6	6	0,020	○	
SFULVT0806 nACo	8	35	100	8	6	0,050	○	
SFULVT1006 nACo	10	45	100	10	6	0,090	○	
SFULVT1206 nACo	12	50	100	12	6	0,120	○	
SFULVT1606 nACo	16	65	150	16	6	0,400	○	
SFULVT2008 nACo	20	75	150	20	8	0,600	○	
SFULVT2508 nACo	25	80	150	25	8	0,940	○	

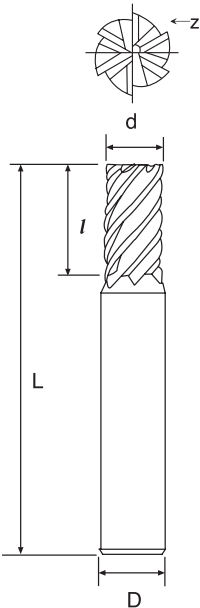

Application:								
■ Recommend □ Suitable x Not Recommend								
Carbon steel, Alloy steel	Pre-hardened steel ~45HRC	~50HRC	~55HRC	~60HRC	~65HRC	Stainless steel	Copper alloy	Aluminum alloy
□	□	□	■	■	■	□	-	-

FINE PITCH ROUGHING SERIES

- Micro Grain Carbide
- WC=88 Co=12 HRA=92.4 Rupture=3950N/mm² Grain Size=0.51µm



NTA

	Diameter	Flute Length	Full Length	Shank Diameter	Flutes	KG	STOCK	PRICELIST on getooling.com
d	l	L	D	Z				
NTA0504 AlTiN	5	13	50	6	4	0,020	○	
NTA0604 AlTiN	6	16	50	6	4	0,020	○	
NTA0704 AlTiN	7	16	60	8	4	0,040	○	
NTA0804 AlTiN	8	19	60	8	4	0,040	○	
NTA0904 AlTiN	9	25	75	10	4	0,080	○	
NTA1004 AlTiN	10	25	75	10	4	0,080	○	
NTA1104 AlTiN	11	30	75	12	4	0,110	○	
NTA1204 AlTiN	12	30	75	12	4	0,110	○	
NTA1404 AlTiN	14	35	100	16	4	0,260	○	
NTA1504 AlTiN	15	35	100	16	4	0,270	○	
NTA1604 AlTiN	16	35	100	16	4	0,280	○	
NTA2004 AlTiN	20	45	100	20	4	0,400	○	

Application: ■ Recommend □ Suitable x Not Recommend


Carbon steel, Alloy steel	Pre-hardened steel	High-hardened			Stainless steel	Copper alloy	Aluminum alloy
	~45HRC	~50HRC	~55HRC	~60HRC	~65HRC		
■	■	□	□	□	-	■	□

ROUGHING SERIES

- Micro Grain Carbide
- WC=88 Co=12 HRA=92.4 Rupture=3950N/mm² Grain Size=0.51µm



XTA	Diameter	Flute Length	Full Length	Shank Diameter	Flutes	KG	STOCK	PRICELIST on gettooling.com
	d	l	L	D	Z			
XTA0504 AITiN	5	13	50	6	4	0,020	○	
XTA0604 AITiN	6	16	50	6	4	0,020	○	
XTA0704 AITiN	7	16	60	8	4	0,040	○	
XTA0804 AITiN	8	19	60	8	4	0,040	○	
XTA0904 AITiN	9	25	75	10	4	0,080	○	
XTA1004 AITiN	10	25	75	10	4	0,080	○	
XTA1104 AITiN	11	30	75	12	4	0,110	○	
XTA1204 AITiN	12	30	75	12	4	0,110	○	
XTA1604 AITiN	16	35	100	16	4	0,280	○	
XTA2004 AITiN	20	45	100	20	4	0,400	○	



Application: ☒ Recommend ☐ Suitable ☒ Not Recommend

Carbon steel, Alloy steel	Pre-harden steel		High-hardened			Stainless steel	Copper alloy	Aluminun alloy
	~45HRC	~50HRC	~55HRC	~60HRC	~65HRC			
☒	☒	☐	☐	☐	-	☒	☐	☐


KKF MULTI FLUTES HIGH EFFICIENCY

- Ultra Micro Grain Carbide
- WC=87 Co=12 HRA=92.1 Rupture=3800N/mm² Grain Size=0.41Jm



KKF	Diameter	Flute Length	Full Length	Shank Diameter	Flutes	KG	STOCK	PRICELIST on getooling.com
	d	l	L	D	Z			
KKF0602	6	16	50	6	2	0,020	○	
KKF0802	8	19	60	8	2	0,040	○	
KKF1002	10	25	75	10	2	0,080	○	
KKF1202	12	30	75	12	2	0,080	○	
KKF1602	16	35	110	16	2	0,280	○	
KKF2002	20	45	110	20	2	0,400	○	

KKF	Diameter	Flute Length	Full Length	Shank Diameter	Flutes	KG	STOCK	PRICELIST on getooling.com
	d	l	L	D	Z			
KKF0603	6	16	50	6	3	0,020	○	
KKF0803	8	19	60	8	3	0,040	○	
KKF1003	10	25	75	10	3	0,080	○	
KKF1203	12	30	75	12	3	0,110	○	
KKF1603	16	35	110	16	3	0,280	○	
KKF2003	20	45	110	20	3	0,400	○	

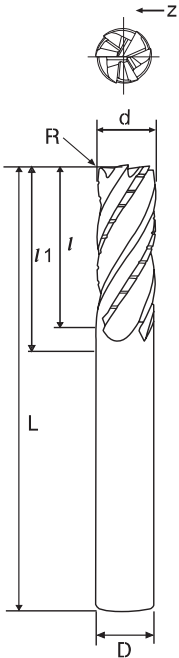


Application: ☒ Recommend ☐ Suitable ☒ Not Recommend

Carbon steel, Alloy steel	Pre-harden steel	High-hardened			Stainless steel	Copper alloy	Aluminun alloy
	~45HRC	~50HRC	~55HRC	~60HRC	~65HRC		
☒	☒	☒	☐	☐	-	-	-

KKR MULTI FLUTES HIGH EFFICIENCY

- Ultra Micro Grain Carbide
- WC=87 Co=12 HRA=92.1 Rupture=3800N/mm² Grain Size=0.41Jm



KKR	Diameter	Flute Length	Full Length	Shank Diameter	Flutes	KG	STOCK	PRICELIST on getooling.com
	d	l	L	D	Z			
KKR0602	6	16	50	6	2	0,020	○	
KKR0802	8	19	60	8	2	0,040	○	
KKR1002	10	25	75	10	2	0,080	○	
KKR1202	12	30	75	12	2	0,110	○	
KKR1602	16	35	110	16	2	0,280	○	
KKR2002	20	45	110	20	2	0,400	○	
KKR2502	25	50	110	25	2	0,670	○	


KKR	Diameter	Flute Length	Full Length	Shank Diameter	Flutes	KG	STOCK	PRICELIST on getooling.com
	d	l	L	D	Z			
KKR0603	6	16	50	6	3	0,020	○	
KKR0803	8	19	60	8	3	0,040	○	
KKR1003	10	25	75	10	3	0,080	○	
KKR1203	12	30	75	12	3	0,110	○	
KKR1603	16	35	110	16	3	0,280	○	
KKR2003	20	45	110	20	3	0,400	○	
KKR2503	25	50	110	25	3	0,670	○	

Application: ☒ Recommend ☐ Suitable ☒ Not Recommend

Carbon steel, Alloy steel	Pre-hardened steel		High-hardened			Stainless steel	Copper alloy	Aluminum alloy
	~45HRC	~50HRC	~55HRC	~60HRC	~65HRC			
☒	☒	☒	☐	☐	-	-	-	-

KKM MULTI FLUTES HIGH EFFICIENCY

- Ultra Micro Grain Carbide
- WC=87 Co=12 HRA=92.1 Rupture=3800N/mm² Grain Size=0.41µm

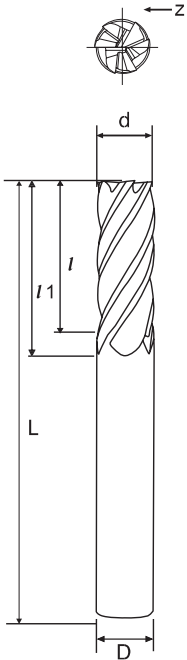

KKM	Diameter	Flute Length	Full Length	Shank Diameter	Flutes	KG	STOCK	PRICELIST on getooling.com
	d	l	L	D	Z			
KKM0602	6	16	50	6	2	0,020	○	
KKM0802	8	19	60	8	2	0,040	○	
KKM1002	10	22	75	10	2	0,080	○	
KKM1202	12	26	75	12	2	0,110	○	
KKM1602	16	35	110	16	2	0,280	○	
KKM2002	20	40	110	20	2	0,400	○	
KKM2502	25	45	110	25	2	0,670	○	

KKM	Diameter	Flute Length	Full Length	Shank Diameter	Flutes	KG	STOCK	PRICELIST on getooling.com
	d	l	L	D	Z			
KKM0603	6	16	50	6	3	0,020	○	
KKM0803	8	19	60	8	3	0,040	○	
KKM1003	10	25	75	10	3	0,080	○	
KKM1203	12	30	75	12	3	0,110	○	
KKM1603	16	40	110	16	3	0,280	○	
KKM2003	20	45	110	20	3	0,400	○	
KKM2503	25	50	110	25	3	0,670	○	



KKM	Diameter	Flute Length	Full Length	Shank Diameter	Flutes	KG	STOCK	PRICELIST on getooling.com
	d	l	L	D	Z			
KKM1004	10	25	75	10	4	0,080	○	
KKM1204	12	30	75	12	4	0,110	○	
KKM1604	16	40	110	16	4	0,280	○	
KKM2004	20	45	110	20	4	0,400	○	
KKM2504	25	50	110	25	4	0,670	○	

Application: ☒ Recommend ☐ Suitable ☒ Not Recommend

Carbon steel, Alloy steel	Pre-harden steel ~45HRC	~50HRC	High-hardened ~55HRC	~60HRC	~65HRC	Stainless steel	Copper alloy	Aluminun alloy
■	■	■	■	□	-	-	-	-

KKH MULTI FLUTES HIGH EFFICIENCY

- Ultra Micro Grain Carbide
- WC=87 Co=12 HRA=92.1 Rupture=3800N/mm² Grain Size=0.41µm



KKH	Diameter	Flute Length	Full Length	Shank Diameter	Flutes	KG	STOCK	PRICELIST on getooling.com
	d	l	L	D	Z			
KKH0602	6	16	50	6	2	0,020	○	
KKH0802	8	19	60	8	2	0,040	○	
KKH1002	10	22	75	10	2	0,080	○	
KKH1202	12	26	75	12	2	0,110	○	
KKH1602	16	35	110	16	2	0,280	○	
KKH2002	20	40	110	20	2	0,400	○	
KKH2502	25	45	110	25	2	0,670	○	

KKH	Diameter	Flute Length	Full Length	Shank Diameter	Flutes	KG	STOCK	PRICELIST on getooling.com
	d	l	L	D	Z			
KKH0603	6	16	50	6	3	0,020	○	
KKH0803	8	19	60	8	3	0,040	○	
KKH1003	10	25	75	10	3	0,080	○	
KKH1203	12	30	75	12	3	0,110	○	
KKH1603	16	40	110	16	3	0,280	○	
KKH2003	20	45	110	20	3	0,400	○	
KKH2503	25	50	110	25	3	0,670	○	


KKH	Diameter	Flute Length	Full Length	Shank Diameter	Flutes	KG	STOCK	PRICELIST on getooling.com
	d	l	L	D	Z			
KKH1004	10	25	75	10	4	0,080	○	
KKH1204	12	30	75	12	4	0,110	○	
KKH1604	16	40	110	16	4	0,280	○	
KKH2004	20	45	110	20	4	0,400	○	
KKH2504	25	50	110	25	4	0,670	○	

Application: ☒ Recommend ☐ Suitable ☒ Not Recommend


Carbon steel, Alloy steel	Pre-harden steel		High-hardened			Stainless steel	Copper alloy	Aluminun alloy
	~45HRC	~50HRC	~55HRC	~60HRC	~65HRC			
☒	☒	☒	☒	☐	-	-	-	-

KKM MULTI FLUTES HIGH EFFICIENCY

- Ultra Micro Grain Carbide
- WC=87 Co=12 HRA=92.1 Rupture=3800N/mm² Grain Size=0.41µm

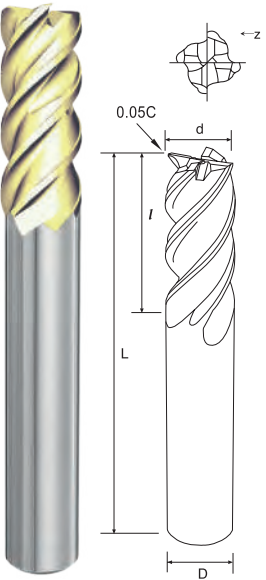

PVE	Diameter	Flute Length	Full Length	Shank Diameter	Flutes	Corner Chamfer Width	KG	STOCK	PRICELIST on getooling.com
PVE1T0404	4	8	50	6	4	0.2	0,021	○	
PVE1T0504	5	10	50	6	4	0.25	0,021	○	
PVE1T0604	6	12	50	6	4	0.3	0,021	○	
PVE1T0804	8	19	60	8	4	0.4	0,047	○	
PVE1T1004	10	23	75	10	4	0.5	0,090	○	
PVE1T1204	12	27	75	12	4	0.6	0,118	○	
PVE1T1604	16	32	100	16	4	0.8	0,270	○	
PVE1T2004	20	39	100	20	4	1	0,390	○	

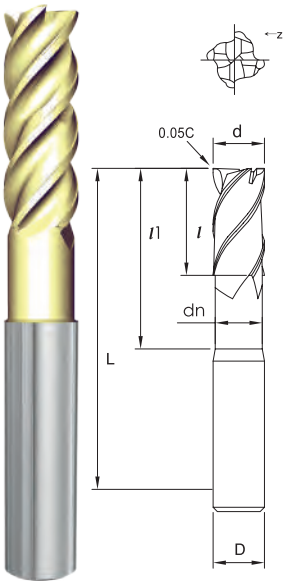


PNVE	Diameter	Flute Length	Efficient Leng	Full Length	Shank Diameter	Flutes	Corner Chamfer Width	Neck Diameter	KG	STOCK	PRICELIST on getooling.com
PNVE1T0404	4	6	22	75	6	4	0.2	3.7	0,026	○	
PNVE1T0504	5	8	24	75	6	4	0.25	4.6	0,026	○	
PNVE1T0604	6	9	26	75	6	4	0.3	5.5	0,026	○	
PNVE1T0804	8	12	35	100	8	4	0.4	7.4	0,073	○	
PNVE1T1004	10	15	43	120	10	4	0.5	9.2	0,140	○	
PNVE1T1204	12	18	51	120	12	4	0.6	11	0,240	○	
PNVE1T1604	16	24	59	120	16	4	0.8	15	0,360	○	

Application: ☒ Recommend ☐ Suitable x Not Recommend

	Pre-hardened steel	High-hardened		carbon steel, Alloy steel	Stainless steel	Titanium alloy	Nickel/ Inconel alloy	Copper alloy	Aluminun alloy
<30HRC	30~40HRC	40~50HRC	50~65HRC						
-	■	□	-	-	-	■	■	-	-

HPSS SUPER PLUGGING+SLOTTING

- Ultra Micro Grain Carbide
- WC=87 Co=12 HRA=92.1 Rupture=3800N/mm² Grain Size=0.41Jm

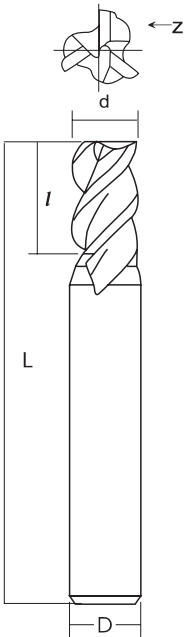

HPSS	Diameter	Flute Length	Full Length	Shank Diameter	Flutes	KG	STOCK	PRICELIST on getooling.com
	d	l	L	D	Z			
HPSS0200	2	4	50	6	3	0,020	○	
HPSS0250	2.5	5	50	6	3	0,020	○	
HPSS0300	3	6	50	6	3	0,020	○	
HPSS0350	3.5	8	50	6	3	0,020	○	
HPSS0400	4	8	50	6	3	0,020	○	
HPSS0450	4.5	10	50	6	3	0,020	○	
HPSS0500	5	10	50	6	3	0,020	○	
HPSS0550	5.5	13	50	6	3	0,020	○	
HPSS0600	6	13	60	6	3	0,020	○	
HPSS0650	6.5	16	60	8	3	0,020	○	
HPSS0700	7	16	60	8	3	0,040	○	
HPSS0750	7.5	16	60	8	3	0,040	○	
HPSS0800	8	19	60	8	3	0,040	○	
HPSS0850	8.5	19	75	10	3	0,080	○	
HPSS0900	9	19	75	10	3	0,080	○	
HPSS0950	9.5	19	75	10	3	0,080	○	
HPSS1000	10	22	75	10	3	0,090	○	
HPSS1100	11	22	75	12	3	0,110	○	
HPSS1200	12	26	100	12	3	0,150	○	
HPSS1300	13	26	100	14	3	0,180	○	
HPSS1400	14	26	100	14	3	0,200	○	
HPSS1500	15	26	100	16	3	0,230	○	
HPSS1600	16	30	100	16	3	0,260	○	
HPSS2000	20	32	100	20	3	0,380	○	

Application: ☒ Recommend ☐ Suitable ☒ Not Recommend

Carbon steel, Alloy steel	Pre-hardened steel ~45HRC	~50HRC	High-hardened ~55HRC	~60HRC	~65HRC	Stainless steel	Copper alloy	Aluminun alloy
■	■	□	-	-	-	-	-	-

FHPS 4 FLUTES • SHORT – (HEAVY- DUTY OPERATION TYPE)

- Ultra Micro Grain Carbide
- WC=87 Co=12 HRA=92.1 Rupture=3800N/mm² Grain Size=0.41Jm




FHPS	Diameter	Flute Length	Full Length	Shank Diameter	Flutes	KG	STOCK	PRICELIST on getooling.com
	d	l	L	D	Z			
FHPS020	2	3	50	6	4	0,020	●	
FHPS021	2.1	3.2	50	6	4	0,020	●	
FHPS022	2.2	3.3	50	6	4	0,020	●	
FHPS023	2.3	3.5	50	6	4	0,020	●	
FHPS024	2.4	3.6	50	6	4	0,020	●	
FHPS025	2.5	3.8	50	6	4	0,020	●	
FHPS026	2.6	3.9	50	6	4	0,020	●	
FHPS027	2.7	4.1	50	6	4	0,020	●	
FHPS028	2.8	4.2	50	6	4	0,020	●	
FHPS029	2.9	4.4	50	6	4	0,020	●	
FHPS030	3	4.5	50	6	4	0,020	●	
FHPS031	3.1	4.7	50	6	4	0,020	●	
FHPS032	3.2	4.8	50	6	4	0,020	●	
FHPS033	3.3	5	50	6	4	0,020	●	
FHPS034	3.4	5.1	50	6	4	0,020	●	
FHPS035	3.5	5.3	50	6	4	0,020	●	
FHPS036	3.6	5.4	50	6	4	0,020	●	
FHPS037	3.7	5.6	50	6	4	0,020	●	
FHPS038	3.8	5.7	50	6	4	0,020	●	
FHPS039	3.9	5.9	50	6	4	0,020	●	
FHPS040	4	6	50	6	4	0,020	●	
FHPS041	4.1	6.2	50	6	4	0,020	●	
FHPS042	4.2	6.3	50	6	4	0,020	●	
FHPS043	4.3	6.5	50	6	4	0,020	●	
FHPS044	4.4	6.6	50	6	4	0,020	●	
FHPS045	4.5	6.8	50	6	4	0,020	●	
FHPS046	4.6	6.9	50	6	4	0,020	●	
FHPS047	4.7	7.1	50	6	4	0,020	●	
FHPS048	4.8	7.2	50	6	4	0,020	●	
FHPS049	4.9	7.4	50	6	4	0,020	●	
FHPS050	5	7.5	50	6	4	0,020	●	
FHPS051	5.1	7.7	50	6	4	0,020	●	
FHPS052	5.2	7.8	50	6	4	0,020	●	
FHPS053	5.3	8	50	6	4	0,020	●	
FHPS054	5.4	8.1	50	6	4	0,020	●	
FHPS055	5.5	8.3	50	6	4	0,020	●	

Application: ☒ Recommend ☐ Suitable ☒ Not Recommend

Carbon steel, Alloy steel	Pre-hardened steel	High-hardened			Stainless steel	Copper alloy	Aluminun alloy
	~45HRC	~50HRC	~55HRC	~60HRC	~65HRC		
■	■	■	□	□	-	-	-

HPSS SUPER PLUGGING+SLOTTING

- Ultra Micro Grain Carbide
- WC=87 Co=12 HRA=92.1 Rupture=3800N/mm² Grain Size=0.4 m

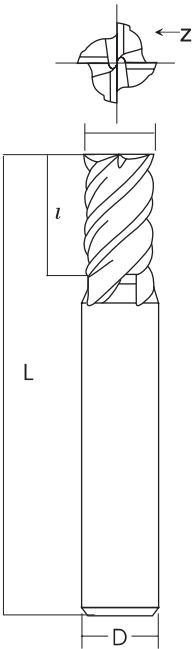

FHP	Diameter	Flute Length	Full Length	Shank Diameter	Flutes	KG	STOCK	PRICELIST on getooling.com
	d	l	L	D	Z			
FHPS056	5.6	8.4	50	6	4	0,020	●	
FHPS057	5.7	8.6	50	6	4	0,020	●	
FHPS058	5.8	8.7	50	6	4	0,020	●	
FHPS059	5.9	8.9	50	6	4	0,020	●	
FHPS060	6	9	50	6	4	0,020	●	
FHPS061	6.1	9.2	60	8	4	0,040	●	
FHPS062	6.2	9.3	60	8	4	0,040	●	
FHPS063	6.3	9.5	60	8	4	0,040	●	
FHPS064	6.4	9.6	60	8	4	0,040	●	
FHPS065	6.5	9.8	60	8	4	0,040	●	
FHPS066	6.6	9.9	60	8	4	0,040	●	
FHPS067	6.7	10.1	60	8	4	0,040	●	
FHPS068	6.8	10.2	60	8	4	0,040	●	
FHPS069	6.9	10.4	60	8	4	0,040	●	
FHPS070	7	10.5	60	8	4	0,040	●	
FHPS071	7.1	10.7	60	8	4	0,040	●	
FHPS072	7.2	10.8	60	8	4	0,040	●	
FHPS073	7.3	11	60	8	4	0,040	●	
FHPS074	7.4	11.1	60	8	4	0,040	●	
FHPS075	7.5	11.3	60	8	4	0,040	●	
FHPS076	7.6	11.4	60	8	4	0,040	●	
FHPS077	7.7	11.6	60	8	4	0,040	●	
FHPS078	7.8	11.7	60	8	4	0,040	●	
FHPS079	7.9	11.9	60	8	4	0,040	●	
FHPS080	8	12	60	8	4	0,040	●	
FHPS081	8.1	12.2	75	10	4	0,080	●	
FHPS082	8.2	12.3	75	10	4	0,080	●	
FHPS083	8.3	12.5	75	10	4	0,080	●	
FHPS084	8.4	12.6	75	10	4	0,080	●	
FHPS085	8.5	12.8	75	10	4	0,080	●	
FHPS086	8.6	12.9	75	10	4	0,080	●	
FHPS087	8.7	13.1	75	10	4	0,080	●	
FHPS088	8.8	13.2	75	10	4	0,080	●	
FHPS089	8.9	13.4	75	10	4	0,080	●	
FHPS090	9	13.5	75	10	4	0,080	●	
FHPS091	9.1	13.7	75	10	4	0,080	●	

Application: ☒ Recommend ☐ Suitable ☒ Not Recommend

Carbon steel, Alloy steel	Pre-harden steel	High-hardened			Stainless steel	Copper alloy	Aluminun alloy
	~45HRC	~50HRC	~55HRC	~60HRC	~65HRC		
☒	☒	☒	☐	☐	-	-	-

FHPS 4 FLUTES • SHORT – (HEAVY- DUTY OPERATION TYPE)

- Ultra Micro Grain Carbide
- WC=87 Co=12 HRA=92.1 Rupture=3800N/mm² Grain Size=0.41µm




FHPS	Diameter	Flute Length	Full Length	Shank Diameter	Flutes	KG	STOCK	PRICELIST on getooling.com
	d	l	L	D	Z			
FHPS092	9.2	13.8	75	10	4	0,080	●	
FHPS093	9.3	14	75	10	4	0,080	●	
FHPS094	9.4	14.1	75	10	4	0,080	●	
FHPS095	9.5	14.3	75	10	4	0,080	●	
FHPS096	9.6	14.4	75	10	4	0,080	●	
FHPS097	9.7	14.6	75	10	4	0,080	●	
FHPS098	9.8	14.7	75	10	4	0,090	●	
FHPS099	9.9	14.9	75	10	4	0,090	●	
FHPS100	10	15	75	10	4	0,100	●	
FHPS105	10.5	15.8	100	12	4	0,120	●	
FHPS110	11	16.5	100	12	4	0,150	●	
FHPS115	11.5	17.3	100	12	4	0,160	●	
FHPS120	12	18	100	12	4	0,160	●	
FHPS125	12.5	18.8	100	14	4	0,180	●	
FHPS130	13	19.5	100	14	4	0,200	●	
FHPS135	13.5	20.3	100	14	4	0,250	●	
FHPS140	14	21	100	14	4	0,260	●	
FHPS145	14.5	21.8	100	16	4	0,280	●	
FHPS150	15	22.5	100	16	4	0,280	●	
FHPS155	15.5	23.3	100	16	4	0,290	●	
FHPS160	16	24	100	16	4	0,290	●	
FHPS170	17	25.5	100	20	4	0,310	●	
FHPS180	18	27	100	20	4	0,330	●	
FHPS190	19	28.5	100	20	4	0,350	●	
FHPS200	20	30	100	20	4	0,370	●	

Application: ☒ Recommend ☐ Suitable ☒ Not Recommend

Carbon steel, Alloy steel	Pre-harden steel	High-hardened			Stainless steel	Copper alloy	Aluminun alloy
	~45HRC	~50HRC	~55HRC	~60HRC	~65HRC		
■	■	■	□	□	-	-	-

UMG - CR- FHP 4 FLUTES • SHORT WITH CORNER – RADIUS (HEAVY- DUTY OPERATION TYPE)

- Ultra Micro Grain Carbide
- WC=87 Co=12 HRA=92.1 Rupture=3800N/mm² Grain Size=0.41µm

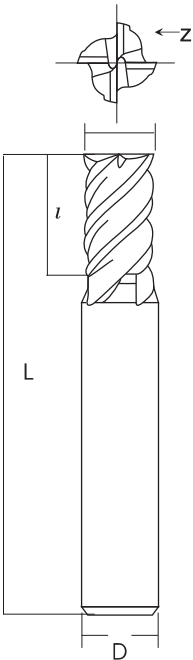

CRFHP	Diameter	Corner Radius	Flute Length	Full Length	Shank Diameter	Flutes	KG	STOCK	PRICELIST on getooling.com
	d	R	l	L	D	Z			
CRFHP0302	3	0.2	8	60	6	4	0,020	●	
CRFHP0305	3	0.5	8	60	6	4	0,020	●	
CRFHP0402	4	0.2	11	60	6	4	0,020	●	
CRFHP0405	4	0.5	11	60	6	4	0,020	●	
CRFHP0410	4	1	11	60	6	4	0,020	●	
CRFHP0502	5	0.2	13	60	6	4	0,020	●	
CRFHP0505	5	0.5	13	60	6	4	0,020	●	
CRFHP0510	5	1	13	60	6	4	0,020	●	
CRFHP0603	6	0.3	13	60	6	4	0,020	●	
CRFHP0605	6	0.5	13	60	6	4	0,020	●	
CRFHP0610	6	1	13	60	6	4	0,020	●	
CRFHP0803	8	0.3	19	60	8	4	0,040	●	
CRFHP0805	8	0.5	19	60	8	4	0,050	●	
CRFHP0810	8	1	19	60	8	4	0,040	●	
CRFHP0815	8	1.5	19	60	8	4	0,040	●	
CRFHP0820	8	2	19	60	8	4	0,040	●	
CRFHP1003	10	0.3	22	75	10	4	0,090	●	
CRFHP1005	10	0.5	22	75	10	4	0,080	●	
CRFHP1010	10	1	22	75	10	4	0,090	●	
CRFHP1015	10	1.5	22	75	10	4	0,080	●	
CRFHP1020	10	2	22	75	10	4	0,080	●	
CRFHP1030	10	3	22	75	10	4	0,080	●	
CRFHP1205	12	0.5	26	100	12	4	0,160	●	
CRFHP1210	12	1	26	100	12	4	0,150	●	
CRFHP1215	12	1.5	26	100	12	4	0,150	●	
CRFHP1220	12	2	26	100	12	4	0,160	●	
CRFHP1230	12	3	26	100	12	4	0,160	●	
CRFHP1610	16	1	35	100	16	4	0,170	●	
CRFHP1615	16	1.5	35	100	16	4	0,200	●	
CRFHP1620	16	2	35	100	16	4	0,290	●	
CRFHP1630	16	3	35	100	16	4	0,290	●	
CRFHP2010	20	1	40	100	20	4	0,330	●	
CRFHP2015	20	1.5	40	100	20	4	0,360	●	
CRFHP2020	20	2	40	100	20	4	0,390	●	
CRFHP2030	20	3	40	100	20	4	0,410	●	

Application: ☒ Recommend ☐ Suitable ☒ Not Recommend

Carbon steel, Alloy steel	Pre-harden steel		High-hardened			Stainless steel	Copper alloy	Aluminun alloy
	~45HRC	~50HRC	~55HRC	~60HRC	~65HRC			
☒	☒	☒	☐	☐	-	-	-	-

CORNER RADIUS SERIES - 3 FLUTES

- Micro Grain Carbide
- WC=88 Co=12 HRA=92.4 Rupture=3950N/mm² Grain Size=0.5 m



SURTA	Diameter	Radius of Ball Nose	Flute Length	Full Length	Shank Diameter	Flutes	KG	STOCK	PRICELIST on getooling.com
	d	R	l	L	D	Z			
SURTA0200203 TiSiN	2	0.2	6	50	4	3	0,010	○	
SURTA0200253 TiSiN	2	0.25	6	50	4	3	0,010	○	
SURTA0200303 TiSiN	2	0.3	6	50	4	3	0,010	○	
SURTA0200503 TiSiN	2	0.5	6	50	4	3	0,010	○	
SURTA0300203 TiSiN	3	0.2	10	50	3	3	0,010	○	
SURTA0300303 TiSiN	3	0.3	10	50	3	3	0,010	○	
SURTA0300503 TiSiN	3	0.5	10	50	3	3	0,010	○	
SURTA0301003 TiSiN	3	1	10	50	3	3	0,010	○	
SURTA4300203 TiSiN	3	0.2	10	50	4	3	0,110	○	
SURTA4300253 TiSiN	3	0.25	10	50	4	3	0,110	○	
SURTA4300303 TiSiN	3	0.3	10	50	4	3	0,110	○	
SURTA4300503 TiSiN	3	0.5	10	50	4	3	0,110	○	
SURTA4300753 TiSiN	3	0.75	10	50	4	3	0,110	○	
SURTA4301003 TiSiN	3	1	10	50	4	3	0,110	○	
SURTA0400203 TiSiN	4	0.2	13	60	4	3	0,010	○	
SURTA0400253 TiSiN	4	0.25	13	60	4	3	0,010	○	
SURTA0400303 TiSiN	4	0.3	13	60	4	3	0,010	○	
SURTA0400503 TiSiN	4	0.5	13	60	4	3	0,020	○	
SURTA0400753 TiSiN	4	0.75	13	60	4	3	0,020	○	
SURTA0401003 TiSiN	4	1	13	60	4	3	0,020	○	
SURTA0500203 TiSiN	5	0.2	15	60	5	3	0,020	○	
SURTA0500253 TiSiN	5	0.25	15	60	5	3	0,020	○	
SURTA0500303 TiSiN	5	0.3	15	60	5	3	0,020	○	
SURTA0500503 TiSiN	5	0.5	15	60	5	3	0,020	○	
SURTA0500753 TiSiN	5	0.75	15	60	5	3	0,020	○	
SURTA0501003 TiSiN	5	1	15	60	5	3	0,030	○	
SURTA0600203 TiSiN	6	0.2	16	70	6	3	0,030	○	
SURTA0600253 TiSiN	6	0.25	16	70	6	3	0,030	○	
SURTA0600303 TiSiN	6	0.3	16	70	6	3	0,030	○	

Application: ☒ Recommend ☐ Suitable ☒ Not Recommend									
Carbon steel, Alloy steel	Pre-hardened steel		High-hardened			Stainless steel	Copper alloy	Aluminun alloy	
	~45HRC	~50HRC	~55HRC	~60HRC	~65HRC				
☒	☒	☐	☐	☐	-	☒	☐	☐	

CORNER RADIUS SERIES - 3 FLUTES

• Micro Grain Carbide
• WC=88 Co=12 HRA=92. 4 Rupture= 3950N/mm² Grain Size=0 .S m



SURTA	Diameter	Radius of Ball Nose	Flute Length	Full Length	Shank Diameter	Flutes	KG	STOCK	PRICELIST on getooling.com
	d	R	l	L	D	Z			
SURTA0600503 TiSiN	6	0.5	16	70	6	3	0,030	○	
SURTA0600753 TiSiN	6	0.75	16	70	6	3	0,030	○	
SURTA0601003 TiSiN	6	1	16	70	6	3	0,030	○	
SURTA0601253 TiSiN	6	1.25	16	70	6	3	0,030	○	
SURTA0601503 TiSiN	6	1.5	16	70	6	3	0,050	○	
SURTA0800253 TiSiN	8	0.25	23	70	8	3	0,050	○	
SURTA0800303 TiSiN	8	0.3	23	70	8	3	0,050	○	
SURTA0800503 TiSiN	8	0.5	23	70	8	3	0,050	○	
SURTA0800753 TiSiN	8	0.75	23	70	8	3	0,050	○	
SURTA0801003 TiSiN	8	1	23	70	8	3	0,050	○	
SURTA0801253 TiSiN	8	1.25	23	70	8	3	0,050	○	
SURTA0801503 TiSiN	8	1.5	23	70	8	3	0,090	○	
SURTA0802003 TiSiN	8	2	23	70	8	3	0,090	○	
SURTA1000253 TiSiN	10	0.25	25	80	10	3	0,090	○	
SURTA1000303 TiSiN	10	0.3	25	80	10	3	0,090	○	
SURTA1000503 TiSiN	10	0.5	25	80	10	3	0,090	○	
SURTA1000753 TiSiN	10	0.75	25	80	10	3	0,090	○	
SURTA1001003 TiSiN	10	1	25	80	10	3	0,090	○	
SURTA1001253 TiSiN	10	1.25	25	80	10	3	0,090	○	
SURTA1001503 TiSiN	10	1.5	25	80	10	3	0,110	○	
SURTA1002003 TiSiN	10	2	25	80	10	3	0,110	○	
SURTA1002503 TiSiN	10	2.5	25	80	10	3	0,110	○	
SURTA1200303 TiSiN	12	0.3	30	80	12	3	0,110	○	
SURTA1200503 TiSiN	12	0.5	30	80	12	3	0,110	○	
SURTA1201003 TiSiN	12	1	30	80	12	3	0,110	○	
SURTA1201253 TiSiN	12	1.25	30	80	12	3	0,110	○	
SURTA1201503 TiSiN	12	1.5	30	80	12	3	0,110	○	
SURTA1202003 TiSiN	12	2	30	80	12	3	0,110	○	
SURTA1202503 TiSiN	12	2.5	30	80	12	3	0,110	○	
SURTA1203003 TiSiN	12	3	30	80	12	3	0,110	○	

Application: ☒ Recommend ☐ Suitable ☒ Not Recommend


Carbon steel, Alloy steel	Pre-hardened steel		High-hardened			Stainless steel	Copper alloy	Aluminum alloy
	~45HRC	~50HRC	~55HRC	~60HRC	~65HRC			
☒	☒	☐	☐	☐	-	☒	☐	☐

SUS STAINLESS STEEL EXPERT

- Micro Grain Carbide
- WC=88 Co=12 HRA=92.4 Rupture=3950N/mm² Grain Size=0.5 m



SUS	Diameter	Flute Length	Full Length	Shank Diameter	Flutes	KG	STOCK	PRICELIST on getooling.com
	d	l	L	D	Z			
SUS0104	1	3	50	4	4	0,020	○	
SUS0154	1.5	4	50	4	4	0,020	○	
SUS0204	2	6	50	4	4	0,040	○	
SUS0254	2.5	8	50	4	4	0,040	○	
SUS0304	3	9	50	4	4	0,080	○	
SUS6304	3	9	50	6	4	0,600	○	
SUS0404	4	11	50	4	4	0,080	○	
SUS6404	4	11	50	6	4	0,600	○	
SUS0504	5	13	50	6	4	0,110	○	
SUS0604	6	16	50	6	4	0,110	○	
SUS0804	8	20	60	8	4	0,280	○	
SUS1004	10	30	75	10	4	0,400	○	
SUS1204	12	32	75	12	4	0,400	○	

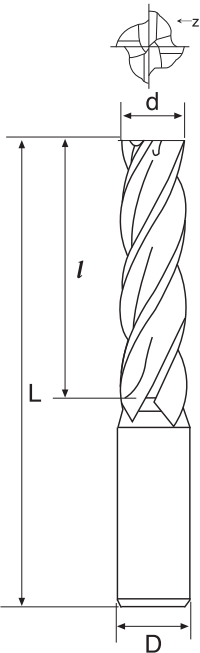


Application: ☒ Recommend ☐ Suitable ☒ Not Recommend


Carbon steel, Alloy steel	Pre-harden steel	High-hardened				Stainless steel	Copper alloy	Aluminun alloy
	~45HRC	~50HRC	~55HRC	~60HRC	~65HRC			
☐	☐	-	-	-	-	☒	-	-

U-TYPE ALUMINUM

- Micro Grain Carbide
- WC=90 Co=10 HV30=1571 Rupture=3750N/mm² Grain Size=0.6µm

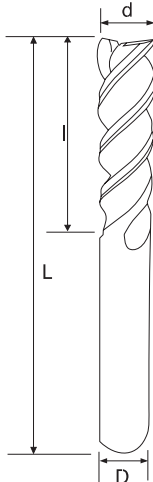

AUE	Diameter	Flute Length	Full Length	Shank Diameter	Flutes	KG	STOCK	PRICELIST on getooling.com
	d	l	L	D	Z			
AUE0253	2.5	8	50	6	3	0,020	○	
AUE0303	3	9	50	6	3	0,020	○	
AUE0403	4	12	50	6	3	0,020	○	
AUE0503	5	15	50	6	3	0,020	○	
AUE0603	6	18	50	6	3	0,020	○	
AUE0803	8	20	60	8	3	0,050	○	
AUE1003	10	30	75	10	3	0,090	○	
AUE1203	12	32	75	12	3	0,130	○	
AUE1603	16	45	100	16	3	0,300	○	
AUE2003	20	45	100	20	3	0,400	○	
AUEL0603	6	30	75	6	3	0,020	○	
AUEL0803	8	40	100	8	3	0,050	○	
AUEL1003	10	42	100	10	3	0,090	○	
AUEL1203	12	52	100	12	3	0,180	○	

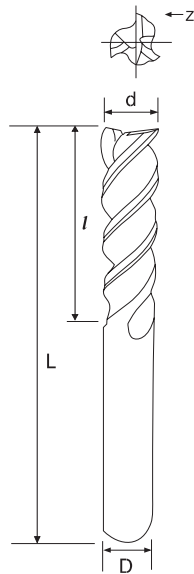


S-AUE	Diameter	Flute Length	Full Length	Shank Diameter	Flutes	KG	STOCK	PRICELIST on getooling.com
	d	l	L	D	Z			
S-AUE0603 TB	6	10	50	6	3	0,021	○	
S-AUE0803 TB	8	13	60	8	3	0,047	○	
S-AUE1003 TB	10	16	75	10	3	0,090	○	
S-AUE1203 TB	12	19	75	12	3	0,118	○	


Application: ☒ Recommend ☐ Suitable ☒ Not Recommend								
Carbon steel, Alloy steel	Pre-hardened steel	High-hardened			Stainless steel	Copper alloy	Aluminum alloy	
	~45HRC	~50HRC	~55HRC	~60HRC	~65HRC			
-	-	-	-	-	-	☐	☒	

SQUARE SERIES - FOR ALUMINUM - 3 FLUTES

- Micro Grain Carbide
- WC=90 Co=10 HV30=1571 Rupture=3750N/mm² Grain Size=0.6 m

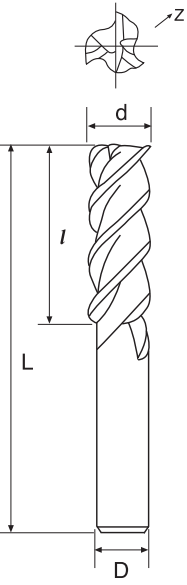

AET	Diameter	Flute Length	Full Length	Shank Diameter	Flutes	KG	STOCK	PRICELIST on getooling.com
	d	l	L	D	Z			
AET0103 TB	1	3	50	4	3	0,020	●	
AET0123 TB	1.2	4	50	4	3	0,020	●	
AET0153 TB	1.5	4	50	4	3	0,020	●	
AET0183 TB	1.8	5	50	4	3	0,020	●	
AET0203 TB	2	6	50	4	3	0,020	●	
AET0303 TB	3	8	50	6	3	0,020	●	
AET0403 TB	4	10	50	6	3	0,020	●	
AET0503 TB	5	13	50	6	3	0,020	●	
AET0603 TB	6	15	50	6	3	0,020	●	
AET0803 TB	8	20	60	8	3	0,060	●	
AET1003 TB	10	25	75	10	3	0,080	●	
AET1203 TB	12	30	75	12	3	0,080	●	
AET1603 TB	16	42	100	16	3	0,100	●	
AET2003 TB	20	52	100	20	3	0,120	●	
AET2503 TB	25	62	125	25	3	0,150	●	

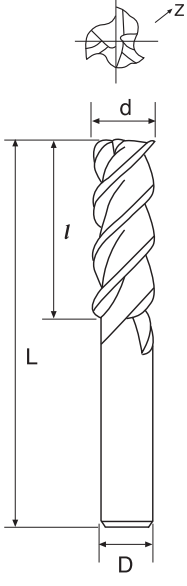

AEL	Diameter	Flute Length	Full Length	Shank Diameter	Flutes	KG	STOCK	PRICELIST on getooling.com
	d	l	L	D	Z			
AEL50303 TB	3	12	60	6	3	0,020	○	
AEL50403 TB	4	16	60	6	3	0,020	○	
AEL50503 TB	5	20	60	6	3	0,020	○	
AEL50603 TB	6	25	75	6	3	0,040	○	
AEL50803 TB	8	32	75	8	3	0,080	○	
AEL51003 TB	10	45	100	10	3	0,110	○	
AEL51203 TB	12	45	100	12	3	0,260	○	
AEL51603 TB	16	65	150	16	3	0,360	○	
AEL52003 TB	20	75	150	20	3	0,670	○	

Application: ☒ Recommend ☐ Suitable ☒ Not Recommend


Carbon steel, Alloy steel	Pre-hardened steel	High-hardened			Stainless steel	Copper alloy	Aluminum alloy
	~45HRC	~50HRC	~55HRC	~60HRC	~65HRC		
-	-	-	-	-	-	☐	☒

SQUARE SERIES - FOR ALUMINUM - 2 FLUTES

• Micro Grain Carbide
• WC=90 Co=10 HV30=1571 Rupture=3750N/mm² Grain Size=0.611m



AET	Diameter	Flute Length	Full Length	Shank Diameter	Flutes	KG	STOCK	PRICELIST on getooling.com
	d	l	L	D	Z			
AET0052 TB	0.5	1.5	50	4	2	0,020	○	
AET0062 TB	0.6	1.5	50	4	2	0,020	○	
AET0082 TB	0.8	2	50	4	2	0,020	○	
AET0102 TB	1	3	50	6	2	0,020	○	
AET0122 TB	1.2	4	50	6	2	0,020	○	
AET0152 TB	1.5	4	50	6	2	0,020	○	
AET0182 TB	1.8	5	50	6	2	0,020	○	
AET0202 TB	2	6	50	6	2	0,020	○	
AET0302 TB	3	8	50	6	2	0,020	○	
AET0402 TB	4	10	50	6	2	0,020	○	
AET0502 TB	5	13	50	6	2	0,020	○	
AET0602 TB	6	15	50	6	2	0,020	○	
AET0802 TB	8	20	60	8	2	0,040	○	
AET1002 TB	10	25	75	10	2	0,080	○	
AET1202 TB	12	30	75	12	2	0,110	○	
AET1602 TB	16	42	100	16	2	0,260	○	
AET2002 TB	20	52	100	20	2	0,360	○	
AET2502 TB	25	62	125	25	2	0,670	○	

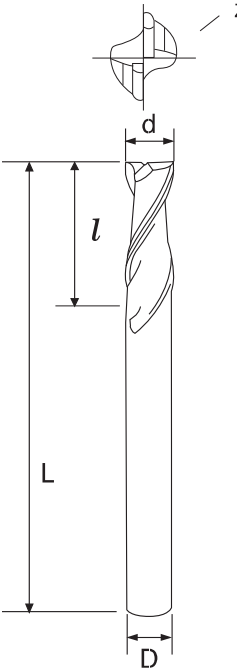


Application: ☒ Recommend ☐ Suitable ☒ Not Recommend

Carbon steel, Alloy steel	Pre-harden steel		High-hardened			Stainless steel	Copper alloy	Aluminun alloy
	~45HRC	~50HRC	~55HRC	~60HRC	~65HRC			
-	-	-	-	-	-	-	☐	☒

SQUARE SERIES - FOR WOOD & PLASTIC & ALUMINUM -1 FLUTE

- Micro Grain Carbide
- WC=90 Co=10 HV30=1571 Rupture=3750N/mm² Grain Size=0.6 m

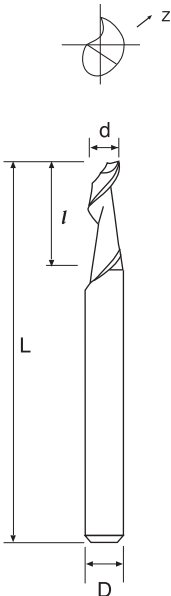



AP	Diameter	Flute Length	Full Length	Shank Diameter	Flutes	KG	STOCK	PRICELIST on getooling.com
	d	l	L	D	Z			
AP0100	1	4	50	3	1	0,010	○	
AP0150	1.5	6	50	3	1	0,010	○	
AP0200	2	8	50	2	1	0,010	○	
AP0201	2	8	60	2	1	0,010	○	
AP0202	2	8	50	3	1	0,010	○	
AP0250	2.5	8	50	3	1	0,010	○	
AP0251	2.5	8	60	3	1	0,010	○	
AP0300	3	10	50	3	1	0,010	○	
AP0301	3	10	60	3	1	0,010	○	
AP0302	3	10	80	6	1	0,030	○	
AP0310	3.17	12.7	60	6.35	1	0,030	○	
AP0400	4	12	60	4	1	0,020	○	
AP0401	4	20	70	4	1	0,020	○	
AP0402	4	30	80	4	1	0,020	○	
AP0403	4	12	60	6	1	0,030	○	
AP0470	4.765	15.9	70	6.35	1	0,040	○	
AP0500	5	16	70	5	1	0,040	○	
AP0501	5	30	80	5	1	0,040	○	
AP0600	6	16	60	6	1	0,030	○	
AP0601	6	25	75	6	1	0,030	○	
AP0602	6	30	75	6	1	0,030	○	
AP0604	6	38	100	6	1	0,050	○	
AP0630	6.35	15.8	70	6.35	1	0,040	○	
AP0800	8	22	75	8	1	0,060	○	
AP0801	8	38	100	8	1	0,080	○	
AP1000	10	30	80	10	1	0,100	○	
AP1200	12	30	100	12	1	0,170	○	

Application: ☒ Recommend ☐ Suitable ☒ Not Recommend

Carbon steel, Alloy steel	Pre-hardened steel	High-hardened			Stainless steel	Copper alloy	Aluminum alloy
	~45HRC	~50HRC	~55HRC	~60HRC	~65HRC		
-	-	-	-	-	-	☐	☐

BALL NOSE - LONG NECK - 2 FLUTES

- Micro Grain Carbide
- WC=90 Co=10 HV30=1571 Rupture=3750N/mm² Grain Size=0.6 m



LNBT	Diameter	Radius of Ball Nose	Flute Length	Efficient Length	Full Length	Shank Diameter	Flutes	KG	STOCK	PRICELIST on getooling.com
	d	R	l	L1	L	D	Z			
LNBT05022 AlTiN	0.5	0.25	0.75	2	50	4	2	0,010	●	
LNBT05042 AlTiN	0.5	0.25	0.75	4	50	4	2	0,010	●	
LNBT05062 AlTiN	0.5	0.25	0.75	6	50	4	2	0,010	●	
LNBT06022 AlTiN	0.6	0.3	0.9	2	50	4	2	0,010	●	
LNBT06042 AlTiN	0.6	0.3	0.9	4	50	4	2	0,010	●	
LNBT06062 AlTiN	0.6	0.3	0.9	6	50	4	2	0,010	●	
LNBT08042 AlTiN	0.8	0.4	1.2	4	50	4	2	0,010	●	
LNBT08062 AlTiN	0.8	0.4	1.2	6	50	4	2	0,010	●	
LNBT08082 AlTiN	0.8	0.4	1.2	8	50	4	2	0,010	●	
LNBT10062 AlTiN	1	0.5	1.5	6	50	4	2	0,010	●	
LNBT10082 AlTiN	1	0.5	1.	8	50	4	2	0,010	●	
LNBT10102 AlTiN	1	0.5	1.5	10	50	4	2	0,010	●	
LNBT10122 AlTiN	1	0.5	1.5	12	50	4	2	0,010	●	
LNBT12062 AlTiN	1.2	0.6	1.8	6	50	4	2	0,010	●	
LNBT12082 AlTiN	1.2	0.6	1.8	8	50	4	2	0,010	●	
LNBT12102 AlTiN	1.2	0.6	1.8	10	50	4	2	0,010	●	
LNBT12122 AlTiN	1.2	0.6	1.8	12	50	4	2	0,010	●	
LNBT14062 AlTiN	1.4	0.7	2.1	6	50	4	2	0,010	●	
LNBT14102 AlTiN	1.4	0.7	2.1	10	50	4	2	0,010	●	
LNBT14162 AlTiN	1.4	0.7	2.1	16	50	4	2	0,010	●	
LNBT15062 AlTiN	1.5	0.75	2.3	6	50	4	2	0,010	●	
LNBT15082 AlTiN	1.5	0.75	2.3	8	50	4	2	0,010	●	
LNBT15102 AlTiN	1.5	0.75	2.3	10	50	4	2	0,010	●	
LNBT15122 AlTiN	1.5	0.75	2.3	12	50	4	2	0,010	●	
LNBT15142 AlTiN	1.5	0.75	2.3	14	50	4	2	0,010	●	
LNBT15162 AlTiN	1.5	0.75	2.3	16	50	4	2	0,010	●	
LNBT15182 AlTiN	1.5	0.75	2.3	18	50	4	2	0,010	●	
LNBT15202 AlTiN	1.5	0.75	2.3	20	50	4	2	0,010	●	
LNBT16062 AlTiN	1.6	0.8	2.4	6	50	4	2	0,010	●	
LNBT16082 AlTiN	1.6	0.8	2.4	8	50	4	2	0,010	●	

Application: ☒ Recommend ☐ Suitable ☒ Not Recommend

Carbon steel, Alloy steel	Pre-hardened steel		High-hardened			Stainless steel	Copper alloy	Aluminum alloy
	~45HRC	~50HRC	~55HRC	~60HRC	~65HRC			
☐	☒	☒	☐	-	-	☐	-	-

BALL NOSE - LONG NECK - 2 FLUTES

- Micro Grain Carbide
- WC=90 Co=10 HV30=1571 Rupture=3750N/mm² Grain Size=0.6 μm



LNBT	Radius of		Flute	Efficient	Full	Shank	Flutes	KG	STOCK	PRICELIST on getooling.com
	Diameter	Ball Nose								
	d	R	l	L1	L	D	Z			
LNBT16102 AlTiN	1.6	0.8	2.4	10	50	4	2	0,010	●	
LNBT16122 AlTiN	1.6	0.8	2.4	12	50	4	2	0,010	●	
LNBT16142 AlTiN	1.6	0.8	2.4	14	50	4	2	0,010	●	
LNBT16162 AlTiN	1.6	0.8	2.4	16	50	4	2	0,010	●	
LNBT16182 AlTiN	1.6	0.8	2.4	18	50	4	2	0,010	●	
LNBT16202 AlTiN	1.6	0.8	2.4	20	50	4	2	0,010	●	
LNBT18082 AlTiN	1.8	0.9	2.7	8	50	4	2	0,010	●	
LNBT18142 AlTiN	1.8	0.9	2.7	14	50	4	2	0,010	●	
LNBT18202 AlTiN	1.8	0.9	2.7	20	50	4	2	0,010	●	
LNBT20082 AlTiN	2	1	3	8	50	4	2	0,010	●	
LNBT20102 AlTiN	2	1	3	10	50	4	2	0,010	●	
LNBT20122 AlTiN	2	1	3	12	50	4	2	0,010	●	
LNBT20142 AlTiN	2	1	3	14	50	4	2	0,010	●	
LNBT20162 AlTiN	2	1	3	16	50	4	2	0,010	●	
LNBT20182 AlTiN	2	1	3	18	50	4	2	0,010	●	
LNBT20202 AlTiN	2	1	3	20	50	4	2	0,010	●	
LNBT25082 AlTiN	2.5	1.25	4	8	50	4	2	0,010	●	
LNBT25122 AlTiN	2.5	1.25	4	12	50	4	2	0,010	●	
LNBT25162 AlTiN	2.5	1.25	4	16	50	4	2	0,010	●	
LNBT25202 AlTiN	2.5	1.25	4	20	50	4	2	0,010	●	
LNBT30102 AlTiN	3	1.5	4.5	10	50	6	2	0,010	●	
LNBT30122 AlTiN	3	1.5	4.5	12	50	6	2	0,010	●	
LNBT30162 AlTiN	3	1.5	4.5	16	60	6	2	0,020	●	
LNBT30202 AlTiN	3	1.5	4.5	20	60	6	2	0,020	●	
LNBT30252 AlTiN	3	1.5	4.5	25	75	6	2	0,020	●	
LNBT40122 AlTiN	4	2	6	12	50	6	2	0,020	●	
LNBT40162 AlTiN	4	2	6	16	60	6	2	0,020	●	
LNBT40202 AlTiN	4	2	6	20	75	6	2	0,020	●	
LNBT40252 AlTiN	4	2	6	25	75	6	2	0,020	●	
LNBT40302 AlTiN	4	2	6	30	75	6	2	0,020	●	

Application: ☒ Recommend ☐ Suitable ☒ Not Recommend

Carbon steel, Alloy steel	Pre-hardened steel		High-hardened			Stainless steel	Copper alloy	Aluminum alloy
	~45HRC	~50HRC	~55HRC	~60HRC	~65HRC			
☐	☒	☒	☐	-	-	☐	-	-

- Disponibile - Lieferbar - On stock
- A richiesta - Auf Anfrage - On request

2024



165

MILLING

MINIMILL

MOULDMILL

MICROTOOLS
AMS

MINITOOLS

GROOVING

GE DRILLS

NICECUT

YES DRILLS

SLIM CHUCK

INSERTS

SPEED TIGER

MINIATURE BALL NOSE - 2 FLUTES

• Micro Grain Carbide
• WC=90 Co=10 HV30=1571 Rupture=3750N/mm² Grain Size=0.6 m



MIB	Diameter	Radius of Ball Nose	Flute Length	Full Length	Shank Diameter	Flutes	KG	STOCK	PRICELIST on getooling.com
	d	R	l	L	D	Z			
MIB0032 AlTiN	0.3	0.15	0.6	50	4	2	0,010	○	
MIB0042 AlTiN	0.4	0.2	0.8	50	4	2	0,010	○	
MIB0052 AlTiN	0.5	0.25	1	50	4	2	0,020	○	
MIB0062 AlTiN	0.6	0.3	1.2	50	4	2	0,020	○	
MIB0072 AlTiN	0.7	0.35	1.4	50	4	2	0,020	○	
MIB0082 AlTiN	0.8	0.4	1.6	50	4	2	0,020	○	
MIB0092 AlTiN	0.9	0.45	1.8	50	4	2	0,020	○	
MIB0102 AlTiN	1	0.5	2	50	4	2	0,020	○	
MIB0112 AlTiN	1.1	0.55	2.2	50	4	2	0,020	○	
MIB0122 AlTiN	1.2	0.6	2.4	50	4	2	0,020	○	
MIB0132 AlTiN	1.3	0.65	2.6	50	4	2	0,020	○	
MIB0142 AlTiN	1.4	0.7	2.8	50	4	2	0,020	○	
MIB0152 AlTiN	1.5	0.75	3	50	4	2	0,020	○	
MIB0162 AlTiN	1.6	0.8	3.2	50	4	2	0,020	○	
MIB0172 AlTiN	1.7	0.85	3.4	50	4	2	0,020	○	
MIB0182 AlTiN	1.8	0.9	3.6	50	4	2	0,020	○	
MIB0192 AlTiN	1.9	0.95	3.8	50	4	2	0,020	○	
MIB0202 AlTiN	2	1	4	50	4	2	0,020	○	
MIB0212 AlTiN	2.1	1.05	4.2	50	4	2	0,020	○	
MIB0222 AlTiN	2.2	1.1	4.4	50	4	2	0,020	○	
MIB0232 AlTiN	2.3	1.15	4.6	50	4	2	0,020	○	
MIB0242 AlTiN	2.4	1.2	4.8	50	4	2	0,020	○	
MIB0252 AlTiN	2.5	1.25	5	50	4	2	0,020	○	
MIB0262 AlTiN	2.6	1.3	5.2	50	4	2	0,020	○	
MIB0272 AlTiN	2.7	1.35	5.4	50	4	2	0,020	○	
MIB0282 AlTiN	2.8	1.4	5.6	50	4	2	0,020	○	
MIB0292 AlTiN	2.9	1.45	5.8	50	4	2	0,020	○	
MIB0302 AlTiN	3	1.5	6	50	4	2	0,020	○	

Application: ☒ Recommend ☐ Suitable ☒ Not Recommend

Carbon steel, Alloy steel	Pre-hardened steel	High-hardened					Stainless steel	Copper alloy	Aluminum alloy
	~45HRC	~50HRC	~55HRC	~60HRC	~65HRC				
☐	☒	☒	☒	☐	-	-	☐	-	-

BALL NOSE - 2 FLUTES

- Micro Grain Carbide
- WC=90 Co=10 HV30=1571 Rupture=3750N/mm² Grain Size=0.61Jm



SSB
MSB
SB

	Diameter	Radius of Ball Nose	Flute Length	Full Length	Shank Diameter	Flutes	KG	STOCK	PRICELIST on getooling.com
d	R	l	L	D	Z				
SSB0102 TiSiN	1	0.5	2	50	3	2	0,020	○	
MSB0102 TiSiN	1	0.5	2	50	4	2	0,020	○	
SSB0152 TiSiN	1.5	0.75	3	50	3	2	0,020	○	
MSB0152 TiSiN	1.5	0.75	3	50	4	2	0,020	○	
SSB0202 TiSiN	2	1	4	50	3	2	0,020	○	
MSB0202 TiSiN	2	1	4	50	4	2	0,020	○	
SSB0252 TiSiN	2.5	1.25	5	50	3	2	0,020	○	
MSB0252 TiSiN	2.5	1.25	5	50	4	2	0,020	○	
SSB0302 TiSiN	3	1.5	6	50	3	2	0,020	○	
MSB0302 TiSiN	3	1.5	6	50	4	2	0,020	○	
MSB0352 TiSiN	3.5	1.75	7	50	4	2	0,020	○	
MSB0402 TiSiN	4	2	8	50	4	2	0,020	○	
SB0102 TiSiN	1	0.5	2	50	6	2	0,020	●	
SB0152 TiSiN	1.5	0.75	3	50	6	2	0,020	●	
SB0202 TiSiN	2	1	4	50	6	2	0,020	●	
SB0252 TiSiN	2.5	1.25	5	50	6	2	0,020	●	
SB0302 TiSiN	3	1.5	6	50	6	2	0,020	●	
SB0352 TiSiN	3.5	1.75	7	50	6	2	0,020	●	
SB0402 TiSiN	4	2	8	50	6	2	0,020	●	
SB0452 TiSiN	4.5	2.25	9	50	6	2	0,020	●	
SB0502 TiSiN	5	2.5	10	50	6	2	0,020	●	
SB0552 TiSiN	5.5	2.75	11	50	6	2	0,020	●	
SB0602 TiSiN	6	3	12	50	6	2	0,040	●	
SB0702 TiSiN	7	3.5	14	60	8	2	0,040	●	
SB0802 TiSiN	8	4	16	60	8	2	0,080	●	
SB0902 TiSiN	9	4.5	18	75	10	2	0,080	●	
SB1002 TiSiN	10	5	20	75	10	2	0,080	●	
SB1102 TiSiN	11	5.5	22	75	12	2	0,080	●	
SB1202 TiSiN	12	6	24	75	12	2	0,100	●	
SB1402 TiSiN	14	7	28	100	16	2	0,240	●	
SB1602 TiSiN	16	8	32	100	16	2	0,240	●	
SB1802 TiSiN	18	9	36	100	20	2	0,360	●	
SB2002 TiSiN	20	10	40	100	20	2	0,390	●	

Application: ☒ Recommend ☐ Suitable ☒ Not Recommend



Carbon steel, Alloy steel	Pre-hardened steel ~45HRC	~50HRC	High-hardened ~55HRC	~60HRC	~65HRC	Stainless steel	Copper alloy	Aluminum alloy
☐	☒	☒	☐	-	-	☐	-	-

SH SUPER HIGH SPEED HIGH HARDNESS

- Ultra Micro Grain Carbide
- WC=91 Co=9 HRA=93.2 Rupture=4000N/mm² Grain Size=0.2 µm



KCR	Diameter	Corner Radius	Flute Length	Neck Length	Neck Diameter	Full Length	Shank Diameter	Flutes	KG	STOCK	PRICELIST on getooling.com
	d	R	l	l1	dn	L	D	Z			
KCR0203	2	0.3	0.8	5	1.8	60	6	4	0,020	○	
KCR0205	2	0.5	0.8	5	1.8	60	6	4	0,020	○	
KCR0307	3	0.75	1.2	7.5	2.7	60	6	4	0,020	○	
KCR0310	3	1	1.2	7.5	2.7	60	6	4	0,020	○	
KCR0405	4	0.5	1.6	10	3.6	75	6	4	0,030	○	
KCR0410	4	1	1.6	10	3.6	75	6	4	0,030	○	
KCR0510	5	1	2	12	4.5	75	6	4	0,030	○	
KCR0512	5	1.2	2	12	4.5	75	6	4	0,030	○	
KCR0610	6	1	2.5	13	5.4	100	6	4	0,040	○	
KCR0615	6	1.5	2.5	13	5.4	100	6	4	0,040	○	
KCR0810	8	1	3.5	16	7.2	100	8	4	0,080	○	
KCR0820	8	2	3.5	16	7.2	100	8	4	0,080	○	
KCR0920	9	2	4	18	8.2	100	10	4	0,120	○	
KCR1010	10	1	4	20	9	100	10	4	0,120	○	
KCR1020	10	2	4	20	9	100	10	4	0,120	○	
KCR1210	12	1	5	24	11	100	12	4	0,170	○	
KCR1220	12	2	5	24	11	100	12	4	0,170	○	
KCR1230	12	3	5	24	11	100	12	4	0,170	○	

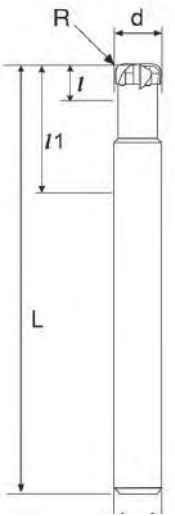

Application: ☒ Recommend ☐ Suitable ☒ Not Recommend

Carbon steel, Alloy steel	Pre-hardened steel		High-hardened			Stainless steel	Copper alloy	Aluminum alloy
	~45HRC	~50HRC	~55HRC	~60HRC	~65HRC			
☐	☐	☒	☒	☒	☒	-	-	-

BIG FOOT SUPER REMOVER

- Ultra Micro Grain Carbide
- WC=87 Co=12 HRA=92.1 Rupture=3800N/mm² Grain Size=0.4 m

400
Nano

HRC
60

30°


SH

R
±0.01

HRC ▲40	HRC ▲45	HRC ▲50	HRC ▲55	HRC ▲60	HRC ▲65												
---------	---------	---------	---------	---------	---------	--	--	--	--	--	--	--	--	--	--	--	--



BFR	Diameter		Corner Radius		Corner	Flute Length	Full Length	Shank Diameter	KG	STOCK	PRICELIST on getooling.com
	d	R	A	B							
BFR06050	6	5	0.66	3	2	7	60	6	0,020	○	
BFR06051	6	5	0.66	3	2	7	100	6	0,050	○	
BFR06060	6	6	0.66	3	1.5	7	60	6	0,020	○	
BFR06061	6	6	0.66	3	1.5	7	100	6	0,040	○	
BFR08080	8	8	0.88	4	2	9	60	8	0,040	○	
BFR08081	8	8	0.88	4	2	9	100	10	0,080	○	
BFR10100	10	10	0.9	5	3	11	75	10	0,110	○	
BFR10101	10	10	0.9	5	3	11	100	12	0,120	○	
BFR12120	12	12	1.6	6	3	13	75	12	0,120	○	
BFR12121	12	12	1.6	6	3	13	100	12	0,180	○	
BFR12150	12	15	0.91	6	3	15	75	12	0,120	○	
BFR12151	12	15	0.91	6	3	15	100	12	0,150	○	
BFR16160	16	16	1.77	8	4	18	150	16	0,350	○	
BFR16200	16	20	1.5	8	3	22	150	16	0,400	○	

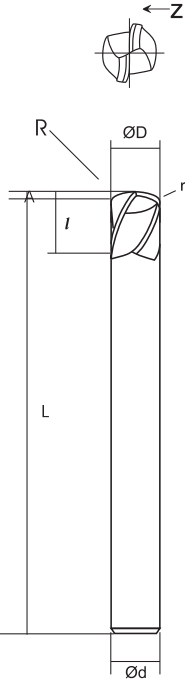

Application: ☒ Recommend ☐ Suitable ☒ Not Recommend



Carbon steel, Alloy steel	Pre-hardened steel		High-hardened			Stainless steel	Copper alloy	Aluminum alloy
	~45HRC	~50HRC	~55HRC	~60HRC	~65HRC			
☐	☐	☒	☒	☒	☒	-	-	-

SUPER HIGH HARDNESS & SUPER HIGH SPEED CUTTING BALL NOSE

- Ultra Micro Grain Carbide
- WC=91 Co=9 HRA=93.2 Rupture=4000N/mm² Grain Size=0.2µm



KTG	Diameter	Radius	Flute Length	Efficient Length	Neck Diameter	Full Length	Shank Diameter	KG	STOCK	PRICELIST on getooling.com
	d	R	l	L1	dn	L	D			
KTG0102 SH	1	0.5	1	2.5	0.96	50	6	0,030	○	
KTG0152 SH	1.5	0.75	1.5	4	1.46	50	6	0,030	○	
KTG0202 SH	2	1	2	6	1.96	50	6	0,030	○	
KTG0252 SH	2.5	1.25	2.5	7	2.46	50	6	0,030	○	
KTG0302 SH	3	1.5	3	8	2.96	50	6	0,030	○	
KTG4402 SH	4	2	4	8	3.96	50	4	0,020	○	
KTG0402 SH	4	2	4	8	3.96	50	6	0,030	○	
KTG0502 SH	5	2.5	5	12	4.96	50	6	0,030	○	
KTG0602 SH	6	3	6	13	5.96	50	6	0,030	○	
KTG0802 SH	8	4	8	16	7.9	60	8	0,050	○	
KTG1002 SH	10	5	10	20	9.9	75	10	0,090	○	
KTG1202 SH	12	6	12	24	11.9	75	12	0,120	○	

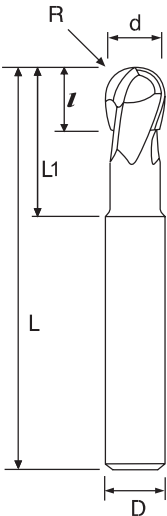


Application: ☒ Recommend ☐ Suitable ☒ Not Recommend


Carbon steel, Alloy steel	Pre-harden steel		High-hardened			Stainless steel	Copper alloy	Aluminun alloy
	~45HRC	~50HRC	~55HRC	~60HRC	~65HRC			
☐	☐	☒	☒	☒	☒	-	-	-

MULTI - FUNCTION END MILL SERIES - 2 FLUTES

Multi - function end mill series - 2 flutes

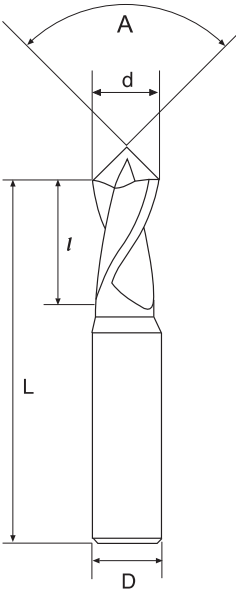

CDM	Diameter	Flute Length	Full Length	Shank Diameter	Tip Angle	Flutes	KG	STOCK	PRICELIST on getooling.com
	d	l	L	D	A	Z			
CDM060030 ALTiN	3	6	50	4	60°	2	0,020	○	
CDM090030 ALTiN	3	6	50	4	90°	2	0,020	○	
CDM120030 ALTiN	3	6	50	4	120°	2	0,080	○	
CDM060040 ALTiN	4	8	50	6	60°	2	0,020	○	
CDM090040 ALTiN	4	8	50	6	90°	2	0,040	○	
CDM120040 ALTiN	4	8	50	6	120°	2	0,080	○	
CDM060050 ALTiN	5	10	50	6	60°	2	0,020	○	
CDM090050 ALTiN	5	10	50	6	90°	2	0,050	○	
CDM120050 ALTiN	5	10	50	6	120°	2	0,160	○	
CDM060060 ALTiN	6	12	60	8	60°	2	0,020	○	
CDM090060 ALTiN	6	12	60	8	90°	2	0,040	○	
CDM120060 ALTiN	6	12	60	8	120°	2	0,150	○	
CDM060080 ALTiN	8	16	75	10	60°	2	0,020	○	
CDM090080 ALTiN	8	16	75	10	90°	2	0,040	○	
CDM120080 ALTiN	8	16	75	10	120°	2	0,140	○	
CDM060100 ALTiN	10	20	75	12	60°	2	0,020	○	
CDM090100 ALTiN	10	20	75	12	90°	2	0,040	○	
CDM120100 ALTiN	10	20	75	12	120°	2	0,150	○	
CDM060120 ALTiN	12	25	75	12	60°	2	0,020	○	
CDM090120 ALTiN	12	25	75	12	90°	2	0,090	○	
CDM120120 ALTiN	12	25	75	12	120°	2	0,140	○	
CDM060140 ALTiN	14	28	80	14	60°	2	0,020	○	
CDM090140 ALTiN	14	28	80	14	90°	2	0,080	○	
CDM120140 ALTiN	14	28	80	14	120°	2	0,150	○	
CDM060160 ALTiN	16	32	100	16	60°	2	0,020	○	
CDM090160 ALTiN	16	32	100	16	90°	2	0,090	○	
CDM120160 ALTiN	16	32	100	16	120°	2	0,140	○	
CDM060200 ALTiN	20	35	100	20	60°	2	0,020	○	
CDM090200 ALTiN	20	35	100	20	90°	2	0,080	○	
CDM120200 ALTiN	20	35	100	20	120°	2	0,140	○	

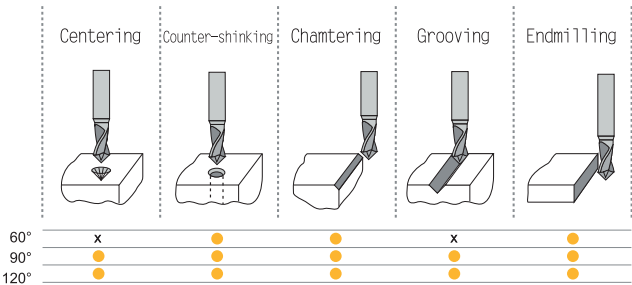

Application: ■ Recommend □ Suitable x Not Recommend

Carbon steel, Alloy steel	Pre-hardened steel ~45HRC	~50HRC	High-hardened			Stainless steel	Copper alloy	Aluminum alloy
			~55HRC	~60HRC	~65HRC			
□	■	■	□	-	-	□	-	-

ESEMPIO SET _ SATZ BEISPIEL _ SET EXAMPLE



PROFI-BOX
SET PE TiSiN

Art. SET PE 3T
TiSiN 45°

- n° 1
- n° 1
- n° 1
- n° 1

- PE0603 TiSiN
- PE0803 TiSiN
- PE1003 TiSiN
- PE1203 TiSiN

(mm)			
d	l	L	D

z

STOCK



SPECIAL
NET PRICE
PROMO

Art. SET PE 4T
TiSiN 45°

- n° 1
- n° 1
- n° 1
- n° 1

- PE0604 TiSiN
- PE0804 TiSiN
- PE1004 TiSiN
- PE1204 TiSiN

d	l	L	D
---	---	---	---

z

STOCK



SPECIAL
NET PRICE
PROMO



PROFI-BOX
SET MPE TiSiN

Art. SET MPE 3T
TiSiN 45°

- n° 10
- n° 10
- n° 10
- n° 10
- n° 10

- MPE0103 TiSiN
- MPE0153 TiSiN
- MPE0203 TiSiN
- MPE0303 TiSiN
- MPE0403 TiSiN

(mm)			
d	l	L	D

z

STOCK



SPECIAL
NET PRICE
PROMO



PROFI-BOX
SET MSB TiSiN

Art. SET MSB 2T/50
TiSiN 35°

- n° 10
- n° 10
- n° 10
- n° 10
- n° 10

- MSB0102 TiSiN
- MSB0152 TiSiN
- MSB0202 TiSiN
- MSB0302 TiSiN
- MSB0402 TiSiN

(mm)				
d	R	l	L	D

z

STOCK



SPECIAL
NET PRICE
PROMO





RICAMBI

RICAMBI	SPEED TIGER	INSERTS	SLIM CHUCK	YES DRILLS	NICECUT	GE DRILLS	GROOVING	MINITOLS	MICROTOOLS AMS	MOULDMILL	MINIMILL	MILLING
---------	-------------	---------	------------	------------	---------	-----------	----------	----------	-------------------	-----------	----------	---------

CODICE ORDINE Bestell-Nr. Order No.	PRICELIST on getooling.com	CODICE ORDINE Bestell-Nr. Order No.	PRICELIST on getooling.com	CODICE ORDINE Bestell-Nr. Order No.	PRICELIST on getooling.com
A02-20033 (M2X3,3 T06)		KP 3111 (ESAGONO 3)		US3450	
A02-35082 (M3,5X8,2 T15)		KVR 16		US4111	
A02-60120 (M6X12 T25)		M6-16 (M6X16,2 5)		US4221	
A06-50088 (M5X8,8 T20)		M8X5QC (M8X1X5 3)		US5511	
A13-25042 (M2,5X4,2 T08)		MP1111		US6522	
A13-25050 (M2,5X5 T08)		MP1221		US6522E	
A13-30073 (M3X7,3 T08)		MP1321		US-3R	
AKE 12,4		MP3111		US-3L	
AS 0043 (M5X8,5 2,5)		P1		USR-3E	
AS 0044 (M6X10 3)		RE0 (M3X5 1,5)		V04-T0600	
BFTX01604N (M1,6X4,2 T06)		RE1 (M3X6 1,5)		V04-T0800	
BFTX0204N (M2X4,8 T06)		RE2 (M4X8 2)		V04-T1500	
BFTX02206N (M2,2X5,6 T07)		RE3 (M5X8 2,5)		V04-T2000	
BFTX02506N (M2,5X6,5 T08)		RE4 (M5X12 2,5)		V04-T2500	
BFTX03584 (M3,5X8,6 T15)		RE5 (M8X12 4)		V1005 (M5X11 T20)	
BFTX0511N (M5X11,5 T20)		RE6 (M8X16 4)		V1006 (M6X16,2 T20)	
BFTX0615N (M6X15 T25)		RE7 (M8X20 4)		V11 (M3X8,2 T09)	
BL0 (M4X8,2 T15)		RE8 (M8X20 4)		V26 (M2,5X5,5 T07)	
BL1 (M5X10 T20)		RE9 (M3X4 1,5)		V27 (M2,5X6,5 T07)	
BL2 (M6X12,5 T25)		RE10 (M3X5 1,5)		V36 (M3,5X10 T15)	
BL3 (M8X16 5)		RE11 (M2X4 0,89)		V41 (M4X11,7 T15)	
BL4 (M8X20 5)		RP1111		VF4 (M4X8 T08)	
BL5 (M10X25 6)		RP1111E		VFS088 (M8X30)	
BL6 (M10X30 6)		RP1221		VT16 (M1,6X3,2 T06)	
BL7 (M12X35 8)		RP1321		VT1604 (M1,6X3,5 T05)	
BL8 (M12X40 8)		RP3112		VT18 (M1,8X3,7 T06)	
BL9 (M2,5X6,5 T07)		RP3112E		VT18 B (M1,8X3 T06)	
BL10 (M3X8,2 T09)		S12 NEW		VT20 (M2X4,8 T06)	
BL11 (M2X5,5 T06)		S25 (M6X5,5 3)		VT20 B (M2X3,2 T06)	
BT05 (TORX 05)		S35 (M6X48,7 3)		VT22 (M2,2X4,8 T07)	
BT06 (TORX 06)		SP1111 (M8X18,2 3)		VT22 B (M2,2X4,5 T06)	
BT07 (TORX 07)		SP1111E		VT24 (M2X3,8 T06)	
BT08 (TORX 08)		SP1114 (M8X16,8 3)		VT25 (M2,5X5,5 T08)	
BT09 (TORX 09)		SP1221 (M8X20,5 3)		VT25 B (M2,5X5 T08)	
BT15 (TORX 15)		SP1321 (M10X26,5 4)		VT25 FLEXIMILL (M2,5X5,5 T08)	
BT20 (TORX 20)		SP3111 (M6X16,7 2,5)		VT2530 (M2,5X4,5 T07)	
BT25 (TORX 25)		SP3111E		VT2565 (M2,5X6,5 T08)	
BT25 IP (TORX PLUS 25)		SS1111 (M3,5X11 T15)		VT25 830 (M2,5X5,5 T08)	
CBH 08-10-12-16		SS1114 (M3,5X7,2 T15)		VT30 745 (M3X7,4 T09)	
CVB35 (M3,5X4 T15)		SS1221 (M4,5X12 T15)		VT30 G (M3X7 T08)	
CVB45		SS1751 (M2,5X6 T08)		VT35 (M3,5X8,6 T15)	
CVB55 (M8X21 IP25)		SS8831 (M3X7,3 T08)		VT35 S (M3,5X8,6 T15)	
CVB55 L (M8X21 4)		T16 NEW		VT3511 (M3,5X11 T15)	
E1		UP1111		VT40 (M4X9 T15)	
G1 (M5X6 2,5)		UP1111E		VT4010 (M4X11,2 T15)	
GBS1111 (M5X8 3,5)		UP1221		VT40 710 (M4X10,5 T15)	
GBS1111E		UP1321		VT40 735 (M4X11,7 T15)	
GBS1221 (M6X9 4,5)		UP2011E		VT40 835 (M4X11,7 T15)	
GBS1221E		UP2421		VT40 B (M4X8,3 T15)	
GBS-3E		UP2421E		VT40QC (M4X0,7 3)	
GESL		UP5112		VT40-3E	
VT40 SL (M4X5 T15)		UP5321		VT40 R (M4X10 T15)	
VT50 BHM (M5X12 3)		UP5421		VT40 S (M4X11,5 T20)	
GS1		UP6211		VT45 (M4,5X10,5 T20)	
HP1111		UP71011		VT50 (M5X11 T20)	
HP1111E		UP71011E		VT.FB.030 (M8X30,5)	
HP1221		UP71111		VT.FB.035 (M10X31)	
HP1321		US1111		VT.FB.STANDARD (M12X30 8)	
HP2011E		US1111E		VTX 3503 (M3,5X3,3 T09)	
HP2421		US1221		VTX 3504 (M3,5X4,2 T09)	
HP2421E		US1221E		VTX 405 (M4X5,2 T15)	
HP4751		US2311		VTX 408 (M4X7,8 T15)	
K25		US2311E			
KP 1111 (ESAGONO 2,5)		US3431			

[illegible]






PARAMETRI INSERTI

PARAMETRI INSERTI	RICAMBI	SPEED TIGER	INSERTS	SLIM CHUCK	YES DRILLS	NICECUT	GE DRILLS	GROOVING	MINITOLS	MICROTOOLS AMS	MOULDMILL	MINIMILL	MILLING
----------------------	---------	-------------	---------	------------	------------	---------	-----------	----------	----------	-------------------	-----------	----------	---------

PARAMETRI INSERTI _ SCHNITTDATEN _ CUTTING CONDITION

MILLING		P	M	K	N	S	H
	APMX 060210 MPH	K400	P25-P40	M20-M40	K20-K40		
	fz	0,2-0,7	0,2-0,7	0,2-0,7			
	ap	0,2-0,6	0,2-0,6	0,2-0,6			
	VC	110-200	90-160	120-230			
	APKT 060204 PDTR-K	K400	P25-P40	M20-M40	K20-K40		
	fz	0,05-0,25	0,05-0,25	0,05-0,25			
	ap	0,5-2,5	0,5-2,5	0,5-2,5			
	VC	110-200	90-160	120-230			
	APKT 060204 PDER-S	K300	P25-P40	M20-M40	K20-K40		
	fz	0,05-0,25	0,05-0,25	0,05-0,25			
	ap	0,5-2,5	0,5-2,5	0,5-2,5			
	VC	110-200	90-160	120-230			
	APKT 060204 PDER-S	P200	P10-P20		K10-K20		
	fz	0,05-0,25		0,05-0,25			
	ap	0,5-2,5		0,5-2,5			
	VC	180-280		160-270			
	APKT 060204 PDER-S	P300	P30-P40	M30-M40			
	fz	0,05-0,25	0,05-0,25				
	ap	0,05-2,5	0,05-2,5				
	VC	110-180	90-160				
	APKT 060220 PDER-S	P200	P25-P40	M20-M40	K20-K40		
	fz	0,05-0,25	0,05-0,25	0,05-0,25			
	ap	0,5-2,5	0,5-2,5	0,5-2,5			
	VC	110-200	90-160	120-230			
	APKT 060220 PDER-S	P300	P10-P20		K10-K20		
	fz	0,05-0,25		0,05-0,25			
	ap	0,5-2,5		0,5-2,5			
	VC	180-280		160-270			
	APKT 060220 PDER-S	K300	P30-P40	M30-M40			
	fz	0,05-0,25	0,05-0,25				
	ap	0,05-2,5	0,05-2,5				
	VC	110-180	90-160				
	APKT 1003 PDR-M	K400	P25-P40	M20-M40	K20-K40		
	fz	0,10-0,30	0,10-0,30	0,10-0,30			
	ap	0,1-4	0,1-4	0,1-4			
	VC	100-170	70-130	120-230			
	APKT 1003 PDER-S	K300	P25-P40	M20-M40	K20-K40		
	fz	0,10-0,30	0,10-0,30	0,10-0,30			
	ap	0,1-4	0,1-4	0,1-4			
	VC	100-170	70-130	120-230			
	APKT 1003 PDER-S	P200	P10-P20		K10-K20		
	fz	0,05-0,30		0,05-0,30			
	ap	0,1-4		0,1-4			
	VC	180-280		160-270			
	APKT 1003 PDER-S	P300	P30-P40	M30-M40			
	fz	0,05-0,25	0,05-0,25				
	ap	0,1-4	0,1-4				
	VC	110-120	90-160				
	APKT 1003 PDFR-R 04 ALU	K15			K10-K15		
	fz				0,10-0,40		
	ap				0,1-0,7		
	VC				200-700		
	APKT 1604 PDR-M	K400	P25-P40	M20-M40	K20-K40		
	fz	0,10-0,30	0,10-0,30	0,10-0,30			
	ap	0,1-7	0,1-7	0,1-7			
	VC	100-170	70-130	120-230			

PARAMETRI INSERTI _ SCHNITTDATEN _ CUTTING CONDITION

MILLING		P	M	K	N	S	H
APKT 1604 PDER-S 	K300	P25-P40	M20-M40	K20-K40			
	fz	0,10-0,30	0,10-0,30	0,10-0,30			
	ap	0,1-7	0,1-7	0,1-7			
	VC	100-170	70-130	120-230			
APKT 1604 PDER-S 	P200	P10-P20		K10-K20			
	fz	0,05-0,20		0,05-0,20			
	ap	0,1-7		0,1-7			
	VC	180-280		160-270			
APKT 1604 PDER-S 	P300	P30-P40	M30-M40				
	fz	0,05-0,25	0,05-0,25				
	ap	0,1-7	0,1-7				
	VC	110-120	90-160				
APKT 1604 PDFR-R04 ALU 	K15				K10-K15		
	fz				0,10-0,40		
	ap				0,1-11,2		
	VC				200-700		
APKT 1604 PDFR-R08 ALU 	K15				K10-K15		
	fz				0,10-0,40		
	ap				0,1-11,2		
	VC				200-700		
APPT 100308 PDSR-MM 	K400	P25-P40	M20-M40	K20-K40			
	fz	0,10-0,30	0,10-0,30	0,10-0,30			
	ap	0,1-4	0,1-4	0,1-4			
	VC	100-170	70-130	120-230			
APPT 160408 PDSR-MM 	K400	P25-P40	M20-M40	K20-K40			
	fz	0,10-0,30	0,10-0,30	0,10-0,30			
	ap	0,1-7	0,1-7	0,1-7			
	VC	100-170	70-130	120-230			
APHX 1003 FR-ALU 	K15				K10-K15		
	fz				0,10-0,20		
	ap				0,1-4		
	VC				200-700		
APHX 1604 FR-ALU 	K15				K10-K15		
	fz				0,10-0,20		
	ap				0,1-8		
	VC				200-700		
APHX 1604 PDR-ALU 	K15				K10-K15		
	fz				0,10-0,20		
	ap				0,1-8		
	VC				200-700		
APHT 100304 	P25	P25					
	fz	0,07-0,15					
	ap	0,1-4					
	VC	70-200					
APHT 100304 	TIN	P20-P40	M20-M40				
	fz	0,07-0,18	0,07-0,18				
	ap	0,1-4	0,1-4				
	VC	120-250	80-200				
APHT 100304 	TIALN	P20-P25	M20-M35	K20-K30			
	fz	0,07-0,20	0,07-0,20	0,07-0,20			
	ap	0,5-4	0,5-4	0,5-4			
	VC	110-220	70-130	120-230			
APHT 1604 PDR 	P25	P25					
	fz	0,10-0,18					
	ap	0,1-7					
	VC	70-200					

MILLING		P	M	K	N	S	H
APHT 1604 PDR 	TIN	P20-P40	M20-M40				
	fz	0,10-0,20	0,08-0,18				
	ap	0,1-7	0,1-7				
	VC	110-220	70-130				
APHT 1604 PDR 	TIALN	P20-P25	M20-M35	K20-K30			
	fz	0,05-0,20	0,05-0,20	0,05-0,20			
	ap	0,5-7	0,5-7	0,5-7			
	VC	120-280	80-200	120-230			
CCMT 0602 02/04 	K400	P10-P30	M10-M25	K10-K20			
	fz	0,07-0,17	0,06-0,14	0,06-0,15			
	ap	0,3-1,8	0,3-1,4	0,3-1,8			
	VC	120-250	80-220	120-230			
CCMT 09T3 04/08 	K400	P10-P30	M10-M25	K10-K20			
	fz	0,09-0,20	0,08-0,26	0,08-0,20			
	ap	0,3-2,5	0,3-2	0,3-2,5			
	VC	120-250	80-220	120-230			
CCMT 1204 04/08 	K400	P10-P30	M10-M25	K10-K20			
	fz	0,18-0,45	0,18-0,35	0,15-0,50			
	ap	0,5-4	0,5-4	0,5-5			
	VC	120-250	80-220	120-230			
CPMT 05T104 	K300	P15-P30	M20-M35	K15-K30			
	fz	0,15-0,4	0,15-0,4	0,15-0,4			
	ap	0,1-3,5	0,1-3,5	0,1-3,5			
	VC	130-220	100-160	120-180			
CPMT 05T1 02/04 EN-PS 	P200	P10-P20		K10-K20			
	fz	0,15-0,4		0,15-0,4			
	ap	0,1-3,5		0,1-3,5			
	VC	150-250		150-230			
CPMT 05T1 02/04 EN-PM1 	K400	P20-P35	M15-M30	K15-K25			
	fz	0,15-0,4	0,15-0,4	0,15-0,4			
	ap	0,1-3,5	0,1-3,5	0,1-3,5			
	VC	130-220	100-160	120-180			
LNEX 1006 	K15				K10-K20		
	fz				0,05-0,20		
	ap				0,1-4		
	VC				250-400		
LNEX 1510 	K15				K10-K20		
	fz				0,05-0,20		
	ap				0,1-6		
	VC				250-400		
LNKX 1006 	K400	P25-P40	M20-M40	K20-K40			
	fz	0,10-0,30	0,10-0,30	0,10-0,30			
	ap	0,1-4	0,1-4	0,1-4			
	VC	110-200	90-160	120-230			
LNKX 1510 	K400	P25-P40	M20-M40	K20-K40			
	fz	0,10-0,30	0,10-0,30	0,10-0,30			
	ap	0,1-6	0,1-6	0,1-6			
	VC	110-220	90-160	120-200			
LNMX 1006 	K300	P25-P40	M20-M40	K20-K40			
	fz	0,10-0,30	0,10-0,30	0,10-0,30			
	ap	0,1-4	0,1-4	0,1-4			
	VC	110-200	90-160	120-230			
LNMX 1006 	P200	P10-P20		K10-K20			
	fz	0,05-0,20		0,10-0,25			
	ap	0,1-4		0,1-4			
	VC	100-220		120-220			

PARAMETRI INSERTI _ SCHNITTDATEN _ CUTTING CONDITION

MILLING		P	M	K	N	S	H
LNMX 1006 	P300	P30-P40	M30-M40				
	fz	0,05-0,25	0,05-0,20				
	ap	0,1-4	0,1-4				
	VC	100-170	60-130				
LNMX 1510 	K300	P25-P40	M20-M40	K20-K40			
	fz	0,10-0,30	0,10-0,30	0,10-0,30			
	ap	0,1-6	0,1-6	0,1-6			
	VC	110-220	90-160	120-200			
LNMX 1510 	P200	P10-P20		K10-K20			
	fz	0,05-0,20		0,05-0,25			
	ap	0,1-6		0,1-6			
	VC	110-220		110-220			
LNMX 1510 	P300	P30-P40	M30-M40				
	fz	0,08-0,25	0,08-0,25				
	ap	0,1-6	0,1-6				
	VC	100-170	60-130				
ONMU 1205 ANN 	K300	P25-P40	M20-M40	K20-K40			
	fz	0,05-0,25	0,05-0,25	0,05-0,25			
	ap	0,5-2,5	0,5-2,5	0,5-2,5			
	VC	110-220	90-160	120-200			
ONMU 1205 ANN 	P200	P10-P20		K10-K20			
	fz	0,05-0,25		0,05-0,25			
	ap	0,5-2,5		0,5-2,5			
	VC	180-280		160-270			
ONMU 1205 ANN 	P300	P30-P40	M30-M40				
	fz	0,05-0,25	0,05-0,25				
	ap	0,5-2,5	0,5-2,5				
	VC	110-190	90-170				
RDHT 0501 MOF ALU 	K15				K05-K10		
	fz				0,2-1		
	ap				0,5-2		
	VC				100-350		
RDKW 0501 MOS-MP RDKW 0702 MOS-MP 	K400	P15-P35	M30-M40	K10-K30			
	fz	0,11-0,22	0,08-0,18	0,11-0,22			
	ap	0,3-3	0,3-3	0,3-3			
	VC	180-300	100-150	220-300			
RDHT 0702 MOF ALU 	K15				K05-K10		
	fz				0,2-1		
	ap				0,5-3		
	VC				100-350		
RDHT 1003 MOF ALU 	K15				K05-K10		
	fz				0,2-1		
	ap				1-3,5		
	VC				100-350		
RDKW 1003 MOS-MP RDKW 12T3 MOS-MP 	K400	P15-P35	M30-M40	K10-K30			
	fz	0,11-0,22	0,08-0,18	0,11-0,22			
	ap	1-6	1-6	1-6			
	VC	180-300	100-150	220-300			
RDHT 12T3 MOF ALU 	K15				K05-K10		
	fz				0,2-1		
	ap				1-4		
	VC				100-350		

PARAMETRI INSERTI _ SCHNITTDATEN _ CUTTING CONDITION

MILLING		P	M	K	N	S	H
	RDHT 1604 MOF ALU	K15			K05-K10		
	fz				0,2-1		
	ap				1-5		
	VC				100-350		
	RDKW 1604MOS-MP	K400	P15-P35	M30-M40	K10-K30		
	fz	0,11-0,22	0,08-0,18	0,11-0,22			
	ap	1-8	1-8	1-8			
	VC	180-300	100-150	220-300			
	SCMT 060204	K400	P15-P30	M20-M35	K15-K30		
	fz	0,05-2	0,05-2	0,05-2			
	ap	0,1-2	0,1-2	0,1-2			
	VC	100-240	130-220	120-200			
	SCMT 060204	K400	P15-P30	M20-M35	K15-K30		
	f	0,05-2	0,05-2	0,05-2			
	--	--	--	--			
	VC	100-240	130-220	120-200			
	SCMT 09T308	K400	P10-P30	M10-M25	K10-K20		
	fz	0,18-0,45	0,20-0,40	0,15-0,50			
	ap	0,5-3,2	0,5-3,2	0,5-4			
	VC	120-250	80-220	120-230			
	SCMT 120408	K400	P10-P30	M10-M25	K10-K20		
	fz	0,13-0,30	0,20-0,40	0,15-0,50			
	ap	1-5	1-5	1-5			
	VC	120-250	110-170	120-230			
	SDMT 1205 PDR.69	P25	P25				
	fz	0,07-0,20					
	ap	0,1-8,8					
	VC	70-200					
	SDMT 1205 PDR.69	TIN	P20-P40	M20-M40			
	fz	0,10-0,25	0,07-0,20				
	ap	0,1-8,8	0,1-5,3				
	VC	120-280	80-200				
	SDMT 1205 PDR.69	TIALN	P20-P35	M20-M35	K20-K30		
	fz	0,10-0,30	0,10-0,30	0,10-0,30			
	ap	1-5	1-5	1-5			
	VC	110-220	70-130	120-230			
	SEEX 12T408 TiN	TiN	P25-P40	M20-M40	K20-K40		
	fz	0,08-0,15	0,08-0,15	0,08-0,15			
	ap	0,5-2,5	0,5-2,5	0,5-2,5			
	VC	80-150	80-150	80-150			
	SEHT 13T3	K300	P25-P40	M20-M40	K20-K40		
	fz	0,10-0,30	0,05-0,25	0,10-0,30			
	ap	0,5-5	0,5-5	0,5-5			
	VC	110-220	90-160	120-200			
	SEHT 13T3	P200	P25-P40		K10-K20		
	fz	0,08-0,30			0,05-0,30		
	ap	0,1-5			0,1-5		
	VC	170-250			160-260		
	SEHT 13T3	P300	P30-P40	M30-M40			
	fz	0,05-0,30	0,01-0,30				
	ap	0,5-5	0,1-5				
	VC	110-190	80-150				
	SEHX 13T03 ALU	K15			K10-K20		
	fz				0,10-0,30		
	ap				0,1-3		
	VC				200-350		

PARAMETRI INSERTI _ SCHNITTDATEN _ CUTTING CONDITION



MILLING		P	M	K	N	S	H
	SEHX 1204 ALU	K15			K10-K20		
	fz				0,10-0,30		
	ap				0,1-3		
	VC				200-350		
	SEKR 1203 AFTN	K400	P15-P40	M15-M35	K10-K50		
	fz	0,15-0,36	0,12-0,26	0,15-0,41			
	ap	0,5-5	0,5-5	0,5-7			
	VC	130-240	70-170	100-200			
	SDKT 1204 SEKT 1204 AFTN	K400	P25-P40	M20-M40	K20-K40		
	fz	0,10-0,16	0,10-0,13	0,10-0,15			
	ap	0,5-5	0,5-5	0,5-5			
	VC	130-240	70-170	100-200			
	SNEX 1206 ANN MA ALU	K15			K10-K20		
	fz				0,10-0,30		
	ap				0,1-3		
	VC				200-350		
	SNHX 1102/03 T	P25	P25				
	fz	0,05-0,11					
	ap	0,1-11					
	VC	70-90					
	SNHX 1102/03 T	TIN	P20-P40	M20-M40			
	fz	0,06-0,15	0,05-0,1				
	ap	0,1-11	0,1-11				
	VC	140-160	90-120				
	SNHX 1203/05 T	P25	P25				
	fz	0,05-0,11					
	ap	0,1-12					
	VC	70-90					
	SNHX 1203/05 T	TIN	P20-P40	M20-M40			
	fz	0,06-0,15	0,05-0,1				
	ap	0,1-12	0,1-12				
	VC	140-160	90-120				
	SNHX 1102/03 T SNHX 1203/05 T	TIALN	P25-P40	M20-M40	K20-K40		
	fz	0,08-0,15	0,08-0,15	0,08-0,15			
	ap	--	--	--			
	VC	120-200	70-130	130-210			
	SNHX 1102/03 ALU SNHX 1203/05 ALU	K15			K10-K15		
	fz				0,08-0,15		
	ap				--		
	VC				200-500		
	SNMU 1206 ANER	K300	P25-P40	M20-M40	K20-K40		
	fz	0,05-0,25	0,05-0,25	0,05-0,25			
	ap	0,5-5	0,5-5	0,5-5			
	VC	110-220	90-160	120-200			
	SNMU 1206 ANER	P200	P10-P20		K10-K20		
	fz	0,05-0,25		0,05-0,25			
	ap	0,5-5		0,5-5			
	VC	190-290		200-300			
	SNMU 1206 ANER	P300	P30-P40	M30-M40			
	fz	0,05-0,25	0,05-0,25				
	ap	0,5-5	0,5-5				
	VC	110-190	90-170				

PARAMETRI INSERTI _ SCHNITTDATEN _ CUTTING CONDITION

MILLING		P	M	K	N	S	H
	SNMX 1206 ANN1	K300	P25-P40	M20-M40	K20-K40		
	fz	0,10-0,30	0,05-0,25	0,10-0,30			
	ap	0,5-5	0,5-5	0,5-5			
	VC	110-220	90-160	120-200			
	SNMX 1206 ANN1	P200	P25-P40	K20-K40			
	fz	0,05-0,25		0,05-0,20			
	ap	0,5-5		0,5-5			
	VC	180-280		160-270			
	SNMX 1206 ANN1	P300	P30-P40	M20-M40			
	fz	0,05-0,25	0,05-0,25				
	ap	0,5-5	0,5-5				
	VC	110-190	70-170				
	SNKX 1206 ANN1	K400	P25-P40	M20-M40	K20-K40		
	fz	0,08-0,12	0,06-0,2	0,12-0,35			
	ap	0,12-6	0,12-6	0,12-6			
	VC	110-200	70-150	120-200			
	SPGT 060304 ALU	K15			K10-K15		
	fz				0,10-0,20		
	ap				0,5-2,0		
	VC				200-700		
	SPGT 09T308 ALU	K15			K10-K15		
	fz				0,10-0,20		
	ap				0,5-2,0		
	VC				200-700		
	SPGT 120408 ALU	K15			K10-K15		
	fz				0,10-0,20		
	ap				0,5-5,0		
	VC				200-700		
	SPMT 060304	K400	P15-P40	M15-M35	K10-K50		
	fz	0,05-0,10	0,05-0,08	0,05-0,12			
	ap	0,3-3	0,3-3	0,3-3			
	VC	130-240	70-170	110-220			
	SPMT 09T308	K400	P15-P40	M15-M35	K10-K50		
	fz	0,08-0,20	0,08-0,20	0,05-0,20			
	ap	0,5-4	0,5-4	0,5-4			
	VC	130-240	70-170	110-220			
	SPMT 120408	K400	P15-P40	M15-M35	K10-K50		
	fz	0,08-0,20	0,08-0,20	0,11-0,25			
	ap	0,5-6	0,5-6	0,5-6			
	VC	130-240	70-170	110-220			
	TCGX 163504	K400	P10-P30	M10-M25	K10-K20		
	fz	0,08-0,15	0,08-0,15	0,08-0,15			
	ap	1-7,5	1-7,5	1-7,5			
	VC	30-70	30-50	70-90			
	TCMT 080204	K400	P10-P30	M10-M25	K10-K20		
	fz	0,03-0,15	0,03-0,15	0,03-0,15			
	ap	0,1-1,0	0,1-1,0	0,1-1,0			
	VC	80-150	60-130	100-160			
	TCMT 1102 02/04	K400	P10-P30	M10-M25	K10-K20		
	fz	0,08-0,17	0,06-0,16	0,06-0,15			
	ap	0,3-1,8	0,3-1,4	0,3-1,8			
	VC	100-200	80-170	120-230			
	TCMT 16T3 04/08	K400	P10-P30	M10-M25	K10-K20		
	fz	0,10-0,20	0,08-0,16	0,08-0,18			
	ap	0,3-2,5	0,3-2	0,3-2,5			
	VC	120-250	80-170	120-230			

PARAMETRI INSERTI _ SCHNITTDATEN _ CUTTING CONDITION


MILLING		P	M	K	N	S	H
	TCMX 16T3/08 ZR	TIN/TiALN	P25-P40	M20-M40	K20-K40		
	fz	0,02-0,04	0,02-0,04	0,02-0,04			
	ap	0,5-1,5	0,5-1,5	0,5-1,5			
	VC	30-70	30-50	50-90			
	WNEU 040304/08	K300	P25-P40	M20-M40	K20-K40		
	fz	0,10-0,30	0,10-0,30	0,10-0,30			
	ap	0,5-3,5	0,5-3,5	0,5-3,5			
	VC	110-200	50-120	120-200			
	WNEU 040304/08	P200	P10-P20	K10-K20			
	fz	0,10-0,30		0,10-0,30			
	ap	0,5-3,5		0,5-3,5			
	VC	110-220		110-220			
	WNEU 040304/08	P300	P25-P40	M30-M40			
	fz	0,10-0,30	0,10-0,30				
	ap	0,5-3,5	0,5-3,5				
	VC	110-200	60-130				
	WNEU 080608/12	K300	P25-P40	M20-M40	K20-K40		
	fz	0,10-0,30	0,10-0,30	0,10-0,30			
	ap	0,5-6	0,5-6	0,5-6			
	VC	110-200	50-120	120-200			
	WNEU 080608/12	P200	P10-P20	K10-K20			
	fz	0,10-0,30		0,10-0,30			
	ap	0,5-6		0,5-6			
	VC	110-220		110-220			
	WNEU 080608/12	P300	P30-P40	M30-M40			
	fz	0,10-0,30	0,10-0,30				
	ap	0,5-6	0,5-6				
	VC	100-170	60-130				
	WNEU 080608	K400	P10-P30	K15-K25			H10-H35
	fz	0,10-0,30		0,10-0,30			0,10-0,30
	ap	0,5-6		0,5-6			0,5-6
	VC	110-220		120-200			120-200
	WNMU 080608-MB	K400	P25-P40	M20-M40	K20-K40		
	fz	0,10-0,30	0,10-0,30	0,10-0,30			
	ap	0,5-6	0,5-6	0,5-6			
	VC	110-200	50-120	120-200			
	WNEX 080608 ALU	K15			K10-K20		
	fz				0,10-0,30		
	ap				0,5-6		
	VC				300-500		
	XNEX 080610-HF	K400	M20-M40				
	fz		0,40-1,00				
	ap		0,30				
	VC		114-171				

TURNING		P	M	K	N	S	H
CCGT 030102 - FN 	K400	P20-P35	M10-M25	K10-K20			
	f	0,03-0,15	0,03-0,15	0,03-0,15			
	--	--	--	--			
	VC	100-190	70-90	120-200			
CCGT 0602 02/04 ALU CCGT 09T3 02/04/08 ALU CCGT 1204 02/04/08 ALU 	K15				K10-K20		
	f				0,05-0,20		
	--				--		
	VC				160-250		
CCMT 0602 02/04 	K400	P10-P30	M10-M25	K10-K20			
	f	0,07-0,17	0,06-0,14	0,06-0,15			
	--	--	--	--			
	VC	120-250	80-220	120-230			
CCMT 09T3 04/08 	K400	P10-P30	M10-M25	K10-K20			
	f	0,09-0,20	0,08-0,26	0,08-0,20			
	--	--	--	--			
	VC	120-250	80-220	120-230			
CCMT 1204 04/08 	K400	P10-P30	M10-M25	K10-K20			
	f	0,18-0,45	0,18-0,35	0,15-0,50			
	--	--	--	--			
	VC	120-250	80-220	120-230			
CPGT 05T1 02-04 CDGT 0401 01/02/04 N-ALU 	K15				K10-K15		
	f				0,03-0,12		
	--				--		
	VC				160-250		
CDGT 0401 02/04 FN 	K400	P20-P35	M15-M30	K15-K25			
	f	0,03-0,15	0,03-0,15	0,03-0,15			
	--	--	--	--			
	VC	110-190	70-90	120-200			
DCGT 04T002 FN-ALU 	K15				K10-K15		
	f				0,02-0,15		
	--				--		
	VC				160-250		
DCGT 04T002 EN-PM1 	K400	P20-P35	M15-M30	K15-K25			
	f	0,05-0,20	0,05-0,20	0,05-0,20			
	--	--	--	--			
	VC	100-190	70-90	120-200			
DCGT 0702 02/04 	K15				K10-K20		
	f				0,08-0,20		
	--				--		
	VC				160-250		
DCGT 11T302 04/08 	K15				K10-K20		
	f				0,10-0,25		
	--				--		
	VC				160-250		
DCMT 0702 02/04 	K400	P10-P30	M10-M25	K10-K20			
	f	0,07-0,17	0,06-0,14	0,06-0,15			
	--	--	--	--			
	VC	120-250	80-220	120-230			
DCMT 11T3 02/04/08 	K400	P10-P30	M10-M25	K10-K20			
	f	0,18-0,45	0,18-0,35	0,15-0,55			
	--	--	--	--			
	VC	120-250	80-220	120-230			
SCGT 09T3 04/08 ALU SCGT 120408 ALU 	K15				K10-K20		
	f				0,10-0,25		
	--				--		
	VC				160-250		

PARAMETRI INSERTI _ SCHNITTDATEN _ CUTTING CONDITION

TURNING		P	M	K	N	S	H
	SCMT 09T308	K400	P10-P30	M10-M25	K10-K20		
	f	0,18-0,45	0,20-0,40	0,15-0,50			
	--	--	--	--			
	VC	120-250	80-220	120-230			
	SCMT 120408	RK400	P10-P30	M10-M25	K10-K20		
	f	0,13-0,30	0,20-0,40	0,15-0,50			
	--	--	--	--			
	VC	120-250	110-170	120-230			
	TCGT 1102 02/04 TCGT 16T3 04/08	K15			K10-K20		
	f				0,10-0,25		
	--				--		
	VC				160-250		
	TCMT 1102 02/04	K400	P10-P30	M10-M25	K10-K20		
	f	0,08-0,17	0,06-0,16	0,06-0,15			
	--	--	--	--			
	VC	120-250	80-220	120-230			
	TCMT 16T3 04/08	K400	P10-P30	M10-M25	K10-K20		
	f	0,10-0,20	0,08-0,16	0,08-0,18			
	--	--	--	--			
	VC	120-250	80-220	120-210			
	VBMT 110304	K400	P10-P30	M10-M25	K10-K20		
	f	0,07-0,17	0,06-0,14	0,06-0,15			
	--	--	--	--			
	VC	120-250	80-220	120-230			
	VBMT 1604 04/08	K400	P10-P30	M10-M25	K10-K20		
	f	0,16-0,30	0,16-0,30	0,14-0,40			
	--	--	--	--			
	VC	120-250	80-220	120-230			
	VCGT 0501 02 FN-ALU VCGT 0702 01/02/04 FN-ALU	K15			K10-K15		
	f				0,02-0,15		
	--				--		
	VC				160-250		
	VCGT 0501 01/02 VCGT 0702 02/04	K400	P20-P35	M15-M30	K15-K25		
	f	0,05-0,20	0,05-0,20	0,05-0,20			
	--	--	--	--			
	VC	100-190	70-90	120-200			
	VCGT 1103 02/04/08 VCGT 1604 04/08	K15			K10-K20		
	f				0,10-0,25		
	--				--		
	VC				160-250		
	VCMT 110304	K400	P20-P35	M15-M30	K15-K25		
	f	0,05-0,20	0,05-0,20	0,05-0,20			
	--	--	--	--			
	VC	100-190	70-90	120-200			
	VCMT 1604 04/08	K400	P10-P30	M10-M25	K10-K20		
	f	0,09-0,25	0,08-0,20	0,08-0,25			
	--	--	--	--			
	VC	120-200	80-100	120-200			
	WCGT 0201 01/02 FN-ALU	K15			K10-K30		
	f				0,03-0,15		
	--				--		
	VC				160-250		
	WCMT 0201 02/04	X55	P10-P30	M20-M40	K10-K20		
	f	0,05-0,20	0,05-0,20	0,05-0,20			
	--	--	--	--			
	VC	100-190	70-90	120-200			

PARAMETRI INSERTI _ SCHNITTDATEN _ CUTTING CONDITION

DRILLING		P	M	K	N	S	H
	SEEX 12T408	TIN	P25-P40	M20-M40	K20-K40		
	f	0,02-0,05	0,02-0,05	0,02-0,05			
	--	--	--	--			
	VC	40-80	40-50	40-80			
	XPMT 042004 ALU XPMT 052804 ALU XPMT 063306 ALU XPMT 074006 ALU XPMT 094508 ALU XPMT 125812 ALU XPMT 156812 ALU	K15			K10-K20		
	fz				0,01-0,15		
	ap				--		
	VC				120-340		
	XPMT 042004 XPMT 052804 XPMT 063306 XPMT 074006 XPMT 094508 XPMT 125812 XPMT 156812	K300	P10-P25	K10-K30			
	fz	0,06-0,15		0,06-0,2			
	ap	--		--			
	VC	170-220		200-250			
	XPMT 042004 XPMT 052804 XPMT 063306 XPMT 074006 XPMT 094508 XPMT 125812 XPMT 156812	P300	P10-P30	M20-M35	K10-K30		
	fz	0,06-0,15	0,06-0,15	0,06-0,2			
	ap	--	--	--			
	VC	150-200	140-190	180-230			
	WCHX 040102FN-BAL LW610 WCHX 040104FN-BAL LW610 WCHX 05T102FN-BAL LW610 WCHX 05T104FN-BAL LW610 WCHX 060202FN-BAL LW610 WCHX 060204FN-BAL LW610 WCHX 070304FN-BAL LW610 K15 WCHX 070308FN-BAL LW610 WCHX 090304FN-BAL LW610 WCHX 090308FN-BAL LW610 WCHX 10T304FN-BAL LW610 WCHX 10T308FN-BAL LW610 WCHX 130508FN-BAL LW610				K10-K20		
	fz				0,01-0,13		
	ap				--		
	VC				120-230		

MILLING

MINIMILL

MOULDMILL

MICROTOOLS
AMS

MINITOOLS

GROOVING

GE DRILLS

NICECUT

YES DRILLS

SLIM CHUCK

INSERTS




SPEED TIGER

RICAMBI

PARAMETRI
INSERTI

PARAMETRI INSERTI _ SCHNITTDATEN _ CUTTING CONDITION

DRILLING	P	M	K	N	S	H
WCHX 040102EN-BFM LCP25T WCHX 040104EN-BFM LCP25T WCHX 05T102EN-BFM LCP25T WCHX 05T104EN-BFM LCP25T WCHX 060202EN-BFM LCP25T WCHX 060204EN-BFM LCP25T WCHX 070304EN-BFM LCP25T WCHX 070308EN-BFM LCP25T WCHX 090304EN-BFM LCP25T WCHX 090308EN-BFM LCP25T WCHX 10T304EN-BFM LCP25T WCHX 10T308EN-BFM LCP25T WCHX 130508EN-BFM LCP25T	K400	P25-P40	M20-M40	K20-K40		
 fz	0,01-0,13	0,01-0,13	0,01-0,13			
ap						
VC	130-240	90-160	120-180			
WCHX 040102EN-BFM WCHX 040104EN-BFM LCM45T WCHX 05T102EN-BFM LCM45T WCHX 05T104EN-BFM LCM45T WCHX 060202EN-BFM LCM45T WCHX 060204EN-BFM LCM45T WCHX 070304EN-BFM LCM45T WCHX 070308EN-BFM LCM45T WCHX 090304EN-BFM LCM45T WCHX 090308EN-BFM LCM45T WCHX 10T304EN-BFM LCM45T WCHX 10T308EN-BFM LCM45T WCHX 130508EN-BFM LCM45T	P300	P30-P40	M30-M40			
 fz	0,01-0,13	0,01-0,13				
ap						
VC	70-150	50-150				

GROOVING		P	M	K	N	S	H
	GELCGS...	P25-P40	M20-M40	K20-K40	K10-K15		
	K300 VC	120-220		180-200			
	GELCGD...		130-150				
	P300 VC						
	K15X VC				200-300		
	fz	0,04-0,18	0,04-0,16	0,04-0,18	0,04-0,26		
	CDGW 040101 FN CVD 2P	PKD			x		
	fz				0,005 – 0,15		
	ap				2		
	VC				20 - 600		
	DCGW 04T001 FN CVD 2P	PKD			x		
	fz				0,005 – 0,15		
	ap				2		
	VC				20 - 600		
	VCGW 050101 FN CVD 2P	PKD			x		
	fz				0,005 – 0,15		
	ap				2		
	VC				20 - 600		
	WCGW 020101 FN CVD 3P	PKD			x		
	fz				0,005 – 0,15		
	ap				2		
	VC				20 - 600		
	CDGW 040101 H65-2C	CBN					x
	fz						0,01 – 0,15
	ap						2
	VC						80 - 250
	DCGW 04T001 H65-2C	CBN					x
	fz						0,01 – 0,15
	ap						2
	VC						80 - 250
	VCGW 050101 H65-2C	CBN					x
	fz						0,01 – 0,15
	ap						2
	VC						80 - 250
	WCGW 020101 H65-3C	CBN					x
	fz						0,01 – 0,15
	ap						2
	VC						80 - 250



GE TOOLING S.r.l.

Via Elsa Morante, 71 - 41123 Modena
Tel. +39 059 331543 - Fax. +39 059 822617
getools@getooling.it - www.getooling.it