

## CrazyDrill Cool

**CRAZYDRILL**  
Cool

### HIGH PRECISION FOR DEEP HOLES UP TO 15 X D



Mikron Tool CrazyDrill Cool line offers a through coolant deep-hole drill program for a wide range of materials. The application range covered goes from hole diameters of 0.75 mm up to 6.00 mm and depth of cut up to 15 x d.

Depending on the material to be machined, the drills are available with or without wear protective coating.

Combining Mikron Tool CrazyDrill Pilot (or CrazyDrill Coolpilot e.g. CrazyDrill Pilot SST-Inox for difficult to machine materials) with CrazyDrill Cool allows for accuracy in deep drilling operations. Depending on the material to be machined, a pecking cycle for chip removal may be necessary. By means of fine-tuned tolerances between CrazyDrill Pilot and CrazyDrill Cool, accurate drilling and excellent hole quality are assured with precision alignment and no measurable diameter difference between tools.

The through coolant holes supply adequate and continuous coolant to the tip for constant cooling, lubrication and chip removal. The power chamber reduces pressure loss assuring higher flowrate when drilling even the smallest diameters. High drilling speed and good tool life are the result.

## Deep and challenging

### CONSISTENT AND ACCURATE DRILLING UP TO 15 X D

Mikron Tool CrazyDrill Cool line offers a through coolant deep-hole drill program for a wide range of materials. The application range covered goes from hole diameters of 0.75 mm up to 6.00 mm and depth of cut up to 15 x d.

Depending on the material to be machined, the drills are available with or without wear protective coating.

■ CrazyDrill Cool, depth of cut available 6 x d / 10 x d / 15 x d, coated and uncoated.

6 x d

■ Internal cooling  
■ Coated / uncoated



Page 297

10 x d

■ Internal cooling  
■ Coated / uncoated



Page 305

15 x d

■ Internal cooling  
■ Coated / uncoated



Page 313

#### 1 | SHAFT

The robust solid carbide shaft guarantees a high degree of concentric accuracy and reliability.

#### 2 | CARBIDE GRADE

The use of latest generation carbide grades allows highest machining speed and feed.

#### 3 | COATING / SURFACE TREATMENT

■ **Version CA (uncoated):** Extremely smooth flutes to limit chip jamming risk. Edge preparation provides consistent tool life. Optimal for aluminum, brass and bronze.


■ **Version CS (coated):** The additional high-performance eXedur RI/RIP coating provides thermal and wear protection, guaranteeing a longer tool life. Optimal for steels, alloyed steels, cast iron.

#### 4 | THROUGH COOLANT AND POWER CHAMBER

The through coolant holes supply adequate and continuous coolant to the tip for constant cooling, lubrication and chip removal. The power chamber reduces pressure loss and increases flowrate even when drilling smallest diameters.

#### 5 | CUTTING GEOMETRY

The unique CrazyDrill S tip geometry together with the special designed flutes allows highest drilling performance, improves chip evacuation and limits the need for pecking (depending on work material).



Drill tip




## Benefits and applications



### THE SMALL DRILL WITH INTERNAL COOLING FOR DRILLING DEEP HOLES

- **SHORT MACHINING TIME** | due to high feed rates
- **LONG TOOL LIFE** | due to efficient coolant
- **HIGH DEGREE OF PRECISION** | due to small tolerances



**COMPONENT**

Spray nozzle

**MATERIAL**

X2CrMoTiS18-2 / 1.4523 / ASTM 430F

**MACHINING**

- 50 holes
- d = 1.0 mm
- Drilling depth 15 mm

**DRILLING TOOL**




Mikron Tool - CrazyDrill Cool - 15 x d - coated

DATA	MIKRON TOOL
Tool type	CrazyDrill Cool - Carbide - Coated - Internal cooling
Item number	2.CD.150100.CS
Cutting data	$v_c = 50$ m/min $f = 0.03$ mm/rev $Q_1 = 0.5$ mm $Q_x = 0.25$ mm

APPLICATION DOMAINS	COMPONENTS EXAMPLES
Dental	Dental implants
Medical technology	Component for measuring device
Automotive industry	Components for injection system
Mechanical engineering	Locking bolt
Food industry	Nozzle
Power industry	Blade

MATERIALS GROUPS	EXAMPLES		
	Mat. no.	DIN	AISI / ASTM / UNS
<b>Group P</b> Unalloyed and alloyed steel	1.0401	C15	1015
	1.3505	100Cr6	52100
	1.2436	X210CrW12	D4 / D6
<b>Group M</b> Stainless steel	1.4105	X6CrMoS17	430F
	1.4034	X46Cr13	420C
	1.4542	X5CrNiCuNb 16-4	630
	1.4301	X5CrNi 18-10	304
<b>Group K</b> Cast iron	0.7040	GGG40	60-40-18
<b>Group N</b> Non ferrous metals	3.2315	AlMgSi1	6351
	3.2163	GD-AlSi9Cu3	A380
	2.004	Cu-OF / CW008A	C10100
	2.0321	CuZn37 CW508L	C27400
	2.102	CuSn6	C51900
	2.096	CuAl9Mn2	C63200
<b>Group S1</b> Super alloys	2.4856		INCONEL 625
	2.4665	NiCr22Fe18Mo	HASTELLOY X
<b>Group S3</b> CrCo alloys	2.4964	CoCr20W15Ni	HAYNES 25
<b>Group H1</b> Hardened steel <55 HRC	1.2510	100MnCrMoW4	O1

# CrazyDrill Cool 10 x d - coated / uncoated

Carbide			Z2	
	Ø d <sub>1</sub>	0.1 - 3.0 mm		3.1 - 6.0 mm
Tolerance		+ 0.004 mm 0		+ 0.006 mm + 0.001 mm

## DRILLING WITH INTERNAL COOLING



Coated Uncoated

CrazyDrill Cool 10 x d is specially engineered for:

- **Coated version** (eXedur RI / RIP) - unalloyed, alloyed and stainless steels, cast iron and even for heat treated steels up to 55HRC.
- **Uncoated version** - non ferrous material

The through coolant holes supplies constant coolant flow to the tip. For small diameters, an additional power chamber in the shank assures a higher flowrate. Comparatively at same coolant pressure three time flowrate will be supplied to the cutting area. This technology enables high drilling speed with more effective chip removal. For coated version the high-performance eXedur RI / RIP coating provides thermal and wear protection, guaranteeing a longer tool life.


We recommend CrazyDrill Pilot or, for difficult to machine materials CrazyDrill Coolpilot / CrazyDrill Pilot SST-Inox, for hole preparation on flat and even surfaces. In case of inclined surfaces up to 60° we recommend CrazyDrill Crosspilot as pilot drill. Pilot drilling with CrazyDrill Pilot / CrazyDrill Coolpilot / CrazyDrill Pilot SST-Inox / CrazyDrill Crosspilot is the perfect start for an accurate (position and alignment accuracy) and consistent machining process guaranteed by carefully determined tool tolerances. For details see "drilling process".

### Coolant type, pressure and filtration

Recommendations for coolant type, pressure and filtration are on page "drilling process".

### Please note

You couldn't find your suitable version of the CrazyDrill Cool - coated / uncoated (diameter, length, cutting direction...)? Ask us about our customized versions!

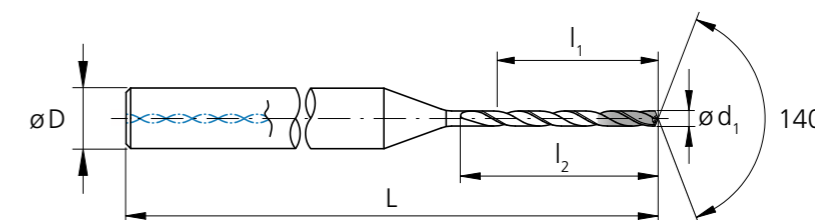

d <sub>1</sub>	d <sub>1</sub>	l <sub>1</sub>	l <sub>2</sub>	D (h6)	L	Item number	Coated	Uncoated	Availability
[mm]	[inch]	[mm]	[mm]	[mm]	[mm]				
0.75		7.5	9.8	3	54.0	2.CD.100075	.CS	.CA	■
0.793	1/32	8.0	10.4	3	54.0	2.CD.100F132	.CS	-	☑
0.80		8.0	10.4	3	54.0	2.CD.100080	.CS	.CA	■
0.85		8.5	11.1	3	56.0	2.CD.100085	.CS	.CA	■
0.90		9.0	11.7	3	56.0	2.CD.100090	.CS	.CA	■
0.95		9.5	12.4	3	56.0	2.CD.100095	.CS	.CA	■
1.00		10.0	13.0	4	59.0	2.CD.100100	.CS	.CA	■
1.05		10.5	13.7	4	59.0	2.CD.100105	.CS	.CA	■
1.10		11.0	14.3	4	59.0	2.CD.100110	.CS	.CA	■
1.15		11.5	15.0	4	59.0	2.CD.100115	.CS	.CA	■
1.20		12.0	15.6	4	61.5	2.CD.100120	.CS	.CA	■
1.25		12.5	16.3	4	61.5	2.CD.100125	.CS	.CA	■
1.30		13.0	16.9	4	61.5	2.CD.100130	.CS	.CA	■
1.35		13.5	17.6	4	61.5	2.CD.100135	.CS	.CA	■
1.40		14.0	18.0	4	61.5	2.CD.100140	.CS	.CA	■
1.45		14.5	18.9	4	63.5	2.CD.100145	.CS	.CA	■
1.50		15.0	19.5	4	63.5	2.CD.100150	.CS	.CA	■
1.55		15.5	20.2	4	63.5	2.CD.100155	.CS	.CA	■
1.587	1/16	16.0	20.8	4	66.0	2.CD.100F116	.CS	-	☑
1.60		16.0	20.8	4	66.0	2.CD.100160	.CS	.CA	■
1.65		16.5	21.5	4	66.0	2.CD.100165	.CS	.CA	■
1.70		17.0	22.1	4	66.0	2.CD.100170	.CS	.CA	■
1.75		17.5	22.8	4	66.0	2.CD.100175	.CS	.CA	■
1.80		18.0	23.4	4	68.0	2.CD.100180	.CS	.CA	■
1.85		18.5	24.1	4	68.0	2.CD.100185	.CS	.CA	■
1.90		19.0	24.7	4	68.0	2.CD.100190	.CS	.CA	■
1.95		19.5	25.0	4	68.0	2.CD.100195	.CS	.CA	■
2.00		20.0	26.0	4	70.0	2.CD.100200	.CS	.CA	■
2.05		20.5	26.7	4	70.0	2.CD.100205	.CS	.CA	■
2.10		21.0	27.3	4	70.0	2.CD.100210	.CS	.CA	■




- Stock item
- ☑ Stock item only in one version

### Complementary products


CrazyDrill Pilot	p.161
CrazyDrill Crosspilot	p.175
CrazyDrill Coolpilot	p.189
CrazyDrill Pilot SST-Inox	p.149

**Regrinding:** This product can be reground starting from Ø 1.4 mm.

# CrazyDrill Cool 10 x d - coated / uncoated

Carbide			Z2	
	Ø d <sub>1</sub>	0.1 - 3.0 mm	3.1 - 6.0 mm	
Tolerance		+ 0.004 mm 0	+ 0.006 mm + 0.001 mm	

## DRILLING WITH INTERNAL COOLING

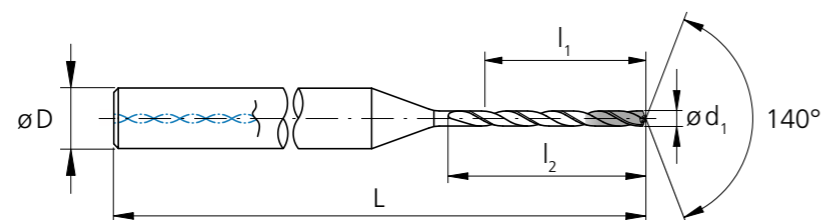

d <sub>1</sub>	d <sub>1</sub>	l <sub>1</sub>	l <sub>2</sub>	D (h6)	L	Item number	Coated	Uncoated	Availability
[mm]	[inch]	[mm]	[mm]	[mm]	[mm]				
2.15		21.5	28.0	4	72.0	2.CD.100215	.CS	.CA	■
2.20		22.0	28.6	4	72.0	2.CD.100220	.CS	.CA	■
2.25		22.5	29.3	4	72.0	2.CD.100225	.CS	.CA	■
2.30		23.0	29.9	4	74.0	2.CD.100230	.CS	.CA	■
2.35		23.5	30.6	4	74.0	2.CD.100235	.CS	.CA	■
2.381	3/32	24.0	31.2	4	74.0	2.CD.100F332	.CS	-	☑
2.40		24.0	31.2	4	74.0	2.CD.100240	.CS	.CA	■
2.45		24.5	31.9	4	75.5	2.CD.100245	.CS	.CA	■
2.50		25.0	32.5	4	75.5	2.CD.100250	.CS	.CA	■
2.55		25.5	33.2	4	75.5	2.CD.100255	.CS	.CA	■
2.60		26.0	33.8	4	77.5	2.CD.100260	.CS	.CA	■
2.65		26.5	34.5	4	77.5	2.CD.100265	.CS	.CA	■
2.70		27.0	35.1	4	77.5	2.CD.100270	.CS	.CA	■
2.75		27.5	35.8	4	79.0	2.CD.100275	.CS	.CA	■
2.80		28.0	36.4	4	79.0	2.CD.100280	.CS	.CA	■
2.85		28.5	37.1	4	79.0	2.CD.100285	.CS	.CA	■
2.90		29.0	37.7	4	80.5	2.CD.100290	.CS	.CA	■
2.95		29.5	38.4	4	80.5	2.CD.100295	.CS	.CA	■
3.00		30.0	39.0	6	85.0	2.CD.100300	.CS	.CA	■
3.05		30.5	39.7	6	85.0	2.CD.100305	.CS	.CA	■
3.10		31.0	40.3	6	85.0	2.CD.100310	.CS	.CA	■
3.15		31.5	41.0	6	86.5	2.CD.100315	.CS	.CA	■
3.175	1/8	32.0	41.6	6	86.5	2.CD.100F18	.CS	-	☑
3.20		32.0	41.6	6	86.5	2.CD.100320	.CS	.CA	■
3.25		32.5	42.3	6	86.5	2.CD.100325	.CS	.CA	■
3.30		33.0	42.9	6	86.5	2.CD.100330	.CS	.CA	■
3.35		33.5	43.6	6	89.0	2.CD.100335	.CS	.CA	■
3.40		34.0	44.2	6	89.0	2.CD.100340	.CS	.CA	■
3.45		34.5	44.9	6	89.0	2.CD.100345	.CS	.CA	■
3.50		35.0	45.5	6	91.0	2.CD.100350	.CS	.CA	■
3.55		35.5	46.2	6	91.0	2.CD.100355	.CS	.CA	■
3.60		36.0	46.8	6	91.0	2.CD.100360	.CS	.CA	■

■ Stock item  
☑ Stock item only in one version

d <sub>1</sub>	d <sub>1</sub>	l <sub>1</sub>	l <sub>2</sub>	D (h6)	L	Item number	Coated	Uncoated	Availability
[mm]	[inch]	[mm]	[mm]	[mm]	[mm]				
3.65		36.5	47.5	6	91.0	2.CD.100365	.CS	.CA	■
3.70		37.0	48.1	6	93.0	2.CD.100370	.CS	.CA	■
3.75		37.5	48.8	6	93.0	2.CD.100375	.CS	.CA	■
3.80		38.0	49.4	6	93.0	2.CD.100380	.CS	.CA	■
3.85		38.5	50.1	6	95.0	2.CD.100385	.CS	.CA	■
3.90		39.0	50.7	6	95.0	2.CD.100390	.CS	.CA	■
3.95		39.5	51.4	6	95.0	2.CD.100395	.CS	.CA	■
3.968	5/32	40.0	52.0	6	95.0	2.CD.100F532	.CS	-	☑
4.00		40.0	52.0	6	95.0	2.CD.100400	.CS	.CA	■
4.10		41.0	53.3	6	98.5	2.CD.100410	.CS	.CA	■
4.20		42.0	54.6	6	98.5	2.CD.100420	.CS	.CA	■
4.30		43.0	54.2	6	98.5	2.CD.100430	.CS	.CA	■
4.40		44.0	55.4	6	98.5	2.CD.100440	.CS	.CA	■
4.50		45.0	54.9	6	98.5	2.CD.100450	.CS	.CA	■
4.60		46.0	56.1	6	98.5	2.CD.100460	.CS	.CA	■
4.70		47.0	61.1	6	106.0	2.CD.100470	.CS	.CA	■
4.762	3/16	48.0	62.4	6	106.0	2.CD.100F316	.CS	-	☑
4.80		48.0	62.4	6	106.0	2.CD.100480	.CS	.CA	■
4.90		49.0	61.7	6	106.0	2.CD.100490	.CS	.CA	■
5.00		50.0	63.0	6	106.0	2.CD.100500	.CS	.CA	■
5.10		51.0	64.3	6	106.0	2.CD.100510	.CS	.CA	■
5.20		52.0	62.4	6	106.0	2.CD.100520	.CS	.CA	■
5.30		53.0	63.6	6	106.0	2.CD.100530	.CS	.CA	■
5.40		54.0	70.2	6	113.5	2.CD.100540	.CS	.CA	■
5.50		55.0	71.5	6	113.5	2.CD.100550	.CS	.CA	■
5.560	7/32	56.0	72.8	6	113.5	2.CD.100F732	.CS	-	☑
5.60		56.0	72.8	6	113.5	2.CD.100560	.CS	.CA	■
5.70		57.0	71.8	6	113.5	2.CD.100570	.CS	.CA	■
5.80		58.0	73.1	6	113.5	2.CD.100580	.CS	.CA	■
5.90		59.0	72.0	6	113.5	2.CD.100590	.CS	.CA	■
6.00		60.0	73.2	6	113.5	2.CD.100600	.CS	.CA	■

■ Stock item  
☑ Stock item only in one version

**Complementary products**



CrazyDrill Pilot	p.161
CrazyDrill Crosspilot	p.175
CrazyDrill Coolpilot	p.189
CrazyDrill Pilot SST-Inox	p.149

# CrazyDrill Cool 10 x d - coated

RECOMMENDATION FOR USE  
● Excellent | ● Good | ○ Acceptable | ☒ Not recommended



## DRILLING WITH INTERNAL COOLING | CUTTING DATA OVERVIEW



Materials group	Material	Mat. no.	DIN	AISI/ASTM/UNS	v <sub>c</sub> [m/min]	Q <sub>1</sub>	Q <sub>x</sub>	f [mm/rev]									
								Ød1									
								0.8 mm 1/32" f	1.0 mm f	1.25 mm f	1.5 mm 1/16" f	2.0 mm f	2.5 mm 3/32" f	3.0 mm 1/8" f	4.0 mm 5/32" f	5.0 mm 3/16" - 7/32" f	6.0 mm f
P	Unalloyed carbon steel Rm < 800 N/mm <sup>2</sup>	1.0301	C10	AISI 1010	80	6xd1	2xd1	0.050	0.080	0.110	0.140	0.180	0.210	0.240	0.280	0.310	0.340
		1.0401	C15	AISI 1015													
		1.1191	C45E/CK45	AISI 1045													
		1.0044	S275JR	AISI 1020													
		1.0715	11SMn30	AISI 1215													
		1.5752	15NiCr13	ASTM 3415 / AISI 3310													
	Low alloyed steel Rm > 900 N/mm <sup>2</sup>	1.7131	16MnCr5	AISI 5115	80	6xd1	2xd1	0.050	0.080	0.100	0.120	0.150	0.170	0.190	0.220	0.240	0.260
		1.3505	100Cr6	AISI 52100													
		1.7225	42CrMo4	AISI 4140													
		1.2842	90MnCrV8	AISI O2													
		1.2379	X153CrMoV12	AISI D2													
		1.2436	X210CrW12	AISI D4/D6													
M	Stainless steel ferritic	1.4016	X6Cr17	AISI 430 / UNS S43000	50	0.5xd1	0.25xd1	0.011	0.030	0.045	0.060	0.080	0.090	0.100	0.120	0.130	0.140
		1.4105	X6CrMoS17	AISI 430F													
		1.4034	X46Cr13	AISI 420C													
		1.4112	X90CrMoV18	AISI 440B													
		1.4542	X5CrNiCuNb 16-4	AISI 630 / ASTM 17-4 PH													
		1.4545	X5CrNiCuNb 15-5	ASTM 15-5 PH													
	Stainless steel martensitic	1.4301	X5CrNi 18-10	AISI 304	40	0.5xd1	0.25xd1	0.010	0.020	0.030	0.040	0.060	0.080	0.090	0.110	0.120	0.130
		1.4435	X2CrNiMo 18-14-3	AISI 316L													
		1.4441	X2CrNiMo 18-15-3	AISI 316LM													
		1.4539	X1NiCrMoCu 25-20-5	AISI 904L													
		1.4301	X5CrNi 18-10	AISI 304													
		1.4435	X2CrNiMo 18-14-3	AISI 316L													
Stainless steel austenitic	1.4441	X2CrNiMo 18-15-3	AISI 316LM	40	0.5xd1	0.25xd1	0.010	0.020	0.030	0.040	0.060	0.080	0.090	0.110	0.120	0.130	
	1.4539	X1NiCrMoCu 25-20-5	AISI 904L														
	1.4301	X5CrNi 18-10	AISI 304														
	1.4435	X2CrNiMo 18-14-3	AISI 316L														
K	Cast iron	0.6020	GG20	ASTM 30	80	10xd1	-	0.065	0.090	0.110	0.130	0.160	0.180	0.200	0.230	0.250	0.270
		0.6030	GG30	ASTM 40B													
		0.7040	GGG40	ASTM 60-40-18													
		0.7060	GGG60	ASTM 80-60-03													
N	Aluminium alloy wrought	3.2315	AlMgSi1	ASTM 6351	300	10xd1	-	0.040	0.050	0.060	0.075	0.080	0.100	0.120	0.140	0.170	0.200
		3.4365	AlZnMgCu1.5	ASTM 7075													
	Aluminium alloy cast	3.2163	GD-AlSi9Cu3	ASTM A380	200	10xd1	-	0.060	0.070	0.080	0.100	0.120	0.150	0.170	0.200	0.220	0.250
		3.2381	GD-AlSi10Mg	UNS A03590													
	Copper	2.004	Cu-OF / CW008A	UNS C10100	100	1.5xd1	1xd1	0.045	0.055	0.070	0.080	0.090	0.100	0.110	0.130	0.150	0.190
		2.0065	Cu-ETP / CW004A	UNS C11000													
	Brass lead free	2.0321	CuZn37 CW508L	UNS C27400	140	1xd1	0.5xd1	0.045	0.055	0.070	0.080	0.090	0.100	0.110	0.130	0.150	0.190
		2.036	CuZn40 CW509L	UNS C28000													
	Brass, Bronze Rm < 400 N/mm <sup>2</sup>	2.0401	CuZn39Pb3 / CW614N	UNS C38500	120	2xd1	1xd1	0.070	0.090	0.100	0.120	0.135	0.150	0.170	0.190	0.200	0.220
		2.102	CuSn6	UNS C51900													
	Bronze Rm < 600 N/mm <sup>2</sup>	2.0966	CuAl10Ni5Fe4	UNS C63000	200	10xd1	-	0.015	0.025	0.035	0.050	0.065	0.085	0.100	0.120	0.140	0.190
		2.096	CuAl9Mn2	UNS C63200													
S <sub>1</sub>	Super alloys	2.4856		Inconel 625	20	0.5xd1	0.25xd1	0.007	0.010	0.012	0.015	0.018	0.020	0.022	0.032	0.037	0.042
		2.4668		Inconel 718													
		2.4617	NiMo28	Hastelloy B-2													
		2.4665	NiCr22Fe18Mo	Hastelloy X													
S <sub>2</sub>	Titanium pure	3.7035	Gr.2	ASTM B348 / F67	20	0.5xd1	0.25xd1	0.010	0.020	0.035	0.050	0.065	0.080	0.090	0.100	0.120	0.140
		3.7065	Gr.4	ASTM B348 / F68													
S <sub>3</sub>	Titanium alloys	3.7165	TiAl6V4	ASTM B348 / F136	20	0.5xd1	0.25xd1	0.010	0.020	0.035	0.050	0.065	0.080	0.090	0.100	0.120	0.140
		9.9367	TiAl6Nb7	ASTM F1295													
H <sub>1</sub>	Hardened steel < 55 HRC	2.4964	CoCr20W15Ni	Haynes 25	20	0.5xd1	0.25xd1	0.007	0.010	0.012	0.017	0.022	0.027	0.032	0.037	0.042	0.052
			CrCoMo28	ASTM F1537													
H <sub>2</sub>	Hardened steel ≥ 55 HRC	1.2510	100MnCrMoW4	AISI O1	40	0.5xd1	0.25xd1	0.008	0.010	0.012	0.015	0.020	0.025	0.030	0.040	0.050	0.060
		1.2379	X153CrMoV12	AISI D2													

## Drilling process CrazyDrill Cool

### ACCURATE AND RAPID DRILLING UP TO 15 X D

#### Coolant type, filtration and coolant pressure

**Coolant type:** For best results, Mikron Tool recommends the use of cutting oil as coolant fluid. Alternatively, emulsion of 8% or more with EP-Additives (Extreme-Pressure-Additives) can be used with good results as well.

**Filtration:** Good filter quality is very important when using through coolant drills. Dirt particles or residual chips can clog the coolant holes and consequently reduce dramatically the flowrate. The following filter qualities must be adhered especially in small diameters:

- Drill with  $\varnothing < 2$  mm filter quality  $\leq 0.010$  mm.
- Drill with  $\varnothing < 3$  mm filter quality  $\leq 0.020$  mm.
- Drill with  $\varnothing < 6$  mm filter quality  $\leq 0.050$  mm.

**Coolant pressure:** To ensure a reliable drilling process the following minimal pressures are required (see chart). Higher pressures are needed for smaller drill size diameters. High pressure is generally better for the cooling and chip evacuation effectiveness.

$\varnothing d, \text{ Tool}$ [mm]	Minimal pressure [bar]
0.75	70
3.00	40
6.00	30

#### Tool holders

For detailed indications for tool holders see chapter "Technical information".

#### CrazyDrill Cool 6 x d

For drilling depth up to 6 x d we recommend pilot drilling or centering only on irregular, rough or inclined surface and if a high position accuracy is requested.

#### CrazyDrill Cool 10 x d / 15 x d

For these drilling depths Mikron Tool recommends pilot drilling for CrazyDrill Cool:

- CrazyDrill Pilot as pilot drill
- CrazyDrill Crosspilot as pilot drill for inclined surfaces
- CrazyDrill Coolpilot as pilot drill for difficult to machine materials
- CrazyDrill Pilot SST-Inox as pilot drill for difficult to machine materials

#### Pilot drilling and drilling

Pilot drilling with CrazyDrill Pilot is the perfect start for an accurate (position and alignment accuracy) and consistent machining process. Inclined surfaces requires the use of CrazyDrill Crosspilot.

The quality of drilling (position and alignment accuracy, no measurable transition from pilot hole to the following drilling steps) and a stable machining process are guaranteed by carefully determined tool tolerances.




## Drilling process CrazyDrill Cool

### ONE STEP DRILLING (DEPENDING ON MATERIAL, SEE CUTTING DATA CHART)


#### 1 | PILOT DRILLING

- With CrazyDrill Pilot / CrazyDrill Coolpilot or CrazyDrill Pilot SST-Inox (straight surfaces) or CrazyDrill Crosspilot (inclined surfaces).

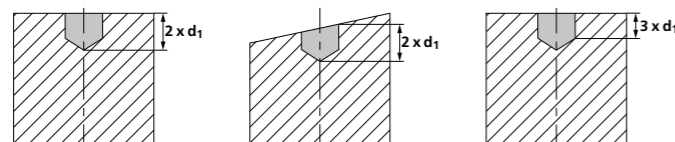

#### 2 | DRILLING

- Turn on coolant of CrazyDrill Cool.
- Drilling with CrazyDrill Cool to full depth  $Q_1$  in one step.

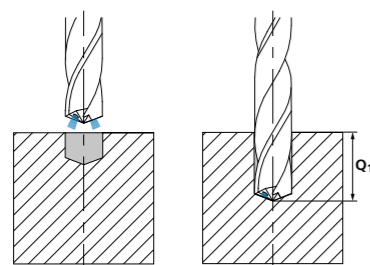

Note:


After the drill reached desired cutting depth, return at increased feed rate (or in case of perfect conditions rapid traverse) to safety position.

### DRILLING AS PER DIN 66025 / PAL (DEPENDING ON MATERIAL, SEE CUTTING DATA CHART)

G83 deep-drilling cycle with chip break and chip removal (pecks)  
 $Q$  = depth of the respective peck


#### 1 | PILOT DRILLING

- With CrazyDrill Pilot / CrazyDrill Coolpilot or CrazyDrill Pilot SST-Inox (straight surfaces) or CrazyDrill Crosspilot (inclined surfaces).

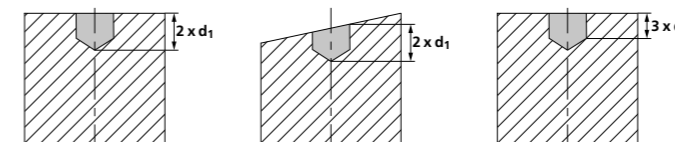


#### 2 | DRILLING

- Turn on coolant of CrazyDrill Cool.
- Drilling with CrazyDrill Cool up to maximum drilling depth ( $Q_1$ ) in one step, followed by peck to remove chips.

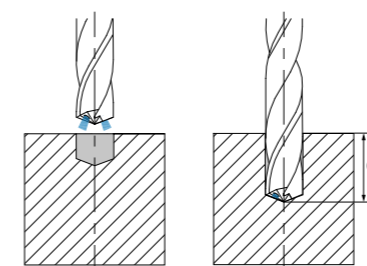

- Additional steps ( $Q_x$ ) as per cutting data chart, followed by peck to remove chips.



Note:

Drill can be retracted completely from the hole between pecks. However if vibrations occur, we recommend that the drill tip never exits hole to prevent breakage. After the drill reached desired cutting depth, return at increased feed rate (or in case of perfect conditions rapid traverse) to safety position.