

MiquDrill 210

MIQUDRILL
210

A SMALL DRILL WITH GREAT AVAILABILITY



Mikron Tool offers with MiquDrill 210 a drill for micro-machining. In the uncoated version it's available in the diameter range from 0.1 mm to 3.0 mm, in the coated version from 0.3 mm to 3.0 mm. Its usable lengths are, based on diameter, between 2.4 x d and 8 x d. Both versions are available from stock in smallest increments of 0.01 mm up to Ø2.0 mm and of 0.05 mm up to Ø3.0 mm.

This precision drill for micro-machining is the optimal solution for the production of small and medium batch sizes or a large range of variants. First class quality and process accuracy are assured. It is universally applicable for steels (alloyed and unalloyed), cast iron, nonferrous metals and in the coated version also for hardened steel < 55 HRC.



Accurate micro-machining

FOR SMALL SERIES AND LARGE RANGE OF MATERIALS

Mikron Tool offers with MiquDrill 210 a drill for micro-machining. In the uncoated version it's available in the diameter range from 0.1 mm to 3.0 mm, in the coated version from 0.3 mm to 3.0 mm. Its usable lengths are, based on diameter, between 2.4 x d and 8 x d. Both versions are available from stock in smallest increments of 0.01 mm up to Ø2.0 mm and of 0.05 mm up to Ø3.0 mm.

■ MiquDrill 210, usable length from 2.4 to 8 x d, coated and uncoated

Uncoated

- External cooling
- Ø0.1 - 3.0 mm



Page 223

Coated

- External cooling
- Ø0.3 - 3.0 mm



Page 223

1 | SHAFT

The accurately grinded shaft guarantees high concentricity and therefore highest position accuracy.

2 | SOLID CARBIDE

The use of latest generation carbide grades allows highest machining speed and feed if compared with HSS tools, drilling with MiquDrill is considerably faster.

3 | COATING

The coated version of the drill is adapted for hardened steels < 55 HRC and reaches even a better tool life.

4 | HELICAL FLUTE

The geometry of the helical flute guarantees an optimal chip flow. No chip removal necessary.


5 | TIP GEOMETRY

The geometry of the universal drill is especially adapted for micro-machining. High process accuracy and productivity are guaranteed.

6 | DIAMETER RANGE AND INCREMENTS

Available from stock in diameters from 0.1 mm and in smallest diameter increments of 0.01 mm, respectively of 0.05 mm starting from Ø 2.0 mm.

Tip drill




Benefits and applications



FITS EVERY APPLICATION

- **HIGH DEGREE OF PROCESS RELIABILITY** | due to high quality
- **HIGH DEGREE OF PRECISION** | due to small tolerances
- **LOW PRODUCTION COSTS** | due to the low cost of tool



COMPONENT
Welding nozzle

MATERIAL
CuZn39Pb3 / 2.0401 / UNS 38500

- MACHINING**
- Drilling
 - d = 2 mm
 - Drilling depth 6 mm

DRILLING TOOL
Mikron Tool - MiquDrill 210 - coated

DATA	MIKRON TOOL
Tool type	MiquDrill 210 - Carbide - Coated - External cooling
Item number	2.MD.210200.1
Cutting data	$v_c = 80$ m/min $f = 0.048$ mm/rev $Q_1 = 4$ mm $Q_x = 2$ mm

APPLICATION DOMAINS	COMPONENTS EXAMPLES
Automotive industry	Components for gasoline direct injection
Mechanical engineering	Bearings

MATERIALS GROUPS	EXAMPLES		
	Mat. no.	DIN	AISI / ASTM / UNS
Group P Unalloyed and alloyed steel	1.0401	C15	1015
	1.3505	100Cr6	52100
	1.2436	X210CrW12	D4 / D6
Group K Cast iron	0.7040	GGG40	60-40-18
Group N Non ferrous metals	3.2315	AlMgSi1	6351
	3.2163	GD-AlSi9Cu3	A380
	2.004	Cu-OF / CW008A	C10100
	2.0321	CuZn37 CW508L	C27400
	2.102	CuSn6	C51900
Group H1 Hardened steel <55 HRC	2.096	CuAl9Mn2	C63200
	1.2510	100MnCrMoW4	O1

MiquDrill 210 - coated / uncoated

Carbide



Z2



Ød₁ 0.1 - 3.0 mm
Tolerance 0 -0.004 mm

DRILLING WITH EXTERNAL COOLING



Coated Uncoated

MiquDrill 210 is universally applicable for steel (alloyed and unalloyed), cast iron and nonferrous metals (e.g. aluminum with high silicium level). Available from stock in the diameter range:

- from 0.3 mm to 3.0 mm - coated version (eXedur RIP)
- from 0.1 mm to 3.0 mm - uncoated version

with the following increment:

- 0.01 mm in the diameter range from 0.1 mm to 2.0 mm
- 0.05 mm from 2.0 mm to 3.0 mm

Compared to uncoated version, "MiquDrill 210 coated" is the solution for higher requirements concerning tool life and/or shorter machining times, the machining of hardened steel < 55 HRC and also for difficult-to-machine materials.


The geometry of MiquDrill 210, the tool with good price / performance ratio, is especially designed for micro-machining of drilling depths between 2.4 and 8.0 x d. These depths are reached with few chip pecking cycles.

Coolant type, pressure and filtration

Recommendations for coolant type, pressure and filtration are on page "drilling process".

Please note

You couldn't find your suitable version of the MiquDrill 210 - coated / uncoated (diameter, length, cutting direction...)? Ask us about our customized versions!

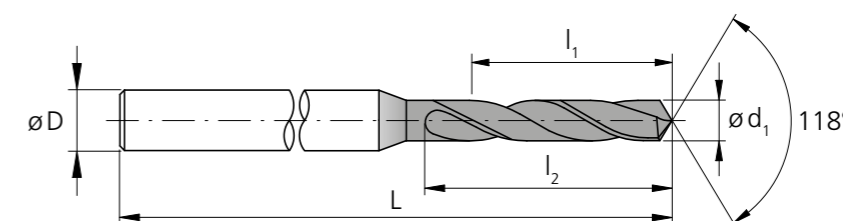

d ₁	l ₁	l ₂	D (h6)	L	Item number	Coated	Uncoated	Availability
[mm]	[mm]	[mm]	[mm]	[mm]				
0.10	0.50	0.6	1.0	30	2.MD.210010	-	.0	■
0.11	0.49	0.6	1.0	30	2.MD.210011	-	.0	■
0.12	0.48	0.6	1.0	30	2.MD.210012	-	.0	■
0.13	0.67	0.8	1.0	30	2.MD.210013	-	.0	■
0.14	0.66	0.8	1.0	30	2.MD.210014	-	.0	■
0.15	0.65	0.8	1.0	30	2.MD.210015	-	.0	■
0.16	0.84	1.0	1.0	30	2.MD.210016	-	.0	■
0.17	0.83	1.0	1.0	30	2.MD.210017	-	.0	■
0.18	0.82	1.0	1.0	30	2.MD.210018	-	.0	■
0.19	0.81	1.0	1.0	30	2.MD.210019	-	.0	■
0.20	0.80	1.0	1.0	30	2.MD.210020	-	.0	■
0.21	0.79	1.0	1.0	30	2.MD.210021	-	.0	■
0.22	0.78	1.0	1.0	30	2.MD.210022	-	.0	■
0.23	0.77	1.0	1.0	30	2.MD.210023	-	.0	■
0.24	0.76	1.0	1.0	30	2.MD.210024	-	.0	■
0.25	0.75	1.0	1.0	30	2.MD.210025	-	.0	■
0.26	0.74	1.0	1.0	30	2.MD.210026	-	.0	■
0.27	0.73	1.0	1.0	30	2.MD.210027	-	.0	■
0.28	0.72	1.0	1.0	30	2.MD.210028	-	.0	■
0.29	0.71	1.0	1.0	30	2.MD.210029	-	.0	■
0.30	1.20	1.5	1.0	30	2.MD.210030	.1	.0	■
0.31	1.19	1.5	1.0	30	2.MD.210031	.1	.0	■
0.32	1.18	1.5	1.0	30	2.MD.210032	.1	.0	■
0.33	1.17	1.5	1.0	30	2.MD.210033	.1	.0	■
0.34	1.16	1.5	1.0	30	2.MD.210034	.1	.0	■
0.35	1.15	1.5	1.0	30	2.MD.210035	.1	.0	■
0.36	1.14	1.5	1.0	30	2.MD.210036	.1	.0	■
0.37	1.13	1.5	1.0	30	2.MD.210037	.1	.0	■
0.38	1.12	1.5	1.0	30	2.MD.210038	.1	.0	■
0.39	1.11	1.5	1.0	30	2.MD.210039	.1	.0	■
0.40	1.60	2.0	1.0	30	2.MD.210040	.1	.0	■
0.41	1.59	2.0	1.0	30	2.MD.210041	.1	.0	■
0.42	1.58	2.0	1.0	30	2.MD.210042	.1	.0	■
0.43	1.57	2.0	1.0	30	2.MD.210043	.1	.0	■
0.44	1.56	2.0	1.0	30	2.MD.210044	.1	.0	■




d ₁	l ₁	l ₂	D (h6)	L	Item number	Coated	Uncoated	Availability
[mm]	[mm]	[mm]	[mm]	[mm]				
0.45	3.05	3.5	1.0	30	2.MD.210045	.1	.0	■
0.46	3.04	3.5	1.0	30	2.MD.210046	.1	.0	■
0.47	3.03	3.5	1.0	30	2.MD.210047	.1	.0	■
0.48	3.02	3.5	1.0	30	2.MD.210048	.1	.0	■
0.49	3.51	4.0	1.0	30	2.MD.210049	.1	.0	■
0.50	3.50	4.0	1.0	30	2.MD.210050	.1	.0	■
0.51	3.49	4.0	1.0	30	2.MD.210051	.1	.0	■
0.52	3.48	4.0	1.0	30	2.MD.210052	.1	.0	■
0.53	3.47	4.0	1.0	30	2.MD.210053	.1	.0	■
0.54	3.96	4.5	1.0	30	2.MD.210054	.1	.0	■
0.55	3.95	4.5	1.0	30	2.MD.210055	.1	.0	■
0.56	3.94	4.5	1.0	30	2.MD.210056	.1	.0	■
0.57	3.93	4.5	1.0	30	2.MD.210057	.1	.0	■
0.58	3.92	4.5	1.0	30	2.MD.210058	.1	.0	■
0.59	3.91	4.5	1.0	30	2.MD.210059	.1	.0	■
0.60	3.90	4.5	1.0	30	2.MD.210060	.1	.0	■
0.61	4.39	5.0	1.0	30	2.MD.210061	.1	.0	■
0.62	4.38	5.0	1.0	30	2.MD.210062	.1	.0	■
0.63	4.37	5.0	1.0	30	2.MD.210063	.1	.0	■
0.64	4.36	5.0	1.0	30	2.MD.210064	.1	.0	■
0.65	4.35	5.0	1.0	30	2.MD.210065	.1	.0	■
0.66	4.34	5.0	1.0	30	2.MD.210066	.1	.0	■
0.67	4.33	5.0	1.0	30	2.MD.210067	.1	.0	■
0.68	4.92	5.6	1.0	30	2.MD.210068	.1	.0	■
0.69	4.91	5.6	1.0	30	2.MD.210069	.1	.0	■
0.70	4.90	5.6	1.0	30	2.MD.210070	.1	.0	■
0.71	4.89	5.6	1.0	30	2.MD.210071	.1	.0	■
0.72	4.88	5.6	1.0	30	2.MD.210072	.1	.0	■
0.73	4.87	5.6	1.0	30	2.MD.210073	.1	.0	■
0.74	4.86	5.6	1.0	30	2.MD.210074	.1	.0	■
0.75	4.85	5.6	1.0	30	2.MD.210075	.1	.0	■
0.76	5.74	6.5	1.0	30	2.MD.210076	.1	.0	■
0.77	5.73	6.5	1.0	30	2.MD.210077	.1	.0	■
0.78	5.72	6.5	1.0	30	2.MD.210078	.1	.0	■
0.79	5.71	6.5	1.0	30	2.MD.210079	.1	.0	■

- Stock item, packing unit of 5 pcs.
- Stock item only in uncoated version, packing unit of 5 pcs.


Complementary products	
MiquDrill Centro	p.69
MiquDrill 200	p.111
CrazyDrill Crosspilot	p.175

Regrinding: This product is not suitable for regrinding.

MiquDrill 210 - coated / uncoated

Carbide			Z2	
	Ø d ₁		0.1 - 3.0 mm	
	Tolerance		0 - 0.004 mm	

DRILLING WITH EXTERNAL COOLING

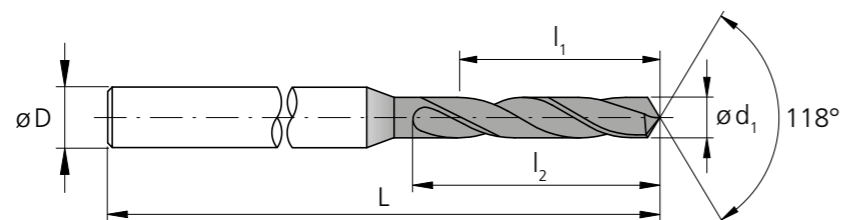

d ₁	l ₁	l ₂	D (h6)	L	Item number	Coated	Uncoated	Availability
[mm]	[mm]	[mm]	[mm]	[mm]				
0.80	5.70	6.5	1.5	30	2.MD.210080	.1	.0	■
0.81	5.69	6.5	1.5	30	2.MD.210081	.1	.0	■
0.82	5.68	6.5	1.5	30	2.MD.210082	.1	.0	■
0.83	5.67	6.5	1.5	30	2.MD.210083	.1	.0	■
0.84	5.66	6.5	1.5	30	2.MD.210084	.1	.0	■
0.85	5.65	6.5	1.5	30	2.MD.210085	.1	.0	■
0.86	6.14	7.0	1.5	30	2.MD.210086	.1	.0	■
0.87	6.13	7.0	1.5	30	2.MD.210087	.1	.0	■
0.88	6.12	7.0	1.5	30	2.MD.210088	.1	.0	■
0.89	6.11	7.0	1.5	30	2.MD.210089	.1	.0	■
0.90	6.10	7.0	1.5	30	2.MD.210090	.1	.0	■
0.91	6.09	7.0	1.5	30	2.MD.210091	.1	.0	■
0.92	6.08	7.0	1.5	30	2.MD.210092	.1	.0	■
0.93	6.07	7.0	1.5	30	2.MD.210093	.1	.0	■
0.94	6.06	7.0	1.5	30	2.MD.210094	.1	.0	■
0.95	6.05	7.0	1.5	30	2.MD.210095	.1	.0	■
0.96	7.04	8.0	1.5	30	2.MD.210096	.1	.0	■
0.97	7.03	8.0	1.5	30	2.MD.210097	.1	.0	■
0.98	7.02	8.0	1.5	30	2.MD.210098	.1	.0	■
0.99	7.01	8.0	1.5	30	2.MD.210099	.1	.0	■
1.00	8.00	9.0	1.5	30	2.MD.210100	.1	.0	■
1.01	7.99	9.0	1.5	30	2.MD.210101	.1	.0	■
1.02	7.98	9.0	1.5	30	2.MD.210102	.1	.0	■
1.03	7.97	9.0	1.5	30	2.MD.210103	.1	.0	■
1.04	7.96	9.0	1.5	30	2.MD.210104	.1	.0	■
1.05	7.95	9.0	1.5	30	2.MD.210105	.1	.0	■
1.06	7.94	9.0	1.5	30	2.MD.210106	.1	.0	■
1.07	7.93	9.0	1.5	30	2.MD.210107	.1	.0	■
1.08	7.92	9.0	1.5	30	2.MD.210108	.1	.0	■
1.09	7.91	9.0	1.5	30	2.MD.210109	.1	.0	■
1.10	7.90	9.0	1.5	30	2.MD.210110	.1	.0	■
1.11	7.89	9.0	1.5	30	2.MD.210111	.1	.0	■
1.12	7.88	9.0	1.5	30	2.MD.210112	.1	.0	■
1.13	7.87	9.0	1.5	30	2.MD.210113	.1	.0	■
1.14	7.86	9.0	1.5	30	2.MD.210114	.1	.0	■
1.15	7.85	9.0	1.5	30	2.MD.210115	.1	.0	■

d ₁	l ₁	l ₂	D (h6)	L	Item number	Coated	Uncoated	Availability
[mm]	[mm]	[mm]	[mm]	[mm]				
1.16	7.84	9.0	1.5	30	2.MD.210116	.1	.0	■
1.17	7.83	9.0	1.5	30	2.MD.210117	.1	.0	■
1.18	7.82	9.0	1.5	30	2.MD.210118	.1	.0	■
1.19	8.81	10.0	1.5	30	2.MD.210119	.1	.0	■
1.20	8.80	10.0	1.5	30	2.MD.210120	.1	.0	■
1.21	8.79	10.0	1.5	30	2.MD.210121	.1	.0	■
1.22	8.78	10.0	1.5	30	2.MD.210122	.1	.0	■
1.23	8.77	10.0	1.5	30	2.MD.210123	.1	.0	■
1.24	8.76	10.0	1.5	30	2.MD.210124	.1	.0	■
1.25	8.75	10.0	1.5	30	2.MD.210125	.1	.0	■
1.26	8.74	10.0	1.5	30	2.MD.210126	.1	.0	■
1.27	8.73	10.0	1.5	30	2.MD.210127	.1	.0	■
1.28	8.72	10.0	1.5	30	2.MD.210128	.1	.0	■
1.29	8.71	10.0	1.5	30	2.MD.210129	.1	.0	■
1.30	8.70	10.0	1.5	30	2.MD.210130	.1	.0	■
1.31	8.69	10.0	1.5	30	2.MD.210131	.1	.0	■
1.32	8.68	10.0	1.5	30	2.MD.210132	.1	.0	■
1.33	10.17	11.5	1.5	30	2.MD.210133	.1	.0	■
1.34	10.16	11.5	1.5	30	2.MD.210134	.1	.0	■
1.35	10.15	11.5	1.5	30	2.MD.210135	.1	.0	■
1.36	10.14	11.5	1.5	30	2.MD.210136	.1	.0	■
1.37	10.13	11.5	1.5	30	2.MD.210137	.1	.0	■
1.38	10.12	11.5	1.5	30	2.MD.210138	.1	.0	■
1.39	10.11	11.5	1.5	30	2.MD.210139	.1	.0	■
1.40	10.10	11.5	1.5	30	2.MD.210140	.1	.0	■
1.41	10.09	11.5	1.5	30	2.MD.210141	.1	.0	■
1.42	10.08	11.5	1.5	30	2.MD.210142	.1	.0	■
1.43	10.07	11.5	1.5	30	2.MD.210143	.1	.0	■
1.44	10.06	11.5	1.5	30	2.MD.210144	.1	.0	■
1.45	10.05	11.5	1.5	30	2.MD.210145	.1	.0	■
1.46	10.04	11.5	1.5	30	2.MD.210146	.1	.0	■
1.47	10.03	11.5	1.5	30	2.MD.210147	.1	.0	■
1.48	10.02	11.5	1.5	30	2.MD.210148	.1	.0	■
1.49	10.01	11.5	1.5	30	2.MD.210149	.1	.0	■
1.50	10.50	12.0	2.0	38	2.MD.210150	.1	.0	■
1.51	10.49	12.0	2.0	38	2.MD.210151	.1	.0	■

d ₁	l ₁	l ₂	D (h6)	L	Item number	Coated	Uncoated	Availability
[mm]	[mm]	[mm]	[mm]	[mm]				
1.52	10.48	12.0	2.0	38	2.MD.210152	.1	.0	■
1.53	10.47	12.0	2.0	38	2.MD.210153	.1	.0	■
1.54	10.46	12.0	2.0	38	2.MD.210154	.1	.0	■
1.55	10.45	12.0	2.0	38	2.MD.210155	.1	.0	■
1.56	10.44	12.0	2.0	38	2.MD.210156	.1	.0	■
1.57	10.43	12.0	2.0	38	2.MD.210157	.1	.0	■
1.58	10.42	12.0	2.0	38	2.MD.210158	.1	.0	■
1.59	10.41	12.0	2.0	38	2.MD.210159	.1	.0	■
1.60	10.40	12.0	2.0	38	2.MD.210160	.1	.0	■
1.61	10.39	12.0	2.0	38	2.MD.210161	.1	.0	■
1.62	10.38	12.0	2.0	38	2.MD.210162	.1	.0	■
1.63	10.37	12.0	2.0	38	2.MD.210163	.1	.0	■
1.64	10.36	12.0	2.0	38	2.MD.210164	.1	.0	■
1.65	10.35	12.0	2.0	38	2.MD.210165	.1	.0	■
1.66	10.34	12.0	2.0	38	2.MD.210166	.1	.0	■
1.67	10.33	12.0	2.0	38	2.MD.210167	.1	.0	■
1.68	10.32	12.0	2.0	38	2.MD.210168	.1	.0	■
1.69	10.31	12.0	2.0	38	2.MD.210169	.1	.0	■
1.70	10.30	12.0	2.0	38	2.MD.210170	.1	.0	■
1.71	10.29	12.0	2.0	38	2.MD.210171	.1	.0	■
1.72	10.28	12.0	2.0	38	2.MD.210172	.1	.0	■
1.73	10.27	12.0	2.0	38	2.MD.210173	.1	.0	■
1.74	10.26	12.0	2.0	38	2.MD.210174	.1	.0	■
1.75	10.25	12.0	2.0	38	2.MD.210175	.1	.0	■
1.76	10.24	12.0	2.0	38	2.MD.210176	.1	.0	■
1.77	10.23	12.0	2.0	38	2.MD.210177	.1	.0	■
1.78	10.22	12.0	2.0	38	2.MD.210178	.1	.0	■
1.79	10.21	12.0	2.0	38	2.MD.210179	.1	.0	■
1.80	10.20	12.0	2.0	38	2.MD.210180	.1	.0	■
1.81	10.19	12.0	2.0	38	2.MD.210181	.1	.0	■
1.82	10.18	12.0	2.0	38	2.MD.210182	.1	.0	■
1.83	10.17	12.0	2.0	38	2.MD.210183	.1	.0	■
1.84	10.16	12.0	2.0	38	2.MD.210184	.1	.0	■
1.85	10.15	12.0	2.0	38	2.MD.210185	.1	.0	■
1.86	10.14	12.0	2.0	38	2.MD.210186	.1	.0	■
1.87	10.13	12.0	2.0	38	2.MD.210187	.1	.0	■



d ₁	l ₁	l ₂	D (h6)	L	Item number	Coated	Uncoated	Availability
[mm]	[mm]	[mm]	[mm]	[mm]				
1.88	10.12	12.0	2.0	38	2.MD.210188	.1	.0	■
1.89	10.11	12.0	2.0	38	2.MD.210189	.1	.0	■
1.90	10.10	12.0	2.0	38	2.MD.210190	.1	.0	■
1.91	10.09	12.0	2.0	38	2.MD.210191	.1	.0	■
1.92	10.08	12.0	2.0	38	2.MD.210192	.1	.0	■
1.93	10.07	12.0	2.0	38	2.MD.210193	.1	.0	■
1.94	10.06	12.0	2.0	38	2.MD.210194	.1	.0	■
1.95	10.05	12.0	2.0	38	2.MD.210195	.1	.0	■
1.96	10.04	12.0	2.0	38	2.MD.210196	.1	.0	■
1.97	10.03	12.0	2.0	38	2.MD.210197	.1	.0	■
1.98	10.02	12.0	2.0	38	2.MD.210198	.1	.0	■
1.99	10.01	12.0	2.0	38	2.MD.210199	.1	.0	■
2.00	10.00	12.0	3.0	38	2.MD.210200	.1	.0	■
2.05	9.95	12.0	3.0	38	2.MD.210205	.1	.0	■
2.10	9.90	12.0	3.0	38	2.MD.210210	.1	.0	■
2.15	9.85	12.0	3.0	38	2.MD.210215	.1	.0	■
2.20	9.80	12.0	3.0	38	2.MD.210220	.1	.0	■
2.25	9.75	12.0	3.0	38	2.MD.210225	.1	.0	■
2.30	9.70	12.0	3.0	38	2.MD.210230	.1	.0	■
2.35	9.65	12.0	3.0	38	2.MD.210235	.1	.0	■
2.40	9.60	12.0	3.0	38	2.MD.210240	.1	.0	■
2.45	9.55	12.0	3.0	38	2.MD.210245	.1	.0	■
2.50	9.50	12.0	3.0	38	2.MD.210250	.1	.0	■
2.55	9.45	12.0	3.0	38	2.MD.210255	.1	.0	■
2.60	9.40	12.0	3.0	38	2.MD.210260	.1	.0	■
2.65	9.35	12.0	3.0	38	2.MD.210265	.1	.0	■
2.70	9.30	12.0	3.0	38	2.MD.210270	.1	.0	■
2.75	9							

MiquDrill 210 - coated

RECOMMENDATION FOR USE
● Excellent | ● Good | ○ Acceptable | ⊗ Not recommended

P	N	S ₃	⊗
M	S ₁	H ₁	⊗
K	S ₂	H ₂	⊗


DRILLING WITH EXTERNAL COOLING | CUTTING DATA OVERVIEW





Materials group	Material	Mat. no.	DIN	AISI/ASTM/UNS	v _c [m/min]	Q ₁	Q ₂	f [mm/rev]						
								0.3–0.6 mm	0.6–1.0 mm	Ød1				
								1.0–1.5 mm	1.5–2.0 mm	2.0–3.0 mm				
								f	f	f	f	f		
P	Unalloyed carbon steel Rm < 800 N/mm ²	1.0301	C10	AISI 1010	40 – 70	2xd1	1xd1	0.009	0.016	0.023	0.033	0.045		
		1.0401	C15	AISI 1015										
		1.1191	C45E/CK45	AISI 1045										
		1.0044	S275JR	AISI 1020										
		1.0715	11SMn30	AISI 1215										
	Low alloyed steel Rm > 900 N/mm ²	1.5752	15NiCr13	ASTM 3415 / AISI 3310	30 – 40	2xd1	1xd1	0.007	0.011	0.015	0.023	0.035		
		1.7131	16MnCr5	AISI 5115										
		1.3505	100Cr6	AISI 52100										
		1.7225	42CrMo4	AISI 4140										
		1.2842	90MnCrV8	AISI O2										
	High alloyed tool steel Rm < 1200 N/mm ²	1.2379	X153CrMoV12	AISI D2	30 – 60	2xd1	1xd1	0.004	0.009	0.014	0.020	0.028		
		1.2436	X210CrW12	AISI D4/D6										
1.3343		HS6-5-2C	AISI M2 / UNS T11302											
1.3355		HS18-0-1	AISI T1 / UNS T12001											
M	Stainless steel ferritic	1.4016	X6Cr17	AISI 430 / UNS S43000	30 – 70	2xd1	1xd1	0.007	0.013	0.023	0.030	0.045		
		1.4105	X6CrMoS17	AISI 430F										
		1.4034	X46Cr13	AISI 420C										
	Stainless steel martensitic	1.4112	X90CrMoV18	AISI 440B										
		1.4542	X5CrNiCuNb 16-4	AISI 630 / ASTM 17-4 PH										
		1.4545	X5CrNiCuNb 15-5	ASTM 15-5 PH										
	Stainless steel martensitic – PH	1.4301	X5CrNi 18-10	AISI 304										
		1.4435	X2CrNiMo 18-14-3	AISI 316L										
		1.4441	X2CrNiMo 18-15-3	AISI 316LM										
Stainless steel austenitic	1.4539	X1NiCrMoCu 25-20-5	AISI 904L											
K	Cast iron	0.6020	GG20	ASTM 30	30 – 70	2xd1	1xd1	0.007	0.013	0.023	0.030	0.045		
		0.6030	GG30	ASTM 40B										
		0.7040	GGG40	ASTM 60-40-18										
		0.7060	GGG60	ASTM 80-60-03										
N	Aluminium alloy wrought	3.2315	AlMgSi1	ASTM 6351	80 – 150	2xd1	1xd1	0.010	0.023	0.038	0.050	0.070		
		3.4365	AlZnMgCu1.5	ASTM 7075										
	Aluminium alloy cast	3.2163	GD-AlSi9Cu3	ASTM A380	60 – 100	2xd1	1xd1	0.008	0.019	0.030	0.045	0.060		
		3.2381	GD-AlSi10Mg	UNS A03590										
	Copper	2.004	Cu-OF / CW008A	UNS C10100	40 – 70	2xd1	1xd1	0.008	0.014	0.023	0.030	0.045		
		2.0065	Cu-ETP / CW004A	UNS C11000										
	Brass lead free	2.0321	CuZn37 CW508L	UNS C27400	40 – 70	2xd1	1xd1	0.008	0.014	0.023	0.030	0.045		
		2.036	CuZn40 CW509L	UNS C28000										
	Brass, Bronze Rm < 400 N/mm ²	2.0401	CuZn39Pb3 / CW614N	UNS C38500	40 – 150	2xd1	1xd1	0.008	0.017	0.030	0.045	0.065		
		2.102	CuSn6	UNS C51900										
Bronze Rm < 600 N/mm ²	2.0966	CuAl10Ni5Fe4	UNS C63000	30 – 40	2xd1	1xd1	0.007	0.011	0.015	0.023	0.035			
	2.096	CuAl9Mn2	UNS C63200											
S ₁	Super alloys	2.4856		Inconel 625										
		2.4668		Inconel 718										
		2.4617	NiMo28	Hastelloy B-2										
		2.4665	NiCr22Fe18Mo	Hastelloy X										
S ₂	Titanium pure	3.7035	Gr.2	ASTM B348 / F67										
		3.7065	Gr.4	ASTM B348 / F68										
S ₃	Titanium alloys	3.7165	TiAl6V4	ASTM B348 / F136										
		9.9367	TiAl6Nb7	ASTM F1295										
H ₁	Hardened steel < 55 HRC	2.4964	CoCr20W15Ni	Haynes 25										
			CrCoMo28	ASTM F1537										
H ₂	Hardened steel ≥ 55 HRC	1.2510	100MnCrMoW4	AISI O1	20 – 40	0.5xd1	0.5xd1	0.003	0.004	0.007	0.009	0.009		
		1.2379	X153CrMoV12	AISI D2										

MiquDrill 210 - uncoated

RECOMMENDATION FOR USE
● Excellent | ● Good | ○ Acceptable | ⊗ Not recommended



DRILLING WITH EXTERNAL COOLING | CUTTING DATA OVERVIEW



Materials group	Material	Mat. no.	DIN	AISI/ASTM/UNS	v _c [m/min]	Q ₁	Q ₂	f [mm/rev]					
								Ød1					
								0.1–0.3 mm f	0.3–0.6 mm f	0.6–1.0 mm f	1.0–1.5 mm f	1.5–2.0 mm f	2.0–3.0 mm f
P	Unalloyed carbon steel Rm < 800 N/mm ²	1.0301	C10	AISI 1010	30–60	2xd1	1xd1	0.003	0.009	0.016	0.023	0.033	0.045
		1.0401	C15	AISI 1015									
		1.1191	C45E/CK45	AISI 1045									
		1.0044	S275JR	AISI 1020									
		1.0715	11SMn30	AISI 1215									
	Low alloyed steel Rm > 900 N/mm ²	1.5752	15NiCr13	ASTM 3415 / AISI 3310	25–40	2xd1	1xd1	0.003	0.007	0.011	0.015	0.023	0.035
		1.7131	16MnCr5	AISI 5115									
		1.3505	100Cr6	AISI 52100									
		1.7225	42CrMo4	AISI 4140									
		1.2842	90MnCrV8	AISI O2									
	High alloyed tool steel Rm < 1200 N/mm ²	1.2379	X153CrMoV12	AISI D2	25–40	2xd1	1xd1	0.002	0.004	0.009	0.014	0.020	0.028
		1.2436	X210CrW12	AISI D4/D6									
1.3343		HS6-5-2C	AISI M2 / UNS T11302										
1.3355		HS18-0-1	AISI T1 / UNS T12001										
M	Stainless steel ferritic	1.4016	X6Cr17	AISI 430 / UNS S43000	25–60	2xd1	1xd1	0.003	0.007	0.013	0.023	0.030	0.045
		1.4105	X6CrMoS17	AISI 430F									
		1.4034	X46Cr13	AISI 420C									
	Stainless steel martensitic	1.4112	X90CrMoV18	AISI 440B									
		1.4542	X5CrNiCuNb 16-4	AISI 630 / ASTM 17-4 PH									
		1.4545	X5CrNiCuNb 15-5	ASTM 15-5 PH									
	Stainless steel martensitic – PH	1.4301	X5CrNi 18-10	AISI 304									
		1.4435	X2CrNiMo 18-14-3	AISI 316L									
		1.4441	X2CrNiMo 18-15-3	AISI 316LM									
Stainless steel austenitic	1.4539	X1NiCrMoCu 25-20-5	AISI 904L										
K	Cast iron	0.6020	GG20	ASTM 30	25–60	2xd1	1xd1	0.003	0.007	0.013	0.023	0.030	0.045
		0.6030	GG30	ASTM 40B									
		0.7040	GGG40	ASTM 60-40-18									
		0.7060	GGG60	ASTM 80-60-03									
N	Aluminium alloy wrought	3.2315	AlMgSi1	ASTM 6351	50–100	2xd1	1xd1	0.006	0.010	0.023	0.038	0.050	0.070
		3.4365	AlZnMgCu1.5	ASTM 7075									
	Aluminium alloy cast	3.2163	GD-AlSi9Cu3	ASTM A380									
		3.2381	GD-AlSi10Mg	UNS A03590									
	Copper	2.004	Cu-OF / CW008A	UNS C10100									
		2.0065	Cu-ETP / CW004A	UNS C11000									
	Brass lead free	2.0321	CuZn37 CW508L	UNS C27400									
		2.036	CuZn40 CW509L	UNS C28000									
	Brass, Bronze Rm < 400 N/mm ²	2.0401	CuZn39Pb3 / CW614N	UNS C38500									
		2.102	CuSn6	UNS C51900									
Bronze Rm < 600 N/mm ²	2.0966	CuAl10Ni5Fe4	UNS C63000										
	2.096	CuAl9Mn2	UNS C63200										
S ₁	Super alloys	2.4856		Inconel 625									
		2.4668		Inconel 718									
		2.4617	NiMo28	Hastelloy B-2									
		2.4665	NiCr22Fe18Mo	Hastelloy X									
S ₂	Titanium pure	3.7035	Gr.2	ASTM B348 / F67									
		3.7065	Gr.4	ASTM B348 / F68									
S ₃	Titanium alloys	3.7165	TiAl6V4	ASTM B348 / F136									
		9.9367	TiAl6Nb7	ASTM F1295									
H ₁	Hardened steel < 55 HRC	2.4964	CoCr20W15Ni	Haynes 25									
			CrCoMo28	ASTM F1537									
H ₂	Hardened steel ≥ 55 HRC	1.2510	100MnCrMoW4	AISI O1									
		1.2379	X153CrMoV12	AISI D2									

Recommended: MiquDrill 210 - coated

Drilling process MiquDrill 210

QUICK AND ACCURATE DRILLING FROM 2.4 TO 8 X D

Coolant type, pressure, filtration and flowrate

For best results, Mikron Tool recommends the use of cutting oil as coolant fluid. Alternatively, emulsion of 8% or more with EP-Additives (Extreme-Pressure-Additives) can be used with good results as well.

For tools with external cooling no specific parameters have to be considered concerning filter and coolant pressure and quantity. But it must be ensured that the cooling medium is conducted directly to the drill tip, thus cooling and lubricating the drill perfectly and flushing away the chips.

Tool holders

For detailed indications for tool holders see chapter "Technical information".

MiquDrill 210

Due to the excellent self-centering of MiquDrill 210, a center or pilot drill is not obligatory on regular and straight surfaces.

Center drilling / pilot drilling and drilling

Higher requirements: On irregular and rough or inclined surfaces or for highest position accuracy and in general for drilling, Mikron Tool recommends:

- MiquDrill Centro 90° / 120° as centering drill
- MiquDrill 200 as pilot drill
- CrazyDrill Crosspilot as pilot drill on inclined surfaces (from Ø 0.4 mm)

Pilot drilling with MiquDrill 200 or centering with MiquDrill Centro is the perfect starting position for precise drilling (position and alignment accuracy) and a stable machining process. The same does the pilot drill CrazyDrill Crosspilot when drilling on inclined surfaces.

The quality of drilling (position and alignment accuracy and stable machining process) are assured.

DRILLING PROCESS


Drilling according DIN 66025 / PAL

G83 deep-drilling cycle with chip break and chip removal (pecks)

Q = depth of the respective peck


1 | CENTER OR PILOT DRILLING (ONLY IF NECESSARY)

- With MiquDrill Centro 90° / 120° or MiquDrill 200 (irregular or rough surfaces) or CrazyDrill Crosspilot (inclined surfaces).

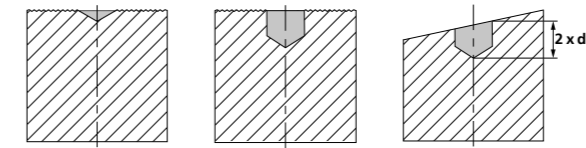


2 | DRILLING

- With MiquDrill 210 up to maximum drilling depth Q_1 (see cutting data table) in one step, afterwards remove chips.



- Additional pecks Q_x according to cutting data table, afterwards remove chips.



Note:

Between pecks, take the drill completely out of the hole.

After the drill reached desired cutting depth, return at increased feed rate (or in case of perfect conditions rapid traverse) to safety position.