
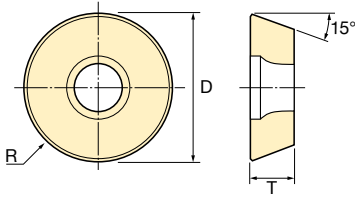



RDXX | Round Inserts for Indexable Milling Tools


Tolerance Class	Chip breaker	Parameter					Grades					
		Inserts	Dimensions				ATH Coat	JP Coat	TB Coat		PCA Coat	G Coat
			Item Code	D	R	T	Clamp Screw	JP4005	JP4020	TB6020	TB6045	CY250
H-class (with peripheral grind)	-	RDHX-0501M0EN	5	2.5	1.50	M2	WF222	WF221	ID Code			
		RDHX-07T1M0TN	7	3.5	1.99	M2.5	WF224	WF223				
		RDHX-0702M0TN	7	3.5	2.38	M2.5	WF226	WF225				
		RDHX-1003M0TN	10	5	3.18	M3.5	WF228	WF227				
		RDHX-12T3M0TN	12	6	3.97	M3.5	WF230	WF229				
M-class (No peripheral grind)	•	RDMT-0802M0TN	8	4	2.38	M3					WF477	
		RDMW-1003M0TN	10	5	3.18	M3.5			WF158	WF159	WF581	
		RDMT-10T3M0TN	10	5	3.97	M4					WF480	
		RDMW-12T3M0TN	12	6	3.97	M3.5			WF160	WF161	WF545	WF546
		RDMT-12T3M0TN	12	6	3.97	M3.5					WF509	
		RDMT-1204M0TN	12	6	4.76	M4		WF213				
		RDMT-1604M0TN	16	8	4.76	M5		WF214				
		RDMW-1604M0TN	16	8	4.76	M5			WF162	WF163	WF543	WF544

Round Inserts: General Information about Item Codes

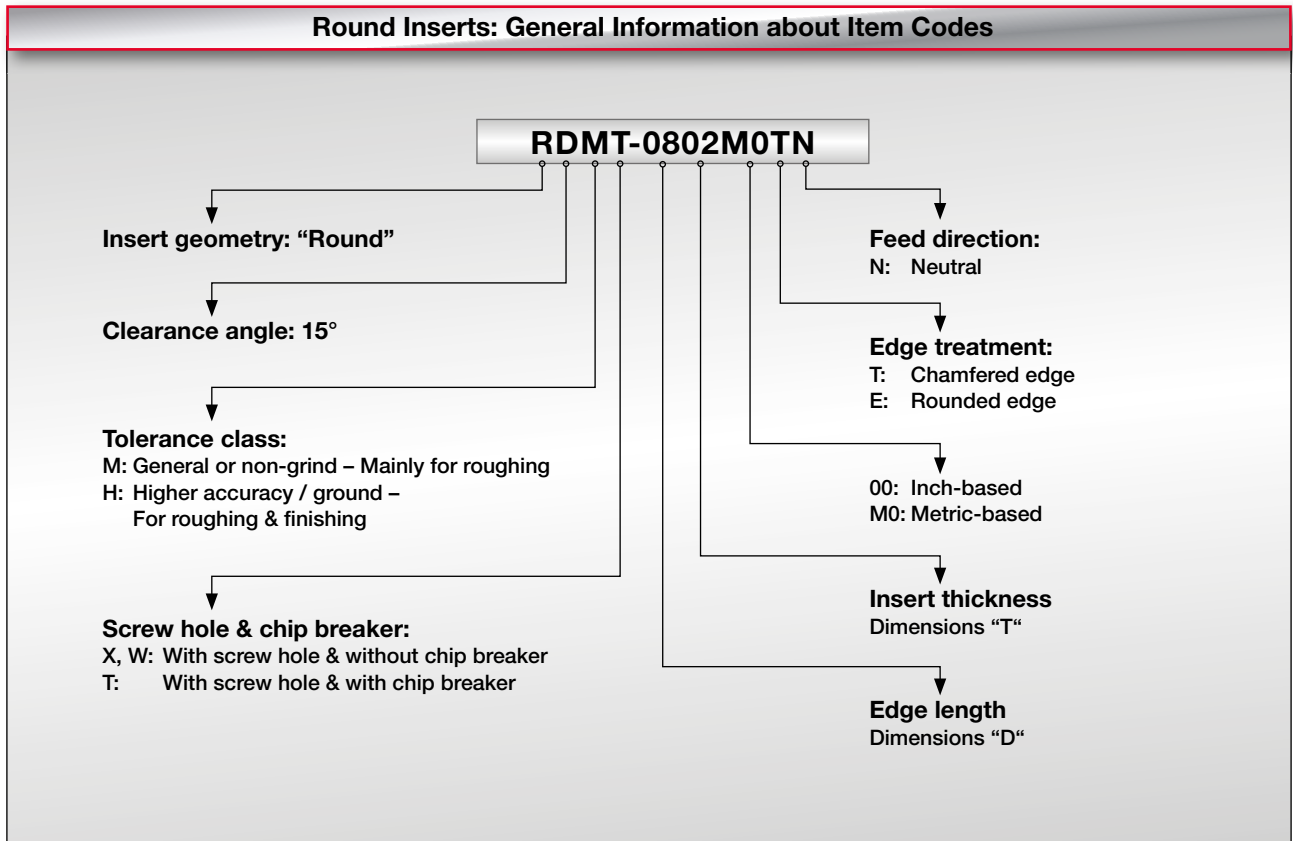


RDXX | Round Inserts for Indexable Milling Tools

